





CONCEPT 35

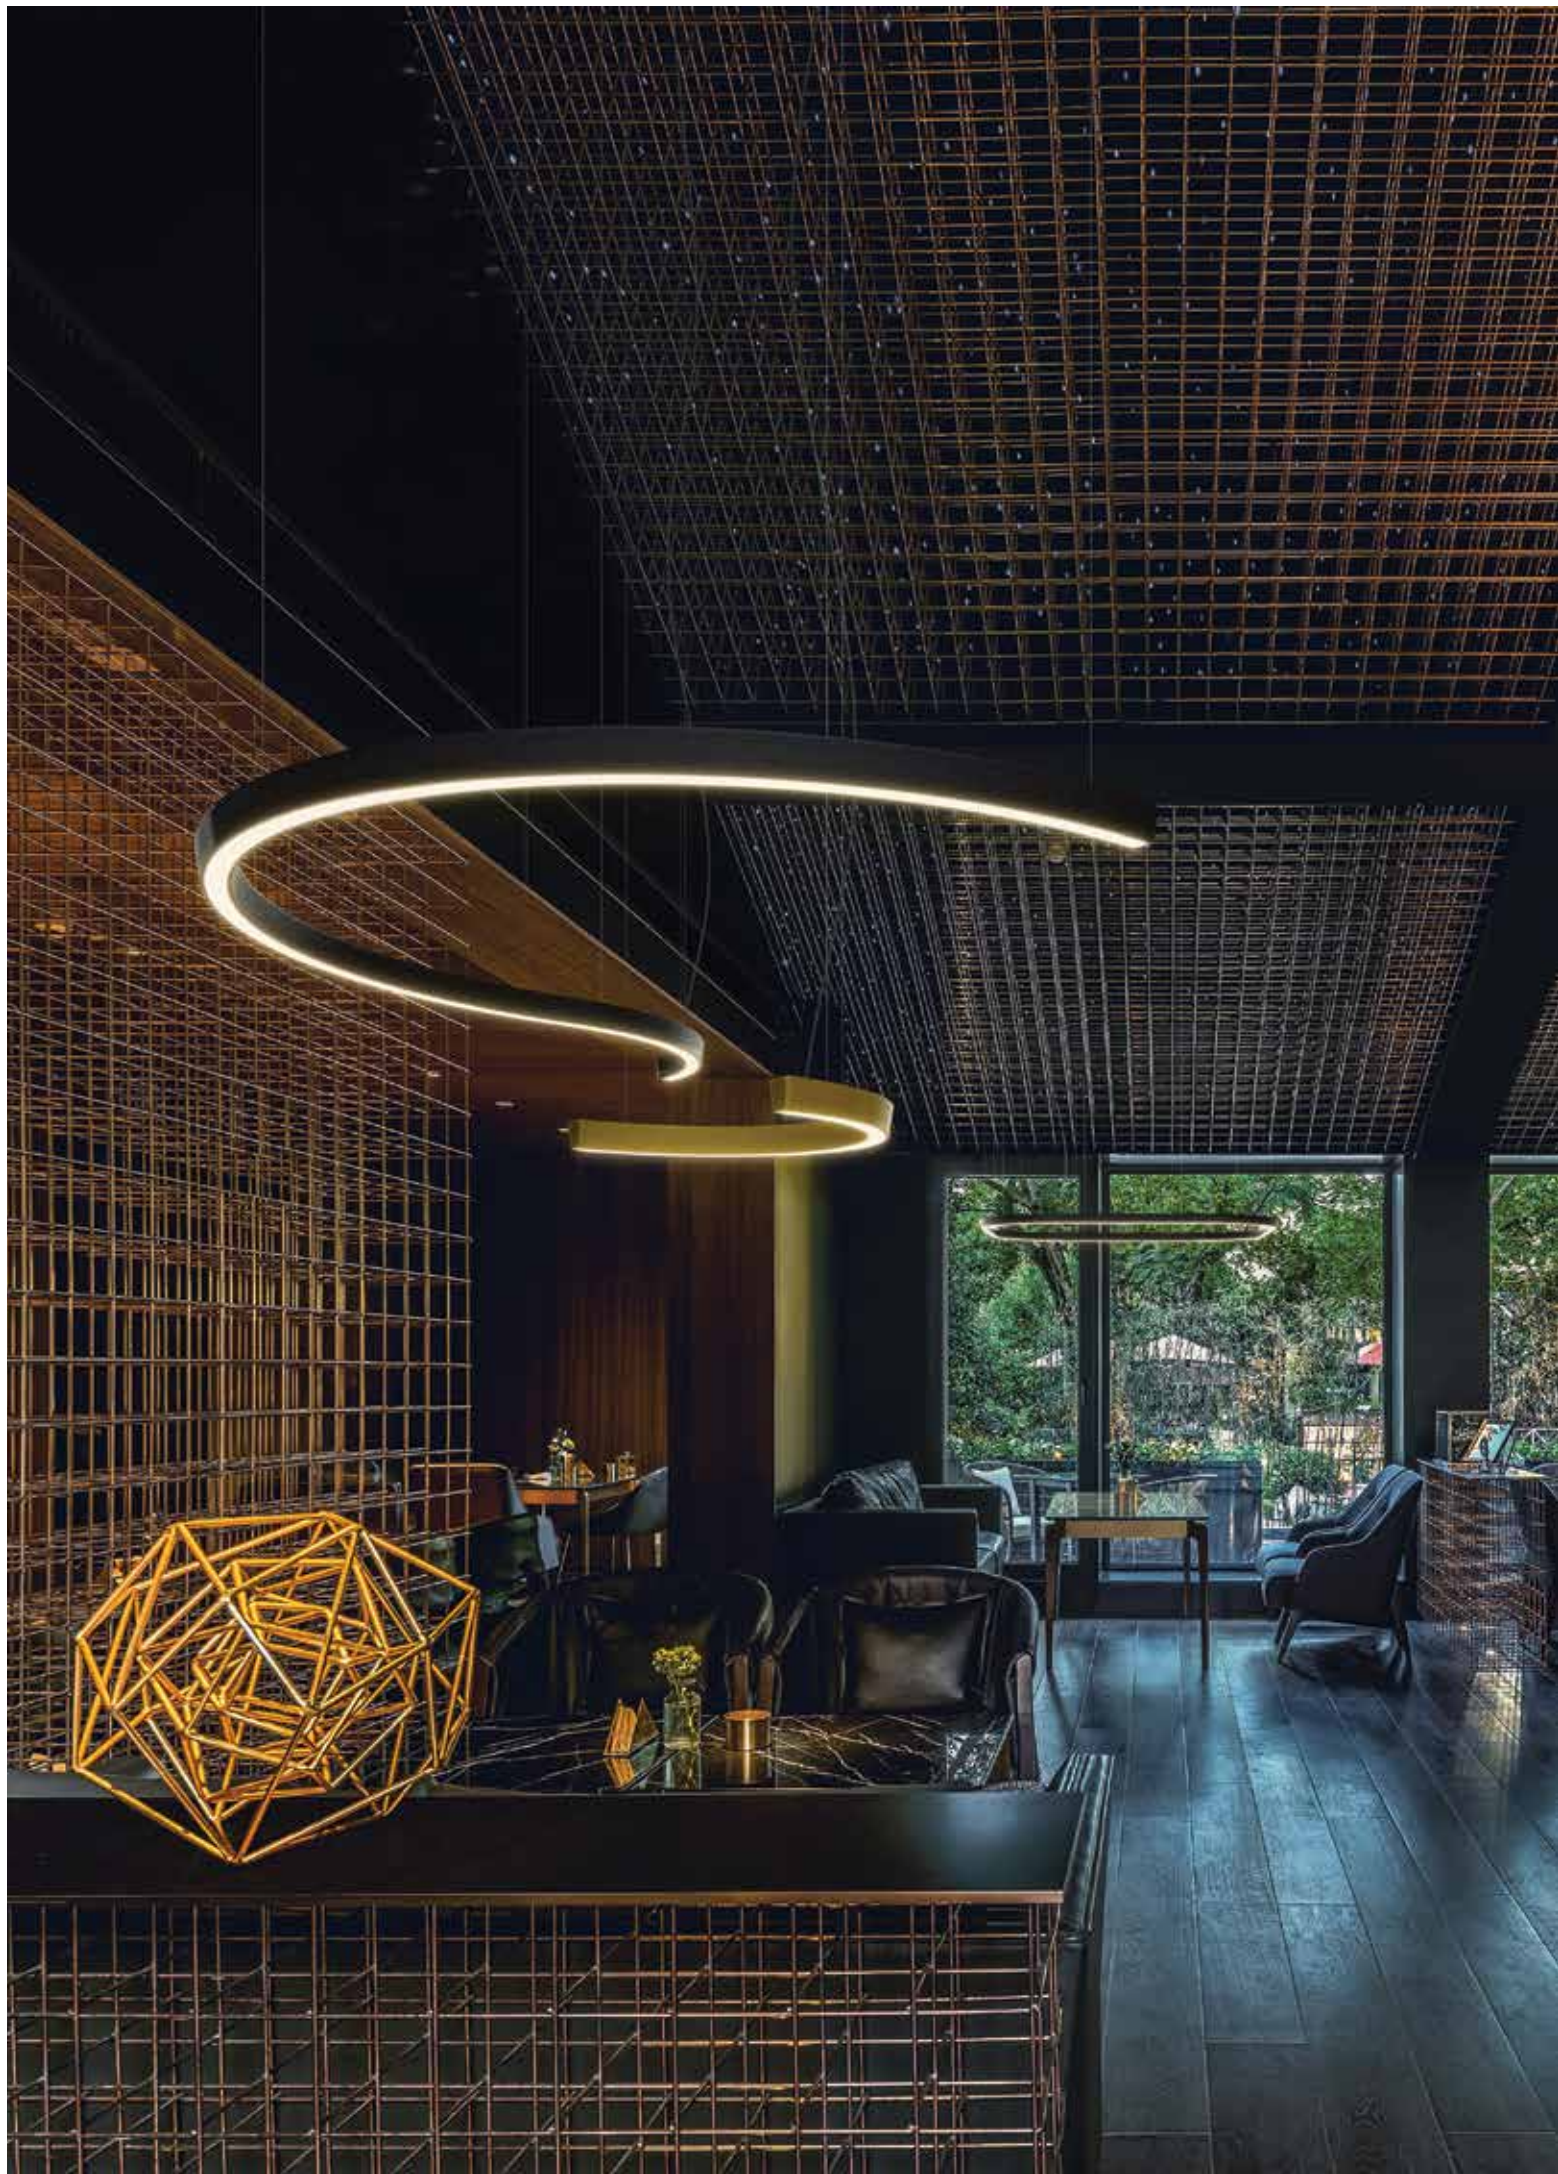

CONCEPT S 35 / E
90



CONCEPT S 35
94



CONCEPT S 35 D/I
98



CONCEPT O 35 / E
104



CONCEPT O 35
106



CONCEPT O 35 D/I
110



CONCEPT Sq 35
114



CONCEPT Sq 35 D/I
118




CONCEPT D 35
122



CONCEPT D 35 D/I
126



Application types

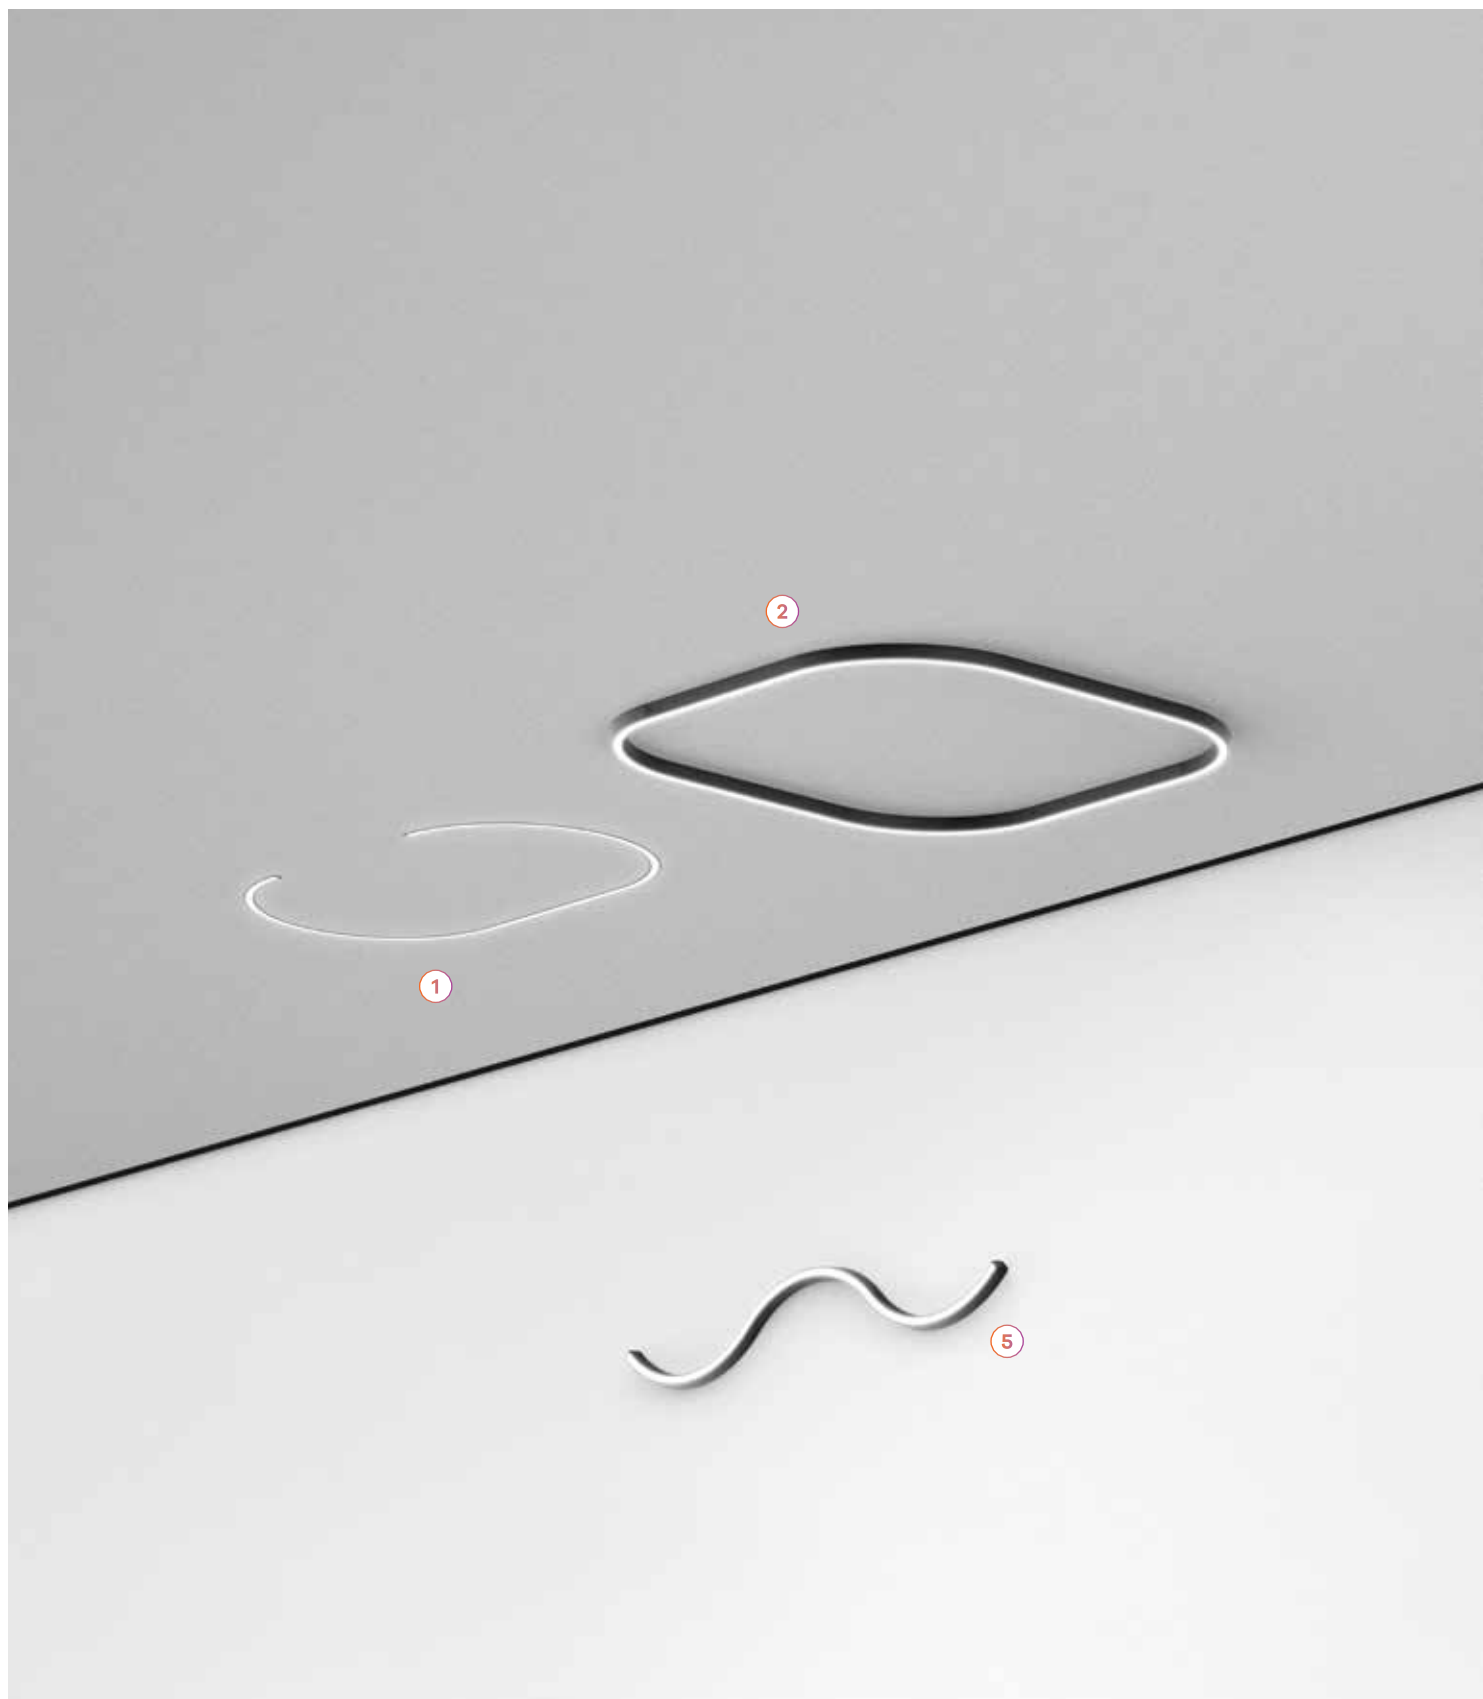




A modern look
for your space

1/16 (22,5°)




1/8 (45°)


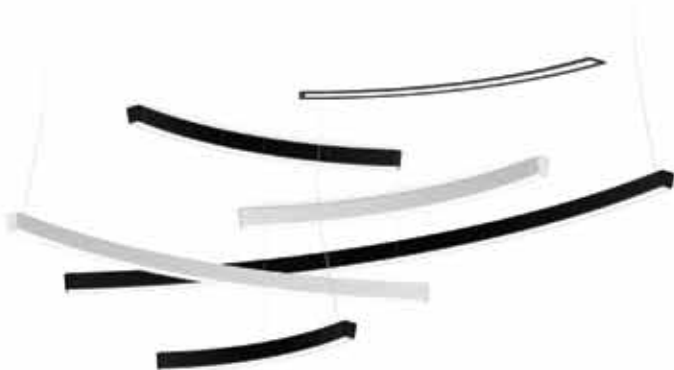


1/4 (90°)



1/2 (180°)

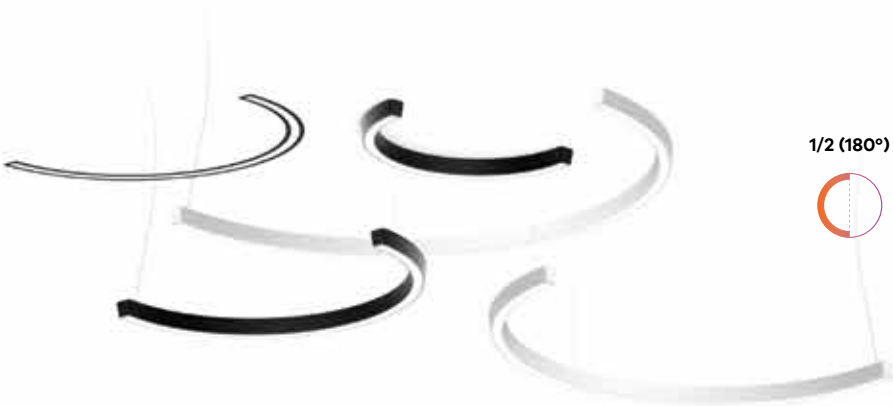


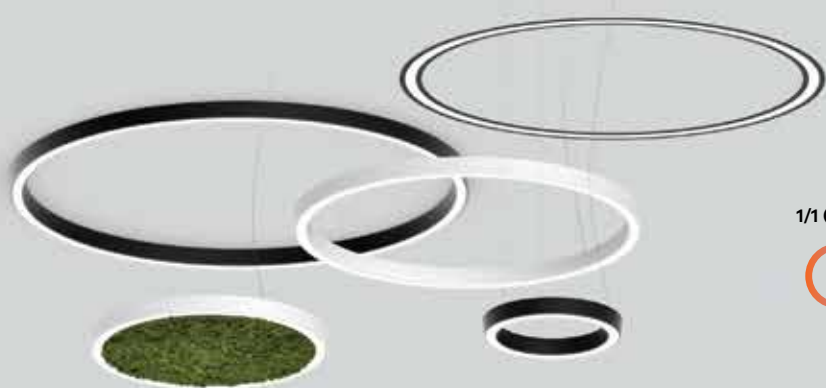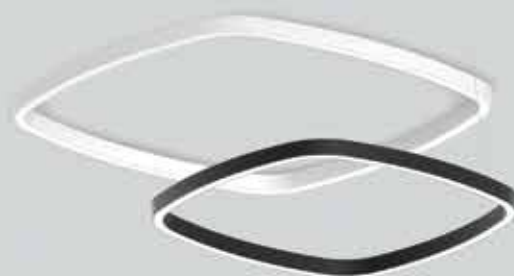

1/1 (360°)



LINEA

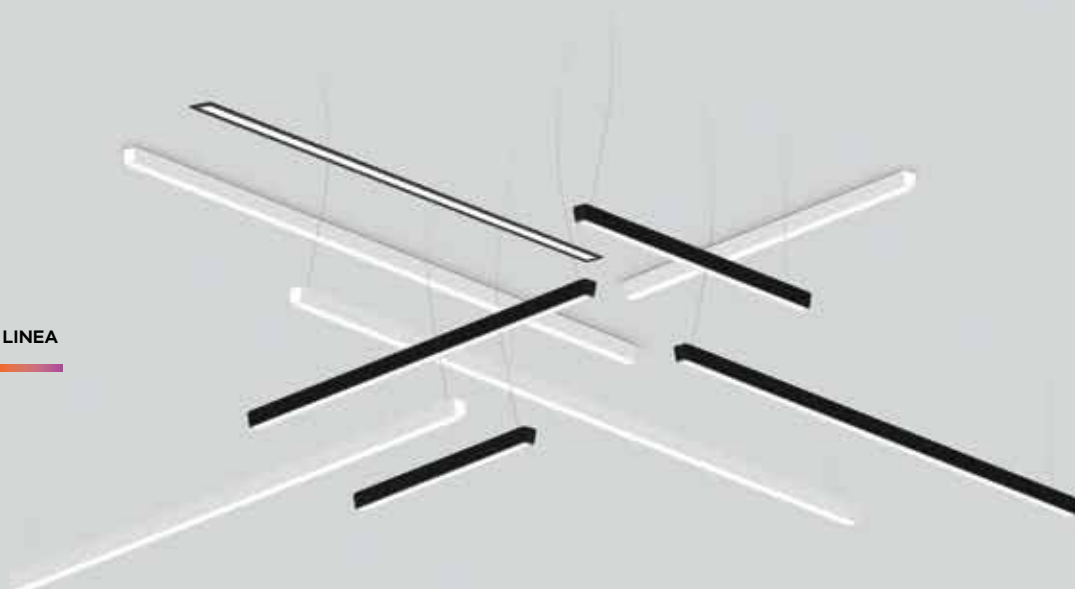

How to create spaces through light

Example 1



Example 2




Example 3



Example 4



1. bFLEX



Minimalism and technology

1. Body

Seamlessly welded aluminium profile, available in 12 colours.

2. LED

SDCM MacAdam ≤ 3 , 3000K / 4000K colour temperature, CRI > 80 and 50.000h lifetime L90 B10.

3. bFLEX

High-tech diffuser with opal version (bFLEX) that guarantees a soft and uniform light without visible spots. Special diffuser available in single roll of 5000, 15000 or 30000 mm.



4. End caps

Die cast aluminium end caps, without light leakage and with no visible screws. Available in the same colour as the product.

5. HPR

Inner high performance reflector in order to ensure high efficiency and uniform light.

6. Indirect light

Direct / indirect version with 80% / 20% light ratio and opal diffuser on the indirect part for light uniformity.

7. Dimmable DALI driver or HF

SwitchDIM under request.

8. Suspension and current supply cable

Suspensions and current supply cables available in 1500, 3000 or 6000 mm.


9. Ceiling rose

Recessed or surface mounted ceiling roses. Available in white or black colour.




10. Body connector

The end parts of the modules are manufactured in a way that there are no light leaks, whether it is a curved or linear version. The body connector kit includes a fast connector for the electrical part that guarantees a quick and easy installation.

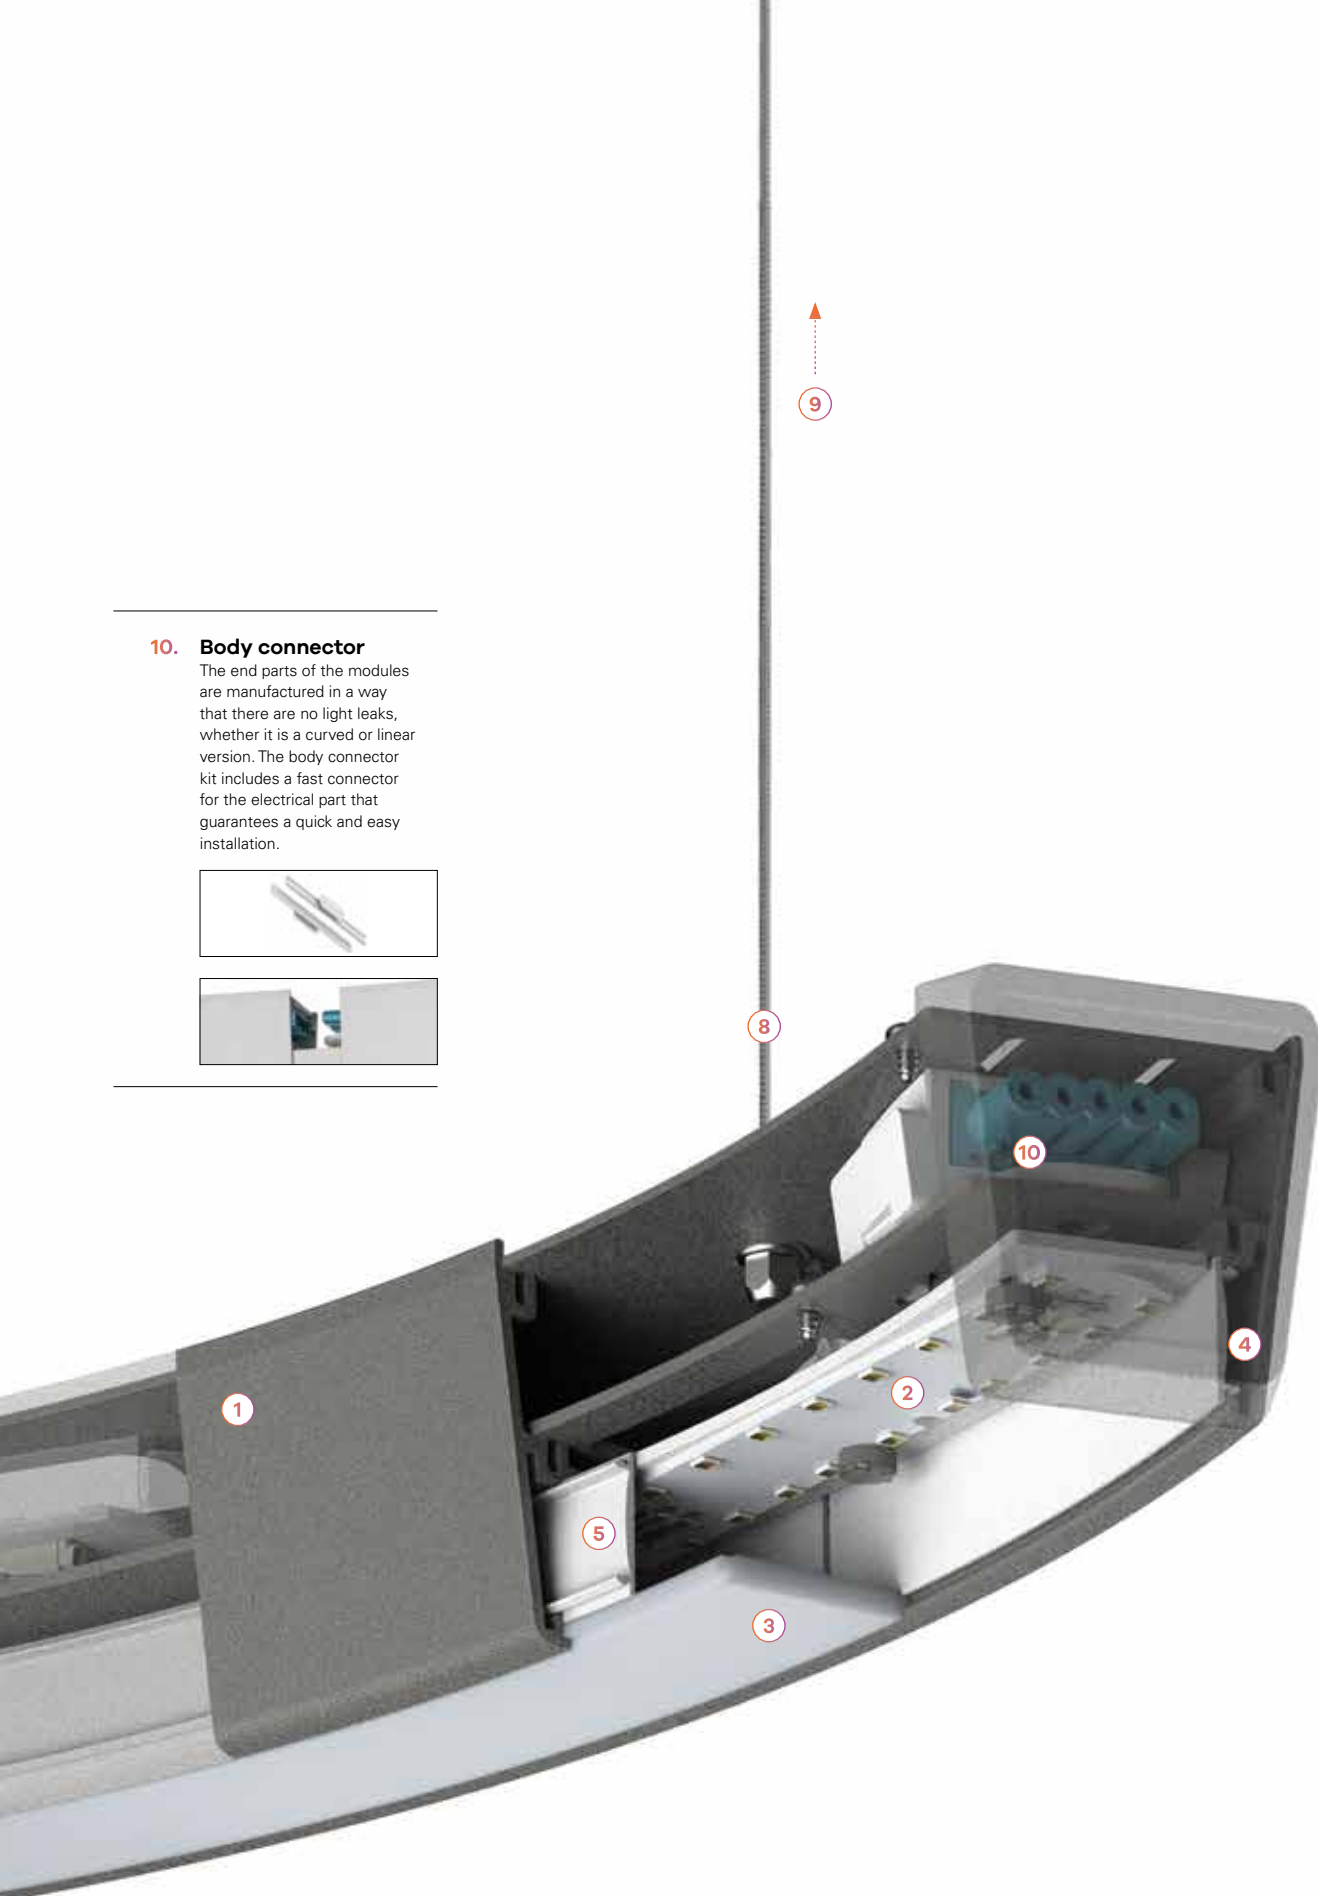


Modules composition

How to assemble a line (Upper view)

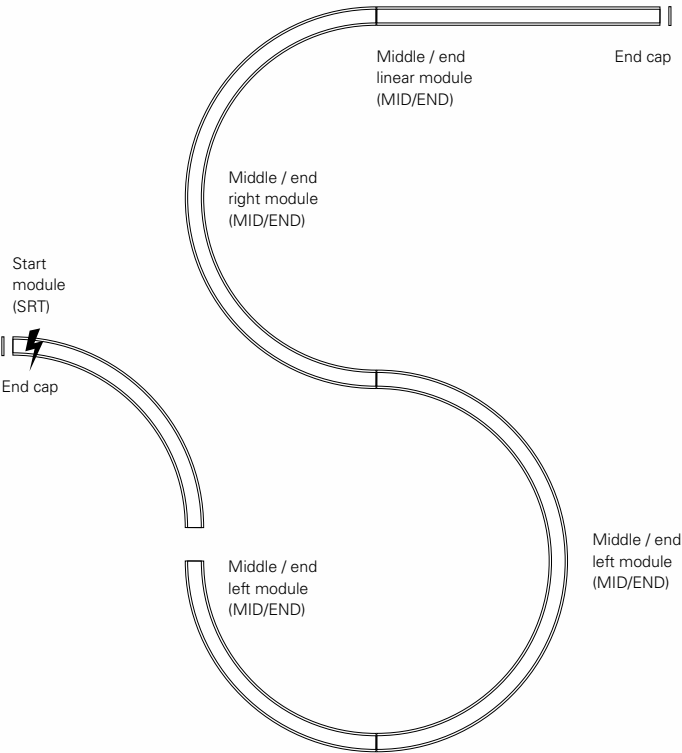

Available modules (Upper view)

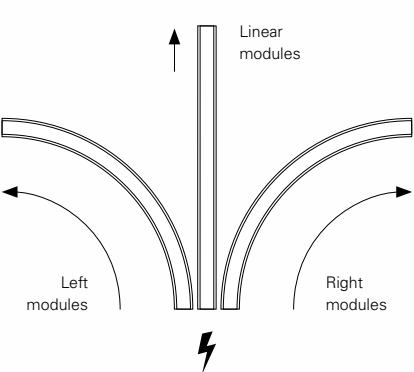

1. End caps

2. LED modules

2.1 Start module (SRT).

2.2 Middle / end module (MID/END).

3. Body connector

4. Ceiling roses


5. Current supply cable

6. Suspension


Recessed



Suspended, surface or wall mounted

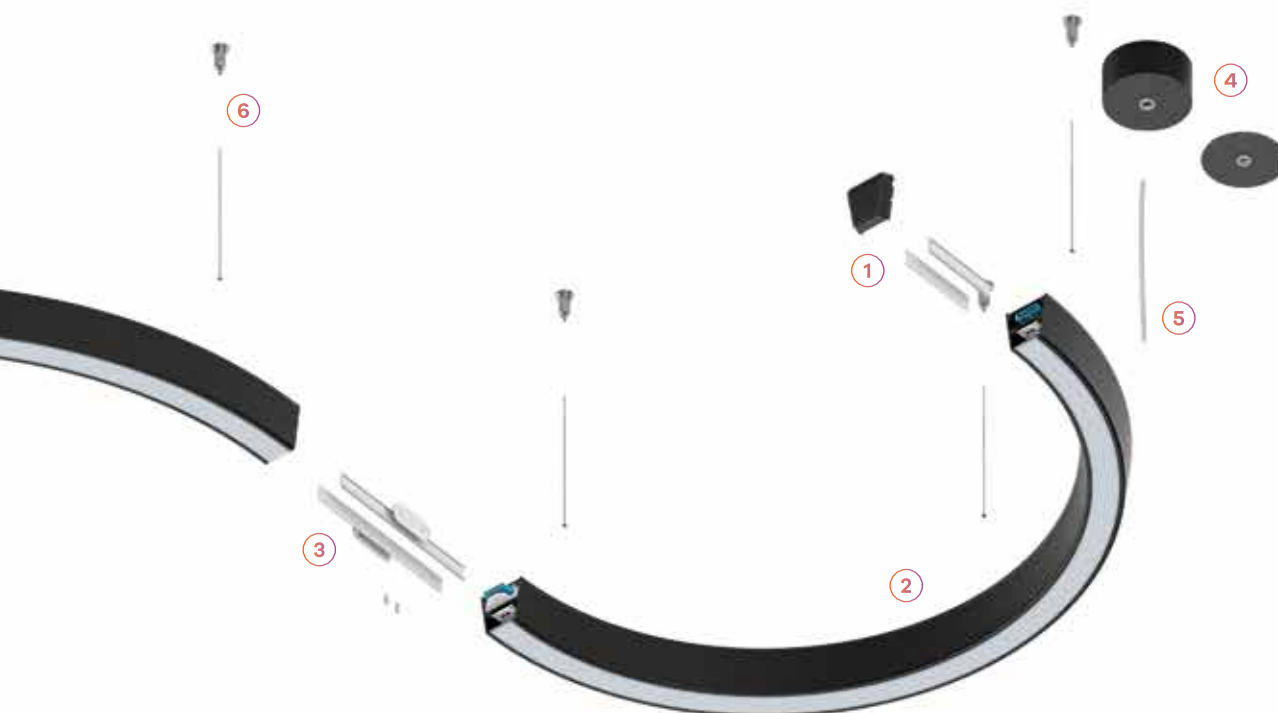

**An endless range
of possibilities**

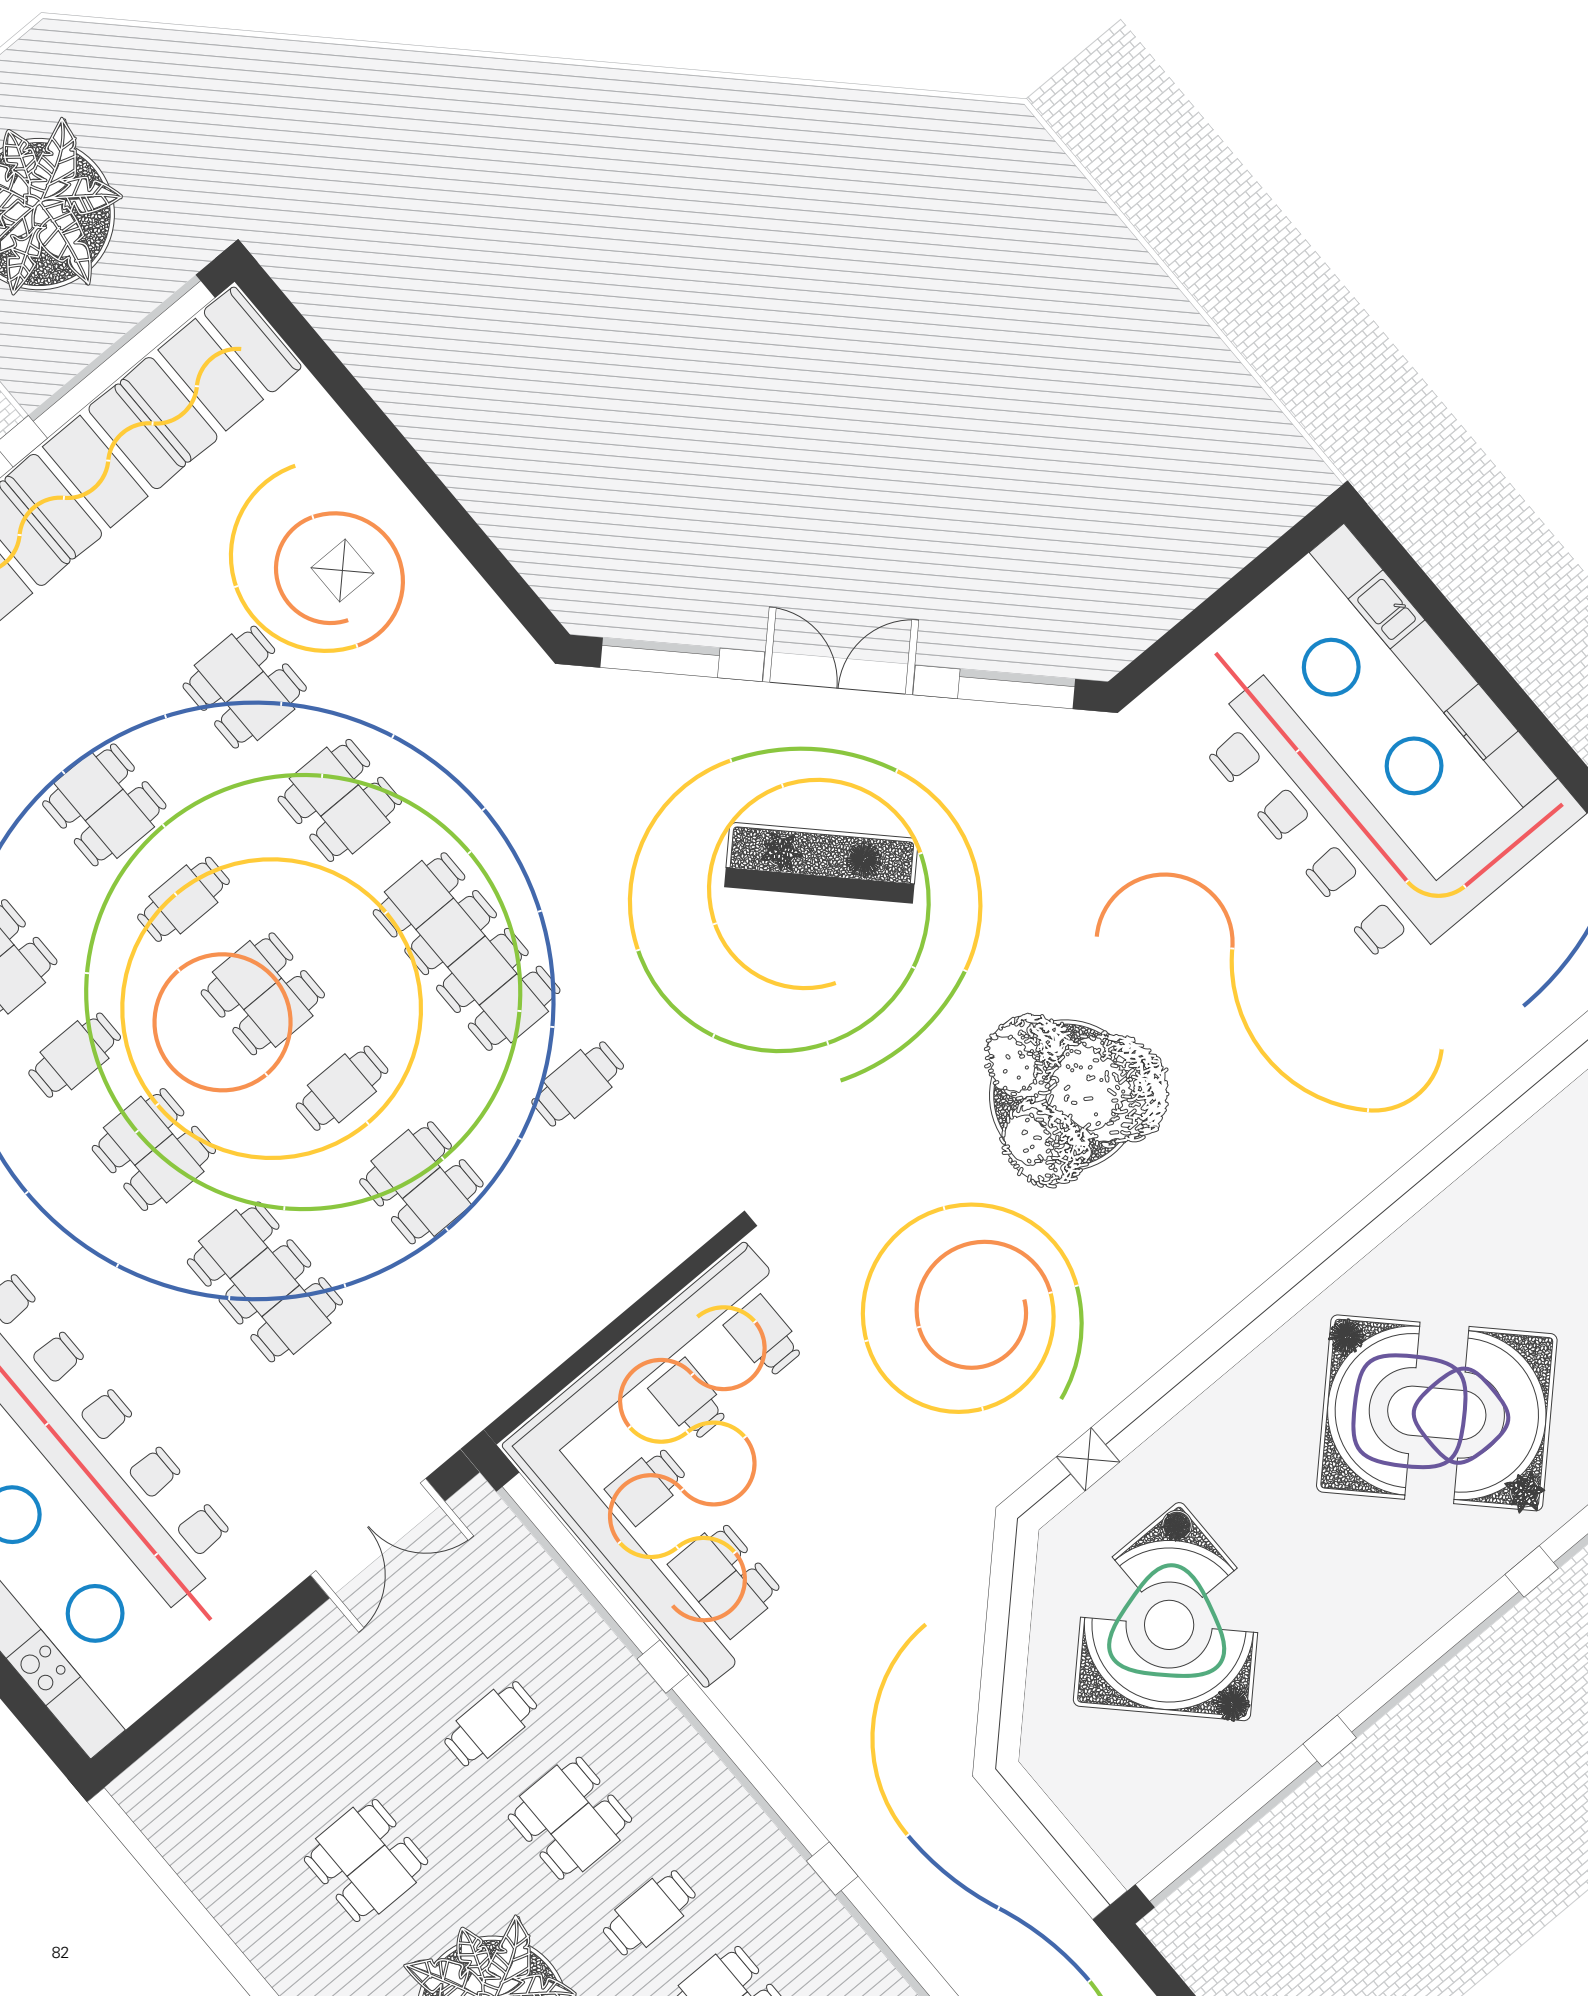

LINEA	1/16 (22,5°)	1/8 (45°)	1/4 (90°)	1/2 (180°)	1/1 (360°)
-------	--------------	-----------	-----------	------------	------------



≈843 mm	•				
≈1124 mm	•				
≈1405 mm	•				
≈1686 mm	•				
≈1967 mm	•				
≈2248 mm	•				
≈2529 mm	•				
≈2810 mm	•				
≈Ø455 mm					•
≈Ø777 mm				•	•
≈Ø1136 mm			•	•	•
≈Ø1494 mm			•	•	•
≈Ø1853 mm		•	•	•	
≈Ø2569 mm		•	•		
≈Ø2926 mm		•	•		
≈Ø4000 mm		•	•		
≈Ø5789 mm		•			
≈Ø7936 mm		•			

D	Sq






≈1126 mm	•
≈1187 mm	•
≈1441 mm	•
≈1465 mm	•

Available
modules




Scale
1:100
1000 mm

Define your colour



Design and elegance



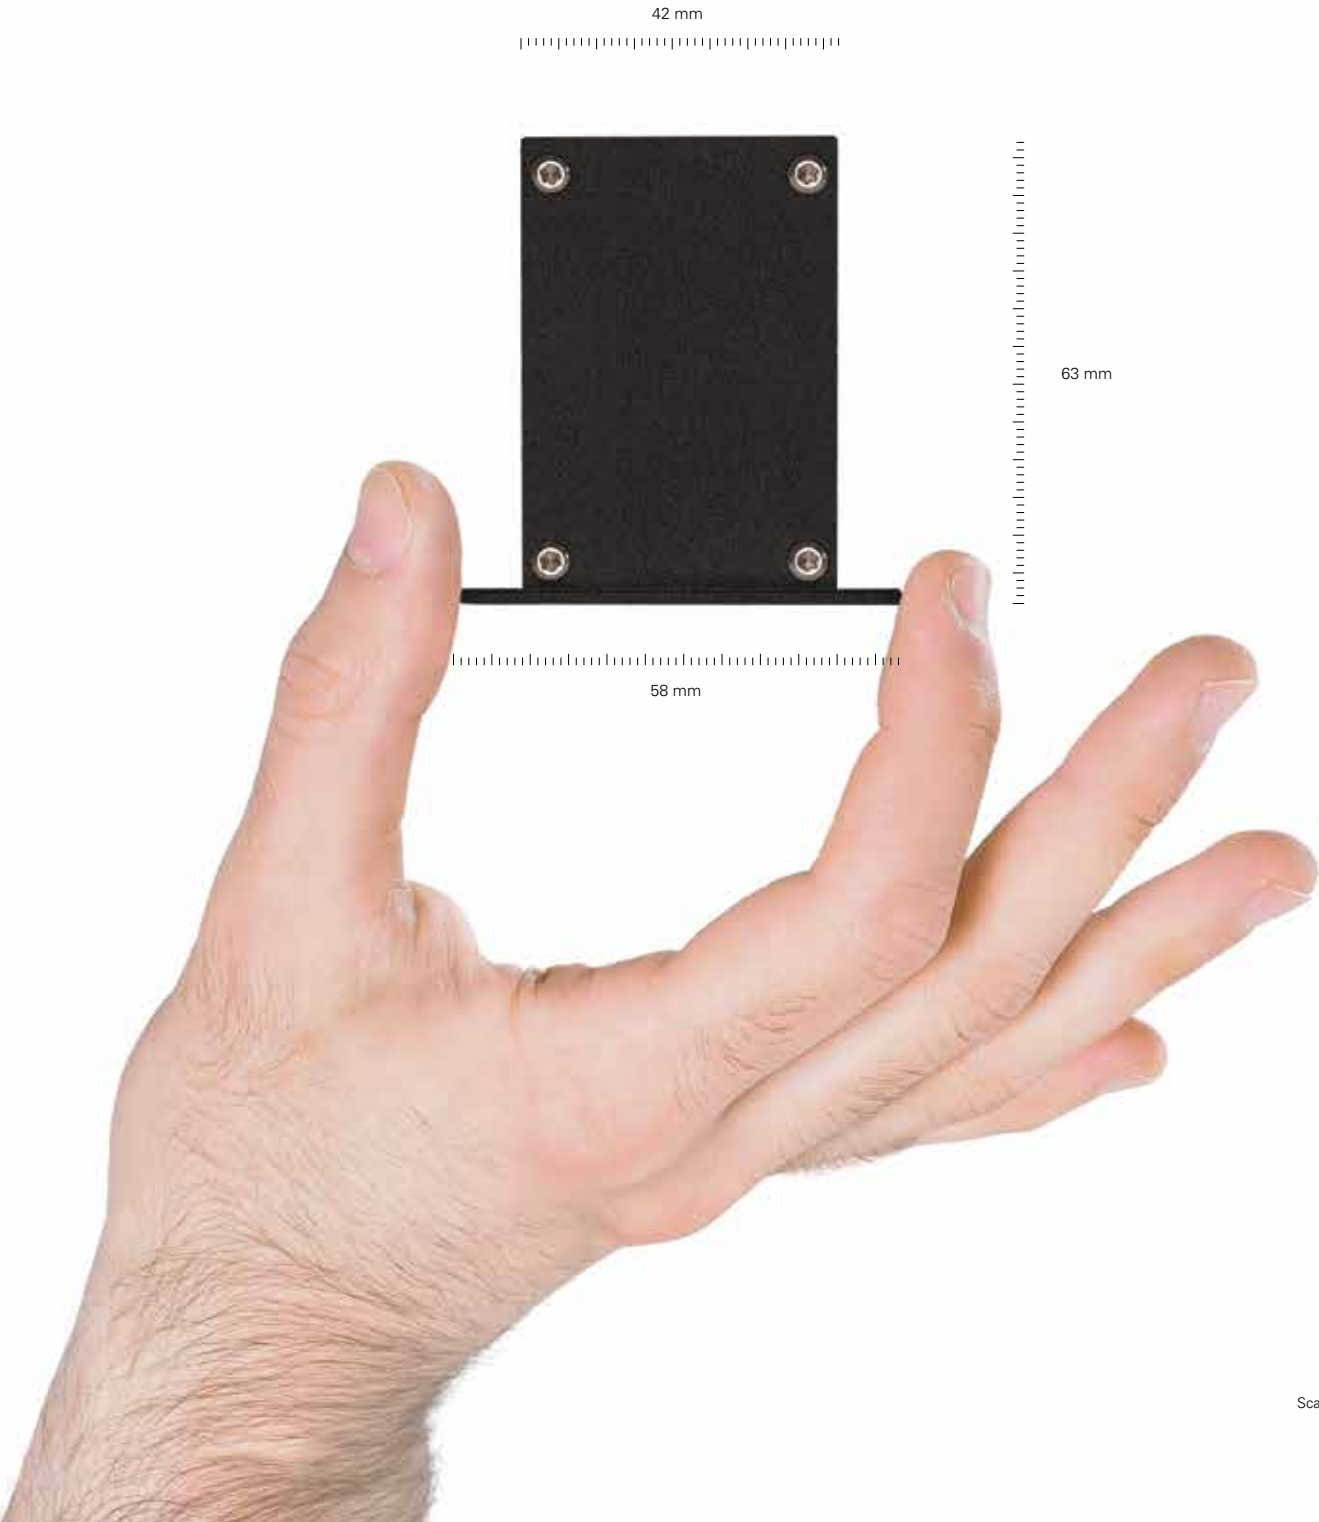


Create yourself!




Configurator

Discover our configurator
for the CONCEPT 35
range and create your
own lighting design in a
faster and smarter way!

configurator.indelagroup.com

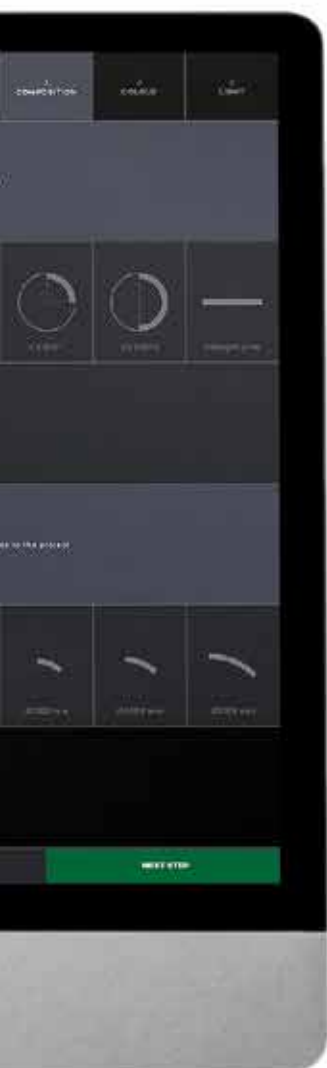

CONCEPT S 35 /E

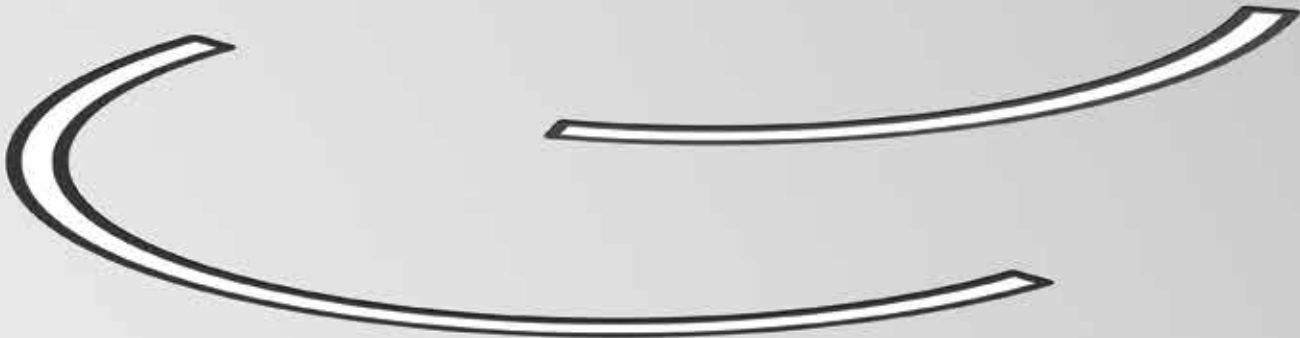


Product
characteristics

Body Aluminium
Finish Powder coated
Optical system bFLEX - Opal diffuser not included
Wiring Through-wiring included
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 70.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 1-25mm


CE	RoHS
230V/50Hz	
⏏	IP 40
bFLEX 960°C	⚡

01. Select module

CURVED MODULE




1/16 (22,5°) | bFLEX - Opal diffuser (Not included)




W	lm output	lm/W	Lmm	Dmm	CODE*
49	4539	93	1549	Ø7939	90710▲011▼▲0◆♣




1/8 (45°) | bFLEX - Opal diffuser (Not included)




W	lm output	lm/W	Lmm	Dmm	CODE*
24	2063	86	710	Ø1856	90711▲005▼▲0◆♣
32	2889	90	984	Ø2572	90711▲007▼▲0◆♣
36	3301	92	1121	Ø2929	90711▲008▼▲0◆♣
49	4539	93	1532	Ø4003	90711▲011▼▲0◆♣
68	6602	97	2217	Ø5792	90711▲016▼▲0◆♣




1/4 (90°) | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	Dmm	CODE*
28	2476	88	805	Ø1139	90712▲006▼▲0◆♣
36	3301	92	1059	Ø1497	90712▲008▼▲0◆♣
44	4127	94	1312	Ø1856	90712▲010▼▲0◆♣
61	5777	95	1818	Ø2572	90712▲014▼▲0◆♣
68	6602	97	2071	Ø2929	90712▲016▼▲0◆♣
90	9078	101	2831	Ø4003	90712▲022▼▲0◆♣



1/2 (180°) | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	Dmm	CODE*
36	3301	92	780	Ø780	90713▲008▼▲0◆♣
53	4952	93	1139	Ø1139	90713▲012▼▲0◆♣
68	6602	97	1497	Ø1497	90713▲016▼▲0◆♣
83	8253	99	1856	Ø1856	90713▲020▼▲0◆♣



*Replace the symbols to complete the code

Module direction ▲
LEFT L
RIGHT R


Control gear ▼
HF E
DALI H

Colour ¹ ◆
☐ White W
☐ Gray G
☒ Black B
☐ Sahara 0
☐ Mist 1
☐ Carbon I
☐ Autumn L
☐ Rusty chain R
☐ Jungle N
☐ Golden eye D
☐ Old rose 5
☐ Copper 7


Colour temp. ◆
3000K 3
4000K 0

Module ◆
SRT 49
MID/END 98

LINEAR MODULE



LINEA | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	CODE*
28	2476	88	843	90709L006▼▲0◆♣
36	3301	92	1124	90709L008▼▲0◆♣
44	4127	94	1405	90709L010▼▲0◆♣
53	4952	93	1686	90709L012▼▲0◆♣
61	5777	95	1967	90709L014▼▲0◆♣
68	6602	97	2248	90709L016▼▲0◆♣
76	7428	98	2529	90709L018▼▲0◆♣
83	8253	99	2810	90709L020▼▲0◆♣

CURVED MODULE | LINEAR MODULE

- To complete the individual product add bFLEX diffuser and start kit. Please order separately.
- To complete the line add bFLEX diffuser, start kit and body connector. Please order separately.
- Dimensions do not include the start kit. Add 6 mm to the recessing length to complete the line.
- To obtain the cutting dimensions, see the instruction manual attached to the product or on our website.

¹ See page 84.

02. Select
options

OPTIONS	Code*
BFLEX diffuser	
L5000 mm	985705
L15000 mm	985715
L30000 mm	985730
SwitchDIM	
• Under request.	
Start kit - end cap start/end	
• Two end caps and screws included.	923010♣
Body connector (x1)	
• Screws included.	932010
Body connector VRT 90° (x1)	
• Screws included.	932020
Steel safety cable	
L1500 mm	955000
Ceiling marking kit	
• Under request.	



*Replace the
symbols to complete
the code


Colour ¹	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7



Select
options



End cap



Ceiling recessed
application



Continuous diffuser



bFLEX diffuser



Diffuser detail



CONCEPT S 35



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser not included

Wiring

Through-wiring included

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40




01. Select module


CURVED MODULE




1/16 (22.5°) | bFLEX - Opal diffuser (Not included)



W	Im output	Im/W	Lmm	Dmm	CODE*
49	4539	93	1548	Ø7936	90543▲011▼▲0◆♣




1/8 (45°) | bFLEX - Opal diffuser (Not included)




W	Im output	Im/W	Lmm	Dmm	CODE*
24	2063	86	709	Ø1853	90544▲005▼▲0◆♣
32	2889	90	983	Ø2569	90544▲007▼▲0◆♣
36	3301	92	1120	Ø2926	90544▲008▼▲0◆♣
49	4539	93	1531	Ø4000	90544▲011▼▲0◆♣
68	6602	97	2215	Ø5789	90544▲016▼▲0◆♣




1/4 (90°) | bFLEX - Opal diffuser (Not included)



W	Im output	Im/W	Lmm	Dmm	CODE*
28	2476	88	803	Ø1136	90545▲006▼▲0◆♣
36	3301	92	1057	Ø1494	90545▲008▼▲0◆♣
44	4127	94	1310	Ø1853	90545▲010▼▲0◆♣
61	5777	95	1816	Ø2569	90545▲014▼▲0◆♣
68	6602	97	2069	Ø2926	90545▲016▼▲0◆♣
90	9078	101	2828	Ø4000	90545▲022▼▲0◆♣




1/2 (180°) | bFLEX - Opal diffuser (Not included)




W	Im output	Im/W	Lmm	Dmm	CODE*
36	3301	92	777	Ø777	90546▲008▼▲0◆♣
53	4952	93	1136	Ø1136	90546▲012▼▲0◆♣
68	6602	97	1494	Ø1494	90546▲016▼▲0◆♣
83	8253	99	1853	Ø1853	90546▲020▼▲0◆♣

LINEAR MODULE



LINEA | bFLEX - Opal diffuser (Not included)



W	Im output	Im/W	Lmm	CODE*
28	2476	88	843	90541L006▼▲0◆♣
36	3301	92	1124	90541L008▼▲0◆♣
44	4127	94	1405	90541L010▼▲0◆♣
53	4952	93	1686	90541L012▼▲0◆♣
61	5777	95	1967	90541L014▼▲0◆♣
68	6602	97	2248	90541L016▼▲0◆♣
76	7428	98	2529	90541L018▼▲0◆♣
83	8253	99	2810	90541L020▼▲0◆♣

CURVED MODULE | LINEAR MODULE

- To complete the individual product add bFLEX diffuser and start kit. Please order separately.
- To complete the line add bFLEX diffuser, start kit and body connector kit. Please order separately.
- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- Dimensions do not include the start kit. Add 26 mm to the recessing length to complete the line.
- Create your own configurations on CONFIGURATOR.INDELAGEGROUP.COM.



*Replace the symbols to complete the code

Module direction ▲
LEFT L
RIGHT R

Control gear ▼
HF E
DALI H

Colour ¹ ◆
☐ White W
☐ Gray G
☒ Black B
☐ Sahara 0
☐ Mist 1
☐ Carbon I
☐ Autumn L
☐ Rusty chain R
☐ Jungle N
☐ Golden eye D
☐ Old rose 5
☐ Copper 7

Colour temp. ◆
3000K 3
4000K 0

Module ◆
SRT 49
MID/END 98

¹ See page 84.

02. Select options

OPTIONS	Code*
BFLEX diffuser	
L5000 mm	985705
L15000 mm	985715
L30000 mm	985730
SwitchDIM	
• Under request.	
Start kit - end cap start/end	
• 2 end caps included.	923000♣
	
Body connector (x1)	
• Screws included.	932000
Suspension	
• For all curved versions and linea versions of L1967, L2248, L2529, L2810 mm:	
S11 L1500 mm (x3)	9129031
S11 L3000 mm (x3)	9129032
S11 L6000 mm (x3)	9129033
• For Linea versions of L843, L1124, L1405, L1686 mm:	
S11 L1500 mm (x2)	9129021
S11 L3000 mm (x2)	9129022
S11 L6000 mm (x2)	9129023
Transparent current supply cable	
L1500 mm - 3 x 1,5 mm ²	940300
L1500 mm - 5 x 1,5 mm ²	940000
L3000 mm - 3 x 1,5 mm ²	940301
L3000 mm - 5 x 1,5 mm ²	940001
L6000 mm - 3 x 1,5 mm ²	940302
L6000 mm - 5 x 1,5 mm ²	940002
Round ceiling rose ¹	
Surface mounted T24 D95 45  Ø95	978600♣
Recessed T5 D90  Ø70 33  Ø90	971300♣
Ceiling marking kit	
• Under request.	




*Replace the symbols to complete the code

Colour ¹²	
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7



Select options

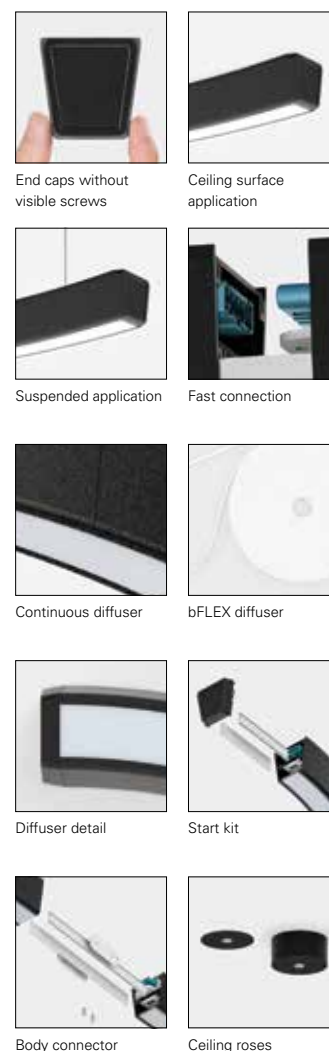

¹ The ceiling roses are only available in White or Black colour.

² See page 84.



CONCEPT S 35 D/I



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser not included

Wiring

Through-wiring included

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40




01. Select module


CURVED MODULE




1/16 (22,5°) | bFLEX - Opal diffuser (Not included) (80%/20%)



W	lm output	lm/W	Lmm	Dmm	CODE*
61	5777	95	1548	Ø7936	90547▲011▼▲0◆♣




1/8 (45°) | bFLEX - Opal diffuser (Not included) (80%/20%)




W	lm output	lm/W	Lmm	Dmm	CODE*
44	4127	94	1120	Ø2926	90548▲008▼▲0◆♣
61	5777	95	1531	Ø4000	90548▲011▼▲0◆♣
83	8253	99	2215	Ø5789	90548▲016▼▲0◆♣




1/4 (90°) | bFLEX - Opal diffuser (Not included) (80%/20%)



W	lm output	lm/W	Lmm	Dmm	CODE*
44	4127	94	1057	Ø1494	90549▲008▼▲0◆♣
57	5364	94	1310	Ø1853	90549▲010▼▲0◆♣
76	7428	98	1816	Ø2568	90549▲014▼▲0◆♣
83	8253	99	2069	Ø2926	90549▲016▼▲0◆♣
122	11554	95	2828	Ø4000	90549▲022▼▲0◆♣




1/2 (180°) | bFLEX - Opal diffuser (Not included) (80%/20%)




W	lm output	lm/W	Lmm	Dmm	CODE*
44	4127	94	777	Ø777	90550▲008▼▲0◆♣
64	6190	97	1136	Ø1136	90550▲012▼▲0◆♣
83	8253	99	1494	Ø1494	90550▲016▼▲0◆♣
110	10316	94	1853	Ø1853	90550▲020▼▲0◆♣

LINEAR MODULE



LINEA | bFLEX - Opal diffuser (Not included) (80%/20%)



W	lm output	lm/W	Lmm	CODE*
44	4127	94	1124	90542L008▼▲0◆♣
57	5364	94	1405	90542L010▼▲0◆♣
64	6190	97	1686	90542L012▼▲0◆♣
76	7428	98	1967	90542L014▼▲0◆♣
83	8253	99	2248	90542L016▼▲0◆♣
94	9491	101	2529	90542L018▼▲0◆♣
110	10316	94	2810	90542L020▼▲0◆♣

CURVED MODULE | LINEAR MODULE

- To complete the individual product add bFLEX diffuser, start kit, current supply cable, suspension and ceiling rose. Please order separately.
- To complete the line add bFLEX diffuser, current supply cable, suspensions, start kit and body connector kit. Please order separately.
- Dimensions do not include the start kit. Add 26 mm to the recessing length to complete the line.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.
- Create your own configurations on CONFIGURATOR.INDELAGUEGROUP.COM.



*Replace the symbols to complete the code

Module direction ▲
LEFT L
RIGHT R

Control gear ▼
HF E
DALI H

Colour ¹ ◆
☐ White W
☐ Gray G
☒ Black B
☐ Sahara 0
☐ Mist 1
☐ Carbon I
☐ Autumn L
☐ Rusty chain R
☐ Jungle N
☐ Golden eye D
☐ Old rose 5
☐ Copper 7

Colour temp. ◆
3000K 3
4000K 0

Module ◆
SRT 49
MID/END 98

02. Select options

OPTIONS	Code*
BFLEX diffuser	
L5000 mm	985705
L15000 mm	985715
L30000 mm	985730
SwitchDIM	
• Under request.	
Start kit - end cap start/end	
• 2 end caps included.	55 923000♣ 56 13 35
Body connector (x1)	
• Screws included.	932000
Suspension	
• For all curved versions and linea versions of L1967, L2248, L2529, L2810 mm:	
S11 L1500 mm (x3)	9129031
S11 L3000 mm (x3)	9129032
S11 L6000 mm (x3)	9129033
• For Linea versions of L843, L1124, L1405, L1686 mm:	
S11 L1500 mm (x2)	9129021
S11 L3000 mm (x2)	9129022
S11 L6000 mm (x2)	9129023
Transparent current supply cable	
L1500 mm - 3 x 1,5 mm ²	940300
L1500 mm - 5 x 1,5 mm ²	940000
L3000 mm - 3 x 1,5 mm ²	940301
L3000 mm - 5 x 1,5 mm ²	940001
L6000 mm - 3 x 1,5 mm ²	940302
L6000 mm - 5 x 1,5 mm ²	940002
Round ceiling rose¹	
Surface mounted T24 D95 45  Ø95	978600♣
Recessed T5 D90  Ø70 33  Ø90	971300♣
Ceiling marking kit	
• Under request.	



*Replace the symbols to complete the code

Colour ^{1 2}	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7



Select options



End caps without visible screws



Suspended application



Fast connection



Continuous diffuser



Indirect light



bFLEX diffuser




Diffuser detail



Start kit



Body connector




Ceiling roses

¹ The ceiling roses are only available in White or Black colour.


² See page 84.



Structural elements composition

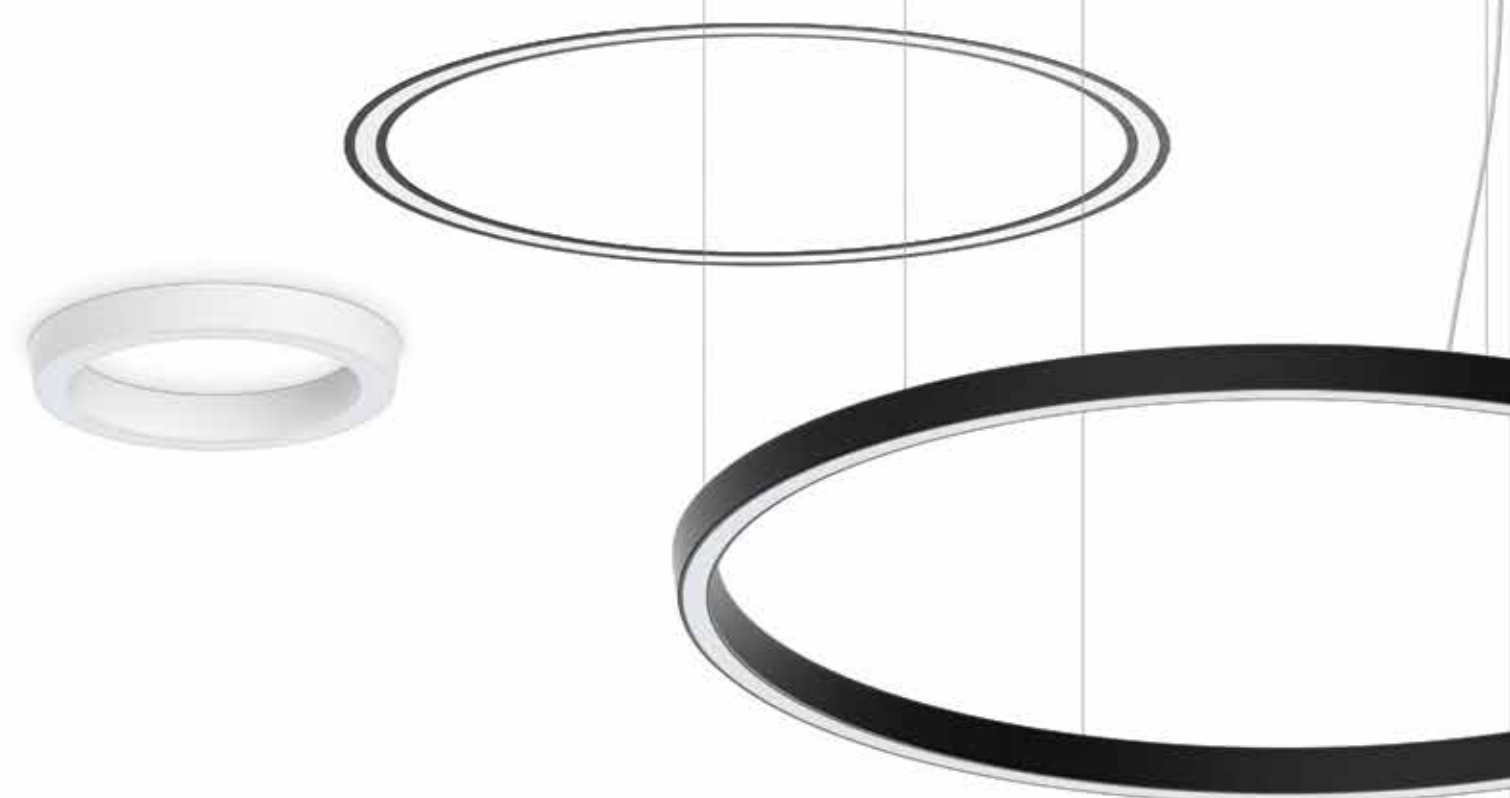

Available modules

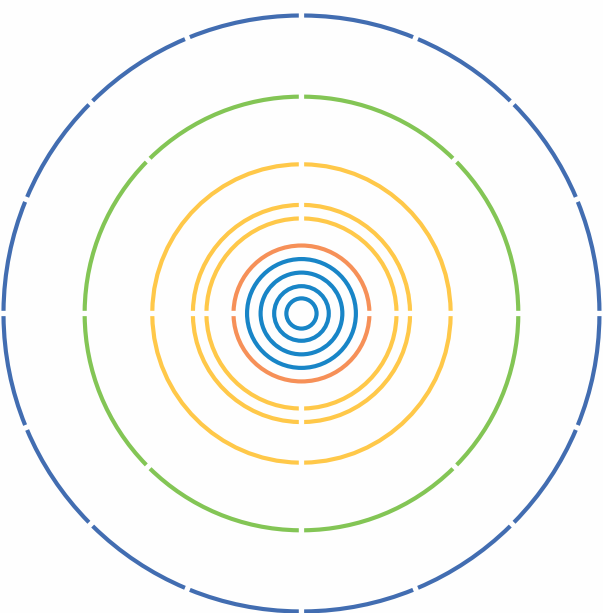


Scale 1:100 1000 mm

SINGULAR (single module)



COMPOSED (multiple modules)



	NUMBER OF MODULES	MODULAR VERSION	NUMBER OF SUSPENSIONS
Diameter			
≈Ø455 mm	1	1/1 (360°)	3
≈Ø777 mm	1	1/1 (360°)	3
≈Ø1136 mm	1	1/1 (360°)	4
≈Ø1494 mm	1	1/1 (360°)	6
≈Ø1853 mm	2	1/2 (180°)	6
≈Ø2569 mm	4	1/4 (90°)	8
≈Ø2926 mm	4	1/4 (90°)	12
≈Ø4000 mm	4	1/4 (90°)	12
≈Ø5789 mm	8	1/8 (45°)	24
≈Ø7936 mm	16	1/16 (22,5°)	32

Acoustic version

ARCHITECTURAL
LIGHTING



1. Acoustic moss

The acoustic moss can transform the ambience of your space.

It has excellent acoustic and humidity control properties, helping to reduce noise and improve the working environment.



2. Acoustic panel

The acoustic panel has excellent sound absorption, increasing the comfort and well-being of those who work or live in the spaces.

Available in a variety of colours, perfect to match any environment.



CONCEPT O 35 /E




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system bFLEX - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 70.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 1-25mm


CE	RoHS
230V/50Hz	
⏏	IP 40
bFLEX 960°C	⚡

01. Select version

CONCEPT O 35 / E



bFLEX - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
36	3296	92	Ø458	90708L012▼▲0◆00
68	6602	97	Ø780	90708L016▼▲0◆00
97	9904	102	Ø1139	90708L024▼▲0◆00
136	13205	97	Ø1497	90708L032▼▲0◆00
166	16506	99	Ø1856	90708L040▼▲0◆00
244	23108	95	Ø2572	90708L056▼▲0◆00
272	26410	97	Ø2929	90708L064▼▲0◆00
360	36313	101	Ø4003	90708L088▼▲0◆00
544	52819	97	Ø5792	90708L128▼▲0◆00
784	72626	93	Ø7939	90708L176▼▲0◆00

CONCEPT O 35 / E

- For all diameters above Ø1497 mm the product is composed by multiple modules.
- To obtain the cutting dimensions, see the instruction manual attached to the product or on our website.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
3000K	3
4000K	0

02. Select options



Select options

OPTIONS Code

SwitchDIM

- Under request.

Steel safety cable

L1500 mm 955000



bFLEX diffuser

¹ See page 84.

CONCEPT O 35




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system bFLEX - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 70.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏚	IP 40
bFLEX 960°C	

01. Select version

CONCEPT O 35



bFLEX - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
36	3296	92	Ø455	90539L012♥♣0♦00
68	6602	97	Ø777	90539L016♥♣0♦00
97	9904	102	Ø1136	90539L024♥♣0♦00
136	13205	97	Ø1494	90539L032♥♣0♦00
166	16506	99	Ø1853	90539L040♥♣0♦00
244	23108	95	Ø2569	90539L056♥♣0♦00
272	26410	97	Ø2926	90539L064♥♣0♦00
360	36313	101	Ø4000	90539L088♥♣0♦00
544	52819	97	Ø5789	90539L128♥♣0♦00
784	72626	93	Ø7936	90539L176♥♣0♦00

CONCEPT O 35

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- For all diameters above Ø1494 mm the product is composed by multiple modules.
- Create your own configurations on CONFIGURATOR.INDELAGUEGROUP.COM.



*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Colour ¹	♠
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	♦
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS	Code*
SwitchDIM	
• Under request.	
Suspension	
S11 (x3) - Ø455, Ø777 mm	912903▲
S11 (x4) - Ø1136 mm	912904▲
S11 (x6) - Ø1494, Ø1853 mm	912906▲
S11 (x8) - Ø2569 mm	912908▲
S11 (x12) - Ø2926, Ø4000 mm	912912▲
S11 (x24) - Ø5789 mm	912924▲
S11 (x32) - Ø7936 mm	912932▲
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
Round ceiling rose	
Surface mounted T24 D95 45 l  Ø95	978600▲
Recessed T5 D90  Ø70 33 l  Ø90	971300▲
Central ceiling rose	
Surface mounted T20 3l - Ø455, Ø777 mm	977201▲
Surface mounted T20 4l - Ø1136 mm	977202▲
Surface mounted T20 6l - Ø1494 mm 45 l  Ø95	977204▲
Acoustic moss	
Ø455 mm	926800
Ø777 mm	926801
Ø1136 mm	926802
• Sound absorption and humidity control.	
• Other diameters available under request.	
Acoustic panel	
Ø455 mm	926900
Ø777 mm	926901
Ø1136 mm	926902
• Sound absorption.	
• Other diameters available under request.	



*Replace the symbols to complete the code

Length	▲
L1500 mm	1
L3000 mm	2
L6000 mm	3

Colour	▲
☐ White	W
☒ Black	B



Select options



bFLEX diffuser



Ceiling roses



Acoustic panel



Acoustic panel (macro)



Acoustic panel



Acoustic panel (macro)



CONCEPT O 35 D/I



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40




01. Select version

CONCEPT O 35 D/I



bFLEX - Opal diffuser (80%/20%)



W	lm output	lm/W	Dmm	CODE*
83	8253	99	Ø777	90540L016▼▲◆00
128	12380	97	Ø1136	90540L024▼▲◆00
166	16506	99	Ø1494	90540L032▼▲◆00
220	20633	94	Ø1853	90540L040▼▲◆00
304	29711	98	Ø2569	90540L056▼▲◆00
332	33012	99	Ø2926	90540L064▼▲◆00
488	46217	95	Ø4000	90540L088▼▲◆00
664	66024	99	Ø5789	90540L128▼▲◆00
976	92434	95	Ø7936	90540L176▼▲◆00

CONCEPT O 35 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- For all diameters above Ø1494 mm the product is composed by multiple modules.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.
- Create your own configurations on CONFIGURATOR.INDELAGUEGROUP.COM.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS	Code*
SwitchDIM	
• Under request.	
Suspension	
S11 (x3) - Ø777 mm	912903▲
S11 (x4) - Ø1136 mm	912904▲
S11 (x6) - Ø1494, Ø1853 mm	912906▲
S11 (x8) - Ø2569 mm	912908▲
S11 (x12) - Ø2926, Ø4000 mm	912912▲
S11 (x24) - Ø5789 mm	912924▲
S11 (x32) - Ø7936 mm	912932▲
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
Round ceiling rose	
Surface mounted T24 D95 45 l  Ø95	978600▲
Recessed T5 D90  Ø70 33 l  Ø90	971300▲
Central ceiling rose	
Surface mounted T20 3l - Ø777 mm	977201▲
Surface mounted T20 4l - Ø1136 mm	977202▲
Surface mounted T20 6l - Ø1494 mm 45 l  Ø95	977204▲
Acoustic moss	
Ø777 mm	926801
Ø1136 mm	926802
• Sound absorption and humidity control. • Other diameters available under request.	
Acoustic panel	
Ø777 mm	926901
Ø1136 mm	926902
• Sound absorption. • Other diameters available under request.	



*Replace the symbols to complete the code

Length	▲
L1500 mm	1
L3000 mm	2
L6000 mm	3

Colour	▲
☐ White	W
☒ Black	B




Select options



Indirect light



bFLEX diffuser



Acoustic moss



Acoustic moss (macro)



Acoustic panel



Acoustic panel (macro)



Ceiling roses



CONCEPT Sq 35



Product
characteristics


Body Aluminium	
Finish Powder coated	
Optical system bFLEX - Opal diffuser	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 70.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 40
bFLEX 960°C	


01. Select version



CONCEPT Sq 35



bFLEX - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
112	10450	93	1126	90704L027▼▲0◆00
140	13752	98	1441	90704L033▼▲0◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
3000K	3
4000K	0

CONCEPT Sq 35

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

¹ See page 84.

02. Select options

OPTIONS		Code*
SwitchDIM		
• Under request.		
Suspension		
S11 L1500 mm (x4)		9129041
S11 L3000 mm (x4)		9129042
S11 L6000 mm (x4)		9129043
Transparent current supply cable		
L1500 mm - 3 x 0,75 mm ²		940400
L1500 mm - 5 x 0,75 mm ²		940500
L3000 mm - 3 x 0,75 mm ²		940401
L3000 mm - 5 x 0,75 mm ²		940501
L6000 mm - 3 x 0,75 mm ²		940402
L6000 mm - 5 x 0,75 mm ²		940507
Round ceiling rose		
Surface mounted T24 D95	45 l 	Ø95 978600▲
Recessed T5 D90	 Ø70 33 l 	Ø90 971300▲
Central ceiling rose		
Surface mounted T20 4l	45 l 	Ø95 977202▲



*Replace the symbols to complete the code

Colour	▲
☐ White	W
☒ Black	B




Select options




bFLEX diffuser



Ceiling roses

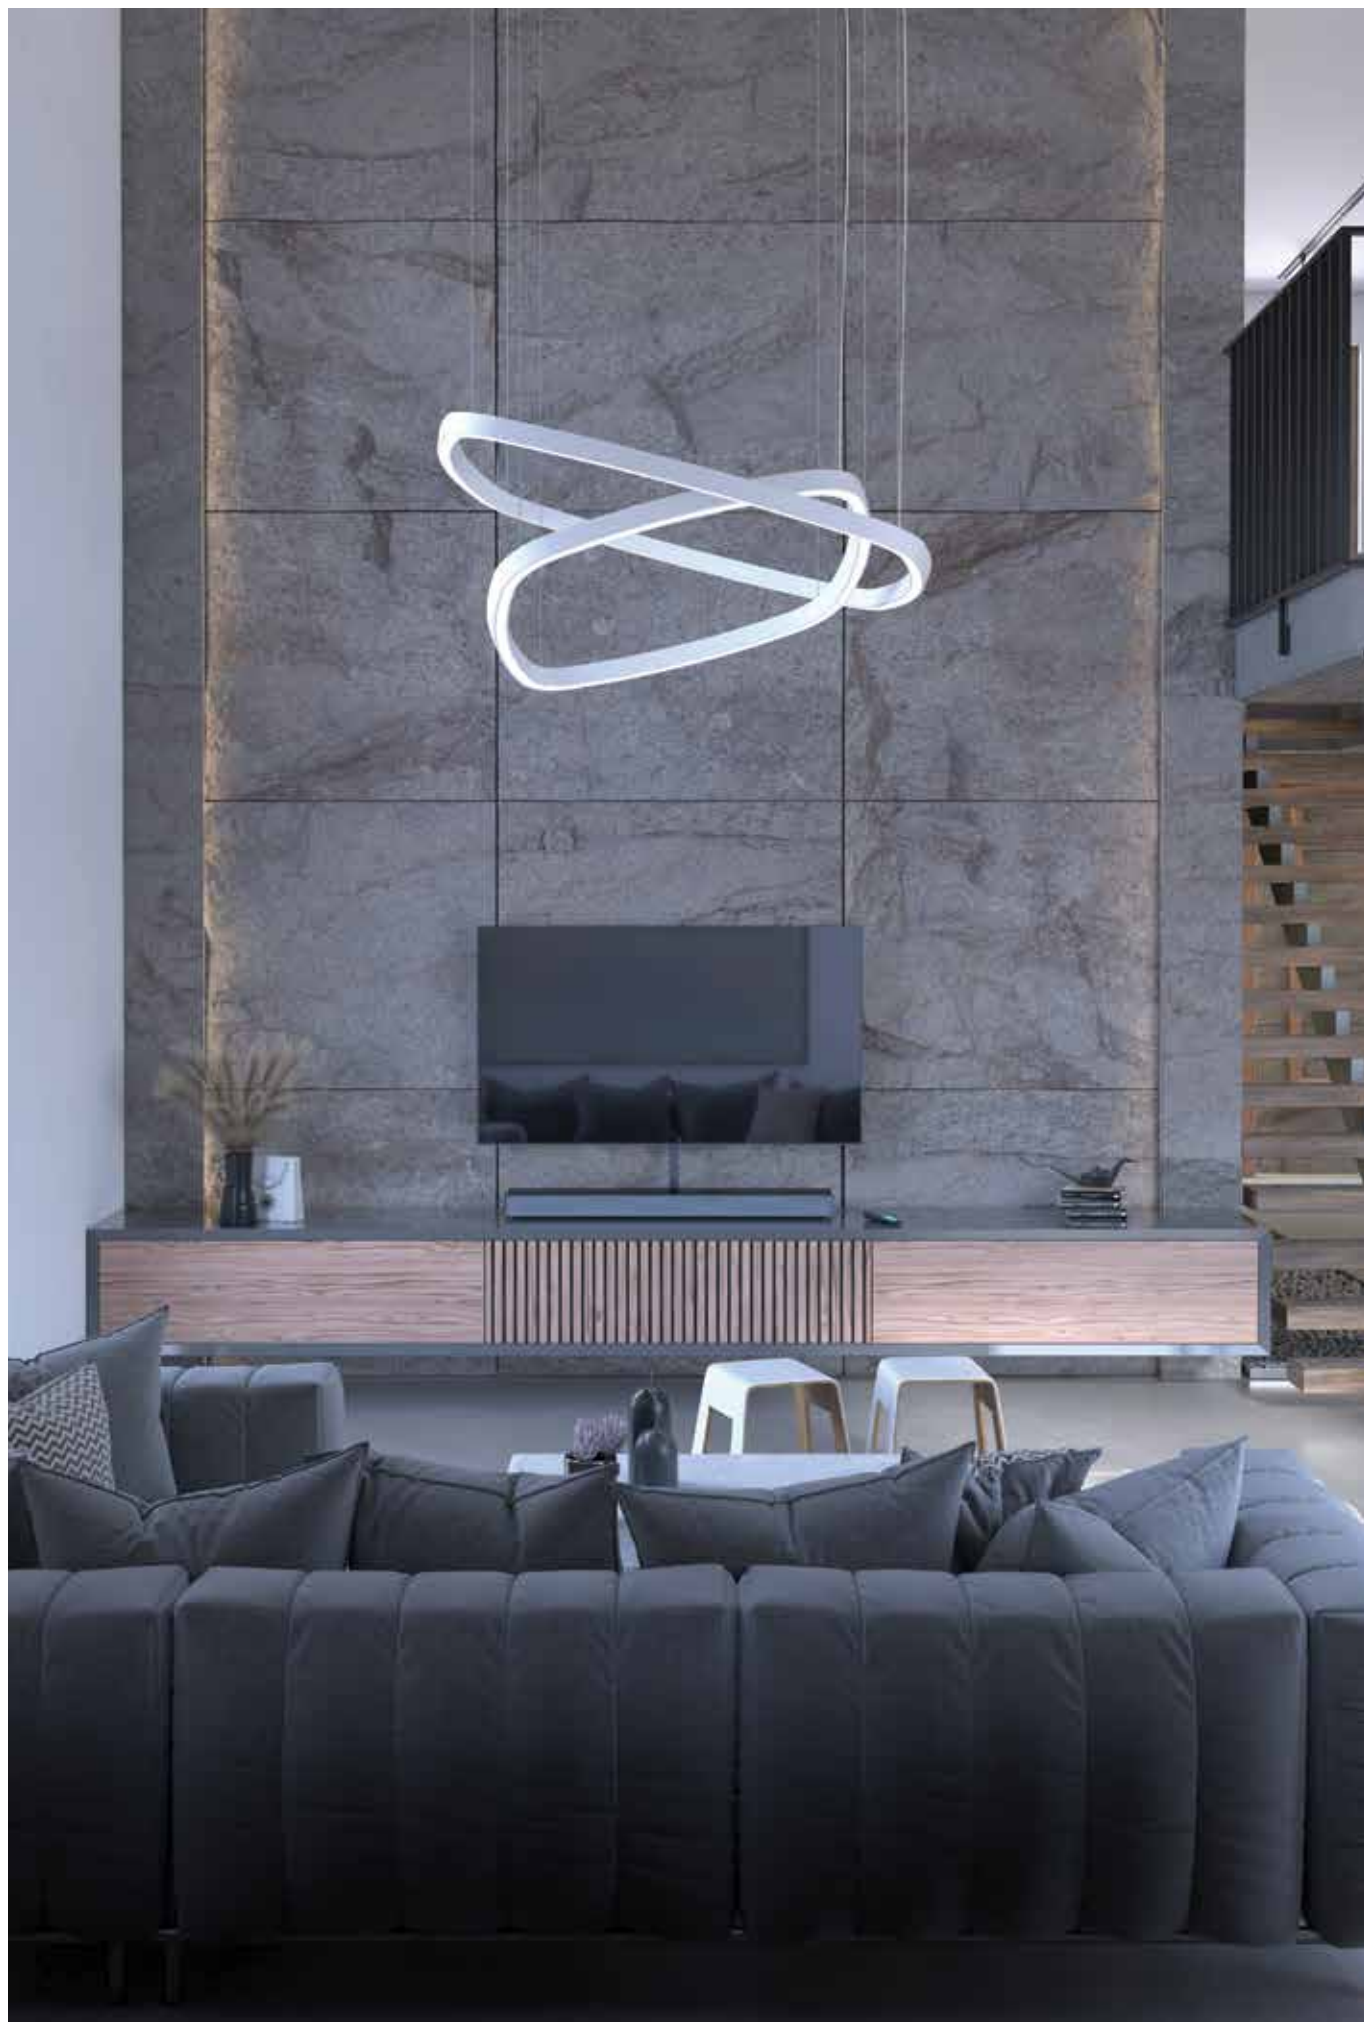

CONCEPT Sq 35 D/I

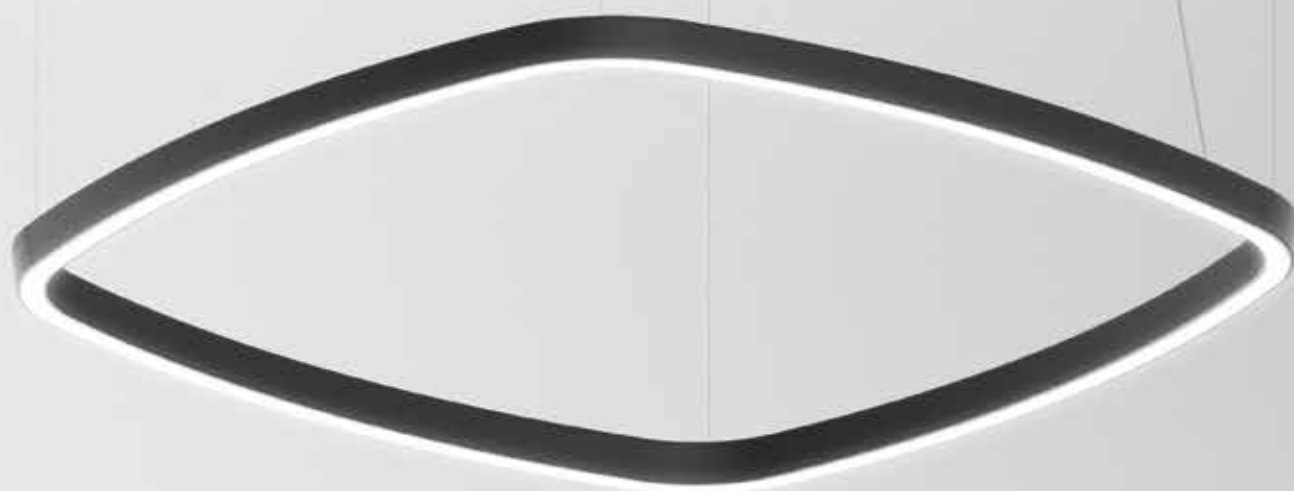

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40




01. Select version



CONCEPT Sq 35 D/I



bFLEX - Opal diffuser (80%/20%)



W	lm output	lm/W	Lmm	CODE*
140	13752	98	1126	90705L027♥♣0♦00
170	17053	100	1441	90705L033♥♣0♦00

CONCEPT Sq 35 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.

*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Colour ¹	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	♦
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS		Code*
SwitchDIM		
• Under request.		
Suspension		
S11 L1500 mm (x4)		9129041
S11 L3000 mm (x4)		9129042
S11 L6000 mm (x4)		9129043
Transparent current supply cable		
L1500 mm - 3 x 0,75 mm ²		940400
L1500 mm - 5 x 0,75 mm ²		940500
L3000 mm - 3 x 0,75 mm ²		940401
L3000 mm - 5 x 0,75 mm ²		940501
L6000 mm - 3 x 0,75 mm ²		940402
L6000 mm - 5 x 0,75 mm ²		940507
Round ceiling rose		
Surface mounted T24 D95	45 l 	Ø95 978600▲
Recessed T5 D90	 Ø70 33 l 	Ø90 971300▲
Central ceiling rose		
Surface mounted T20 4l	45 l 	Ø95 977202▲



*Replace the symbols to complete the code

Colour	▲
☐ White	W
☒ Black	B



Select options



Indirect light



bFLEX diffuser



Ceiling roses



CONCEPT D 35



Product characteristics


Body Aluminium
Finish Powder coated
Optical system bFLEX - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 70.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏏	IP 40
bFLEX 960°C	


01. Select version



CONCEPT D 35



bFLEX - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
108	9900	92	1187	90706L027▼▲0◆00
135	12376	92	1465	90706L033▼▲0◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
White	W
Gray	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Colour temp.	◆
3000K	3
4000K	0

CONCEPT D 35

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

¹ See page 84.

02. Select options

OPTIONS		Code*
SwitchDIM		
• Under request.		
Suspension		
S11 L1500 mm (x3)		9129031
S11 L3000 mm (x3)		9129032
S11 L6000 mm (x3)		9129033
Transparent current supply cable		
L1500 mm - 3 x 0,75 mm ²		940400
L1500 mm - 5 x 0,75 mm ²		940500
L3000 mm - 3 x 0,75 mm ²		940401
L3000 mm - 5 x 0,75 mm ²		940501
L6000 mm - 3 x 0,75 mm ²		940402
L6000 mm - 5 x 0,75 mm ²		940507
Round ceiling rose		
Surface mounted T24 D95	45 l 	Ø95 978600 
Recessed T5 D90	 Ø70 33 l 	Ø90 971300 
Central ceiling rose		
Surface mounted T20 3l	45 l 	Ø95 977201 



*Replace the symbols to complete the code

Colour	
☐ White	W
☒ Black	B



Select options




bFLEX diffuser



Ceiling roses



CONCEPT D 35 D/I

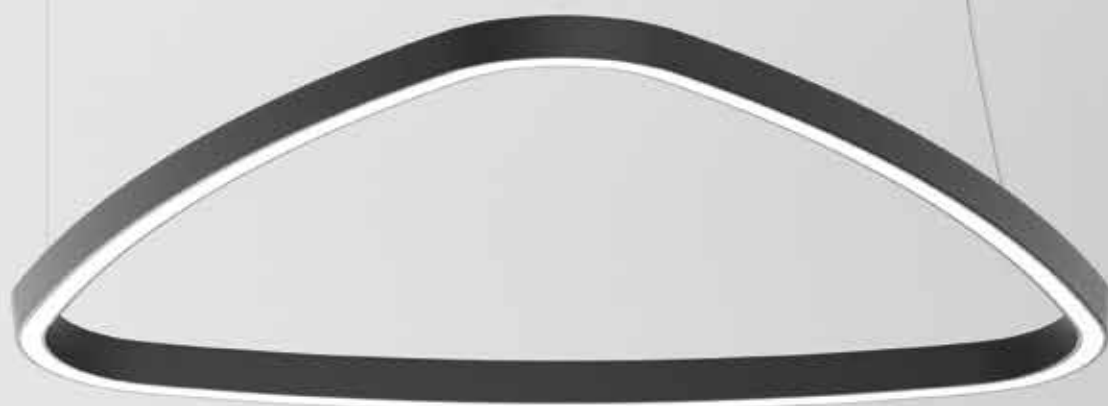

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40



01. Select version




CONCEPT D 35 D/I



bFLEX - Opal diffuser (80%/20%)

	W	lm output	lm/W	Lmm	CODE*
	135	12376	92	1187	90707L027♥♣0♦00
	171	16090	94	1465	90707L033♥♣0♦00



Co-C180
C80-C270

CONCEPT D 35 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.

*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Colour ¹	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	♦
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS		Code*
SwitchDIM		
• Under request.		
Suspension		
S11 L1500 mm (x3)		9129031
S11 L3000 mm (x3)		9129032
S11 L6000 mm (x3)		9129033
Transparent current supply cable		
L1500 mm - 3 x 0,75 mm ²		940400
L1500 mm - 5 x 0,75 mm ²		940500
L3000 mm - 3 x 0,75 mm ²		940401
L3000 mm - 5 x 0,75 mm ²		940501
L6000 mm - 3 x 0,75 mm ²		940402
L6000 mm - 5 x 0,75 mm ²		940507
Round ceiling rose		
Surface mounted T24 D95	45 l 	Ø95 978600♣
Recessed T5 D90	 Ø70 33 l 	Ø90 971300♣
Central ceiling rose		
Surface mounted T20 3l	45 l 	Ø95 977201♣



*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B



Select options



Indirect light



bFLEX diffuser



Ceiling roses

