



CONCEPT 65



CONCEPT S 65
138



CONCEPT S 65 D/I
142



CONCEPT O 65
146



CONCEPT O 65 D/I
150



Application types





1. Surface

2. Direct
suspension


3. Direct / indirect
suspension

4. Wall mounted






1. gCONTROL+







2. LIGHT+



Define your colour

ARCHITECTURAL
LIGHTING



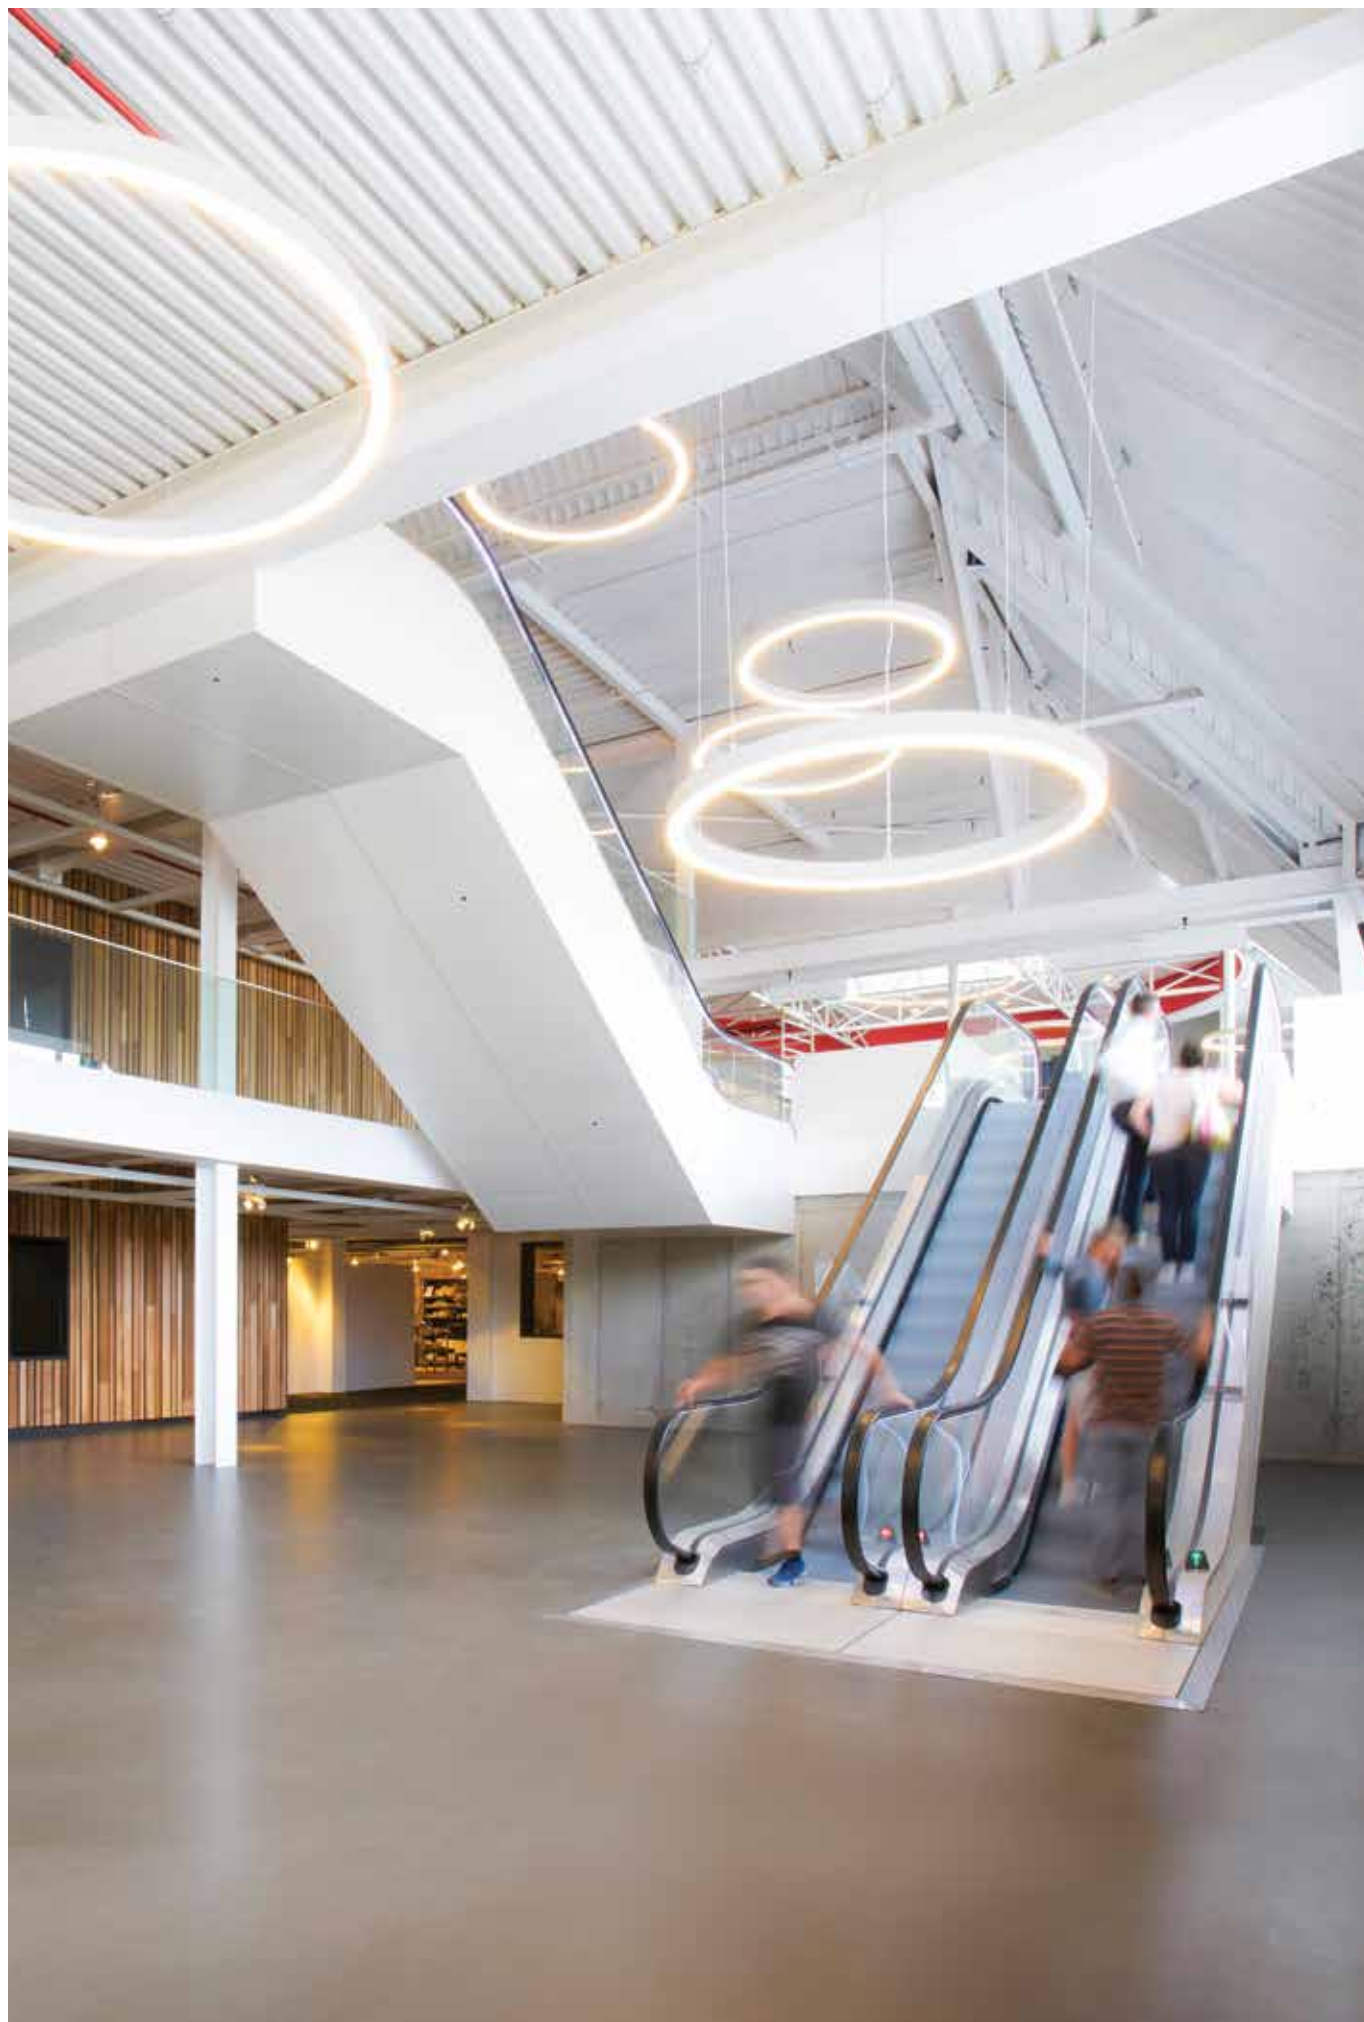

CONCEPT S 65




Product characteristics

Body
Aluminium
Finish
Powder coated
Optical system
LIGHT+ - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L80, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	

01. Select module


CURVED MODULE




1/16 (22,5°) | LIGHT+ - Opal diffuser




W	lm output	lm/W	Lmm	Dmm	CODE*
27	2776	103	1531	Ø7850	90781L010▼▲◆00




1/8 (45°) | LIGHT+ - Opal diffuser




W	lm output	lm/W	Lmm	Dmm	CODE*
15	1388	93	784	Ø2050	90782L005▼▲◆00
18	1666	93	937	Ø2450	90782L006▼▲◆00
20	1943	97	1071	Ø2800	90782L007▼▲◆00
22	2221	101	1224	Ø3200	90782L008▼▲◆00




1/4 (90°) | LIGHT+ - Opal diffuser



W	lm output	lm/W	Lmm	Dmm	CODE*
15	1388	93	742	Ø1050	90783L005▼▲◆00
18	1666	93	884	Ø1250	90783L006▼▲◆00
20	1943	97	1025	Ø1450	90783L007▼▲◆00
22	2221	101	1166	Ø1650	90783L008▼▲◆00
25	2498	100	1308	Ø1850	90783L009▼▲◆00
27	2776	103	1414	Ø2000	90783L010▼▲◆00
39	3886	100	1980	Ø2800	90783L014▼▲◆00
44	4441	101	2262	Ø3200	90783L016▼▲◆00
53	5552	105	2828	Ø4000	90783L020▼▲◆00




1/2 (180°) | LIGHT+ - Opal diffuser




W	lm output	lm/W	Lmm	Dmm	CODE*
22	2221	101	850	Ø850	90784L008▼▲◆00
27	2776	103	1050	Ø1050	90784L010▼▲◆00
33	3331	101	1250	Ø1250	90784L012▼▲◆00
39	3886	100	1450	Ø1450	90784L014▼▲◆00
44	4441	101	1650	Ø1650	90784L016▼▲◆00
48	4997	104	1850	Ø1850	90784L018▼▲◆00
53	5552	105	2000	Ø2000	90784L020▼▲◆00

LINEAR MODULE



LINEA | LIGHT+ - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
15	1388	93	750	90789L005▼▲◆00
20	1943	97	1050	90789L007▼▲◆00
25	2498	100	1350	90789L009▼▲◆00
30	3053	102	1650	90789L011▼▲◆00
36	3609	100	1950	90789L013▼▲◆00

CURVED MODULE | LINEAR MODULE

- To complete the line add start kit, through-wiring and body connector kit. Please order separately.
- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- Dimensions do not include the start kit. Add 4 mm to the recessing length to complete the line.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
3000K	3
4000K	0

02. Select options

OPTIONS	Code*
Start kit - end cap start/end • 2 end caps included.	65 921750♣ 85 1 2
Through-wiring 3 x 1,5 mm ² 5 x 1,5 mm ²	949200 949201
Body connector (x1) • Screws included.	931100♣
Suspension • For all curved versions:	
S1 L1500 mm (x3)	910005
S1 L3000 mm (x3)	910015
S1 L6000 mm (x3)	910016
• For all linear versions:	
S1 L1500 mm (x2)	910001
S1 L3000 mm (x2)	910011
S1 L6000 mm (x2)	910012
Transparent current supply cable L1500 mm - 3 x 1,5 mm ² L1500 mm - 5 x 1,5 mm ² L3000 mm - 3 x 1,5 mm ² L3000 mm - 5 x 1,5 mm ² L6000 mm - 3 x 1,5 mm ² L6000 mm - 5 x 1,5 mm ²	940300 940000 940301 940001 940302 940002
Round ceiling rose¹ Surface mounted T24 D95	45 1 2 Ø95 978600♣
Recessed T5 D90	33 1 2 Ø90 971300♣



*Replace the symbols to complete the code


Colour ¹²	
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7




Select options



LIGHT+ diffuser



Ceiling roses

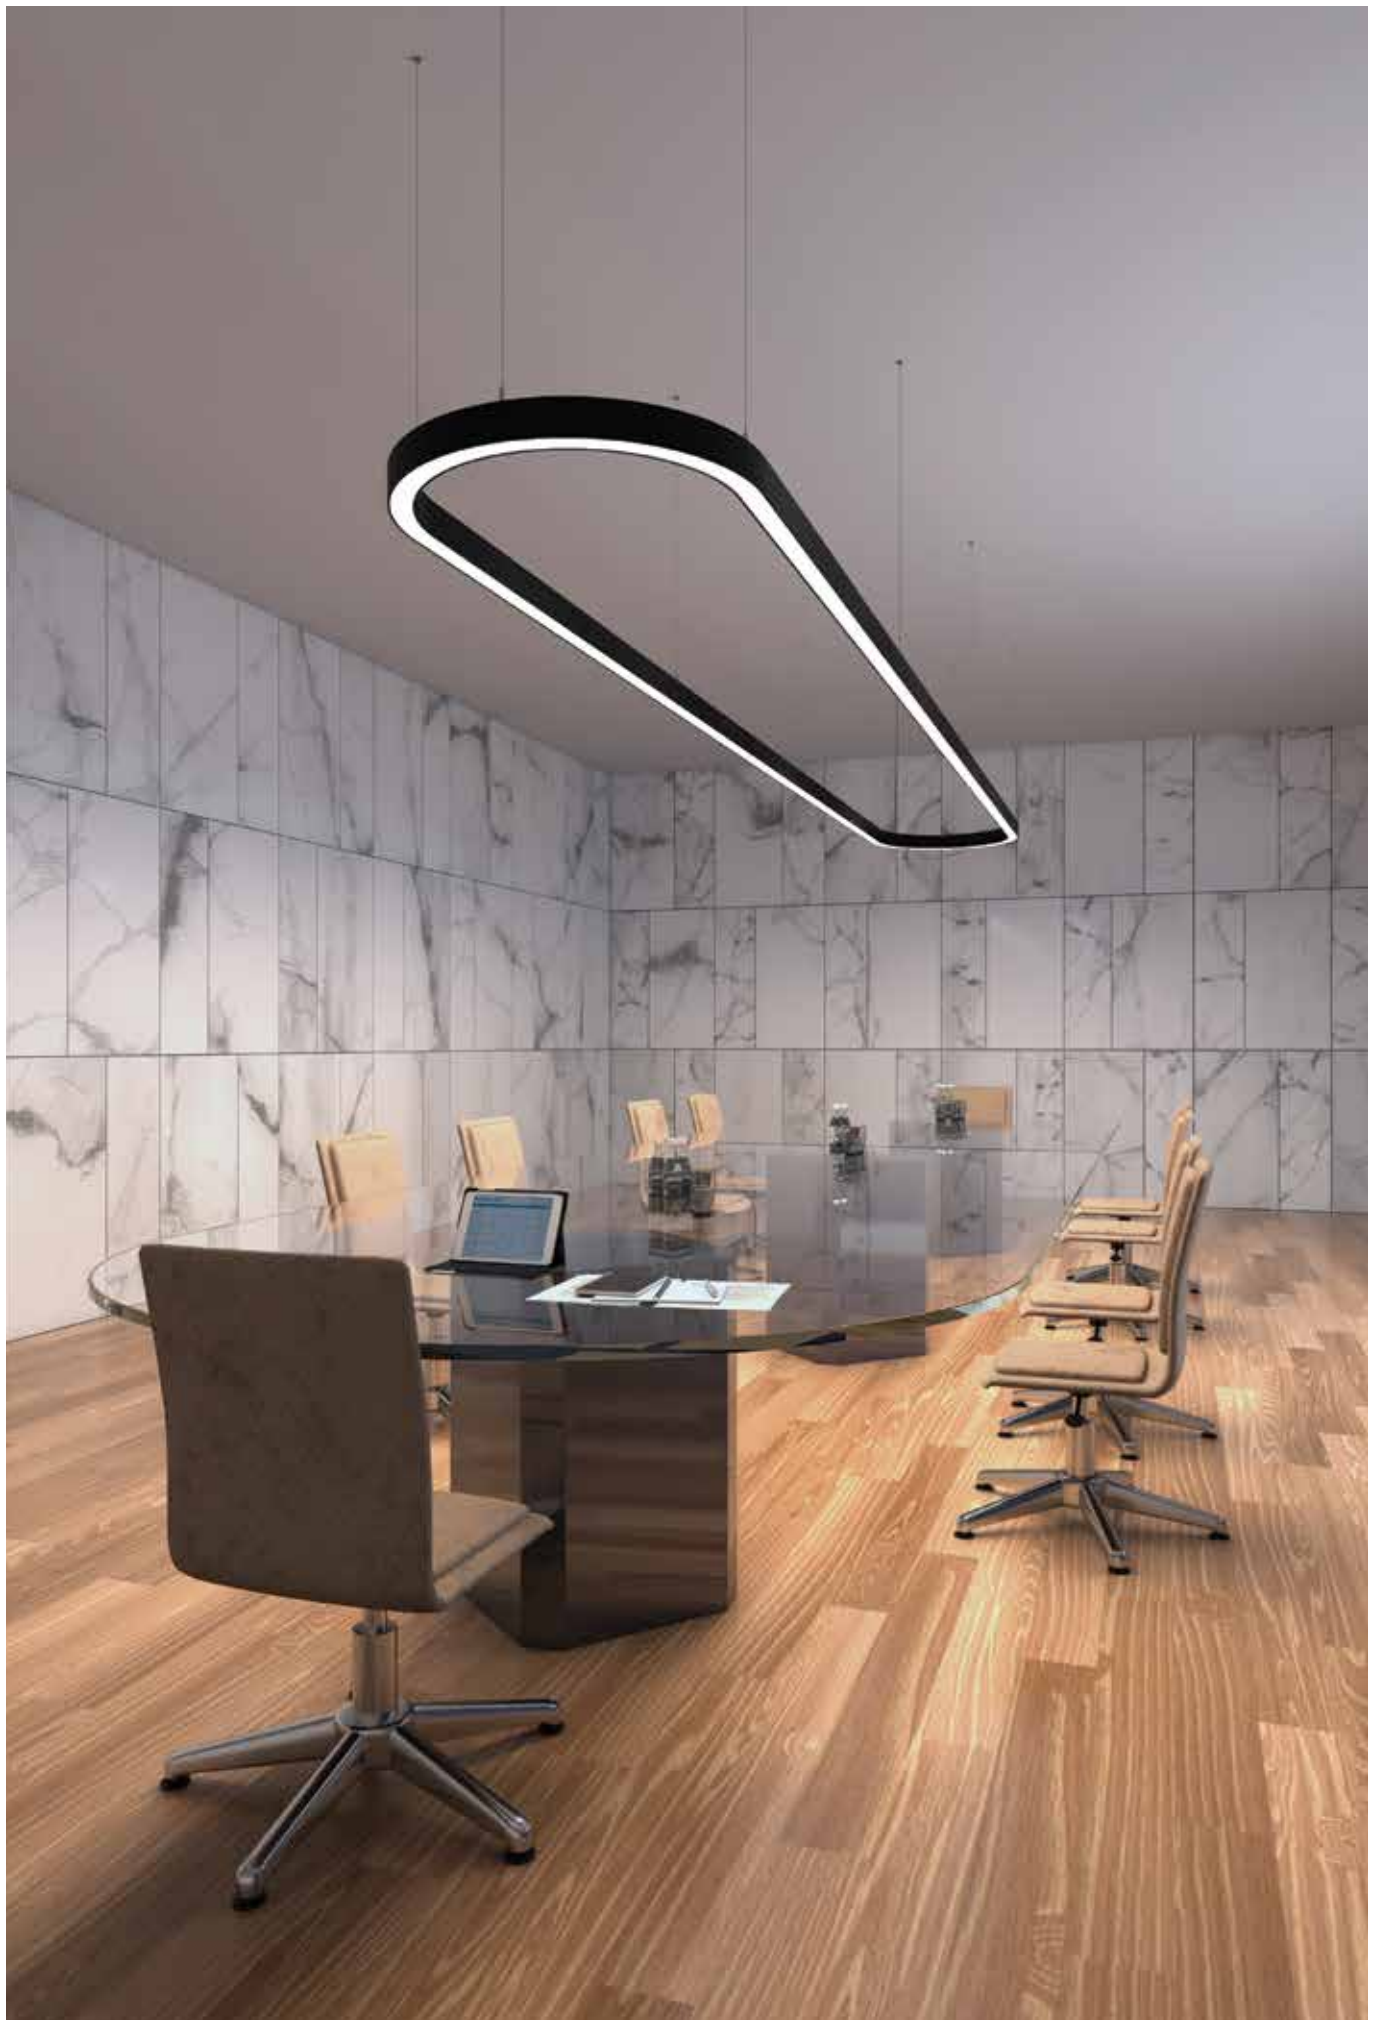

CONCEPT S 65 D/I




Product characteristics

Body Aluminium	
Finish Powder coated	
Optical system LIGHT+ - Opal diffuser	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 80.000h @ L80, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	


CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	

01. Select module


CURVED MODULE




1/16 (22,5°) | LIGHT+ - Opal diffuser (80%/20%)




W	lm output	lm/W	Lmm	Dmm	CODE*
33	3390	103	1531	Ø7850	90785L010♥♣0♦00




1/8 (45°) | LIGHT+ - Opal diffuser (80%/20%)




W	lm output	lm/W	Lmm	Dmm	CODE*
22	2260	103	1071	Ø2800	90786L007♥♣0♦00
25	2542	102	1224	Ø3200	90786L008♥♣0♦00




1/4 (90°) | LIGHT+ - Opal diffuser (80%/20%)



W	lm output	lm/W	Lmm	Dmm	CODE*
25	2542	102	1164	Ø1650	90787L008♥♣0♦00
30	3107	104	1305	Ø1850	90787L009♥♣0♦00
33	3390	103	1411	Ø2000	90787L010♥♣0♦00
47	4802	102	1977	Ø2800	90787L014♥♣0♦00
50	5367	107	2260	Ø3200	90787L016♥♣0♦00
63	6497	103	2826	Ø4000	90787L020♥♣0♦00




1/2 (180°) | LIGHT+ - Opal diffuser (80%/20%)




W	lm output	lm/W	Lmm	Dmm	CODE*
33	3390	103	1050	Ø1050	90788L010♥♣0♦00
39	3954	101	1250	Ø1250	90788L012♥♣0♦00
47	4802	102	1450	Ø1450	90788L014♥♣0♦00
50	5367	107	1650	Ø1650	90788L016♥♣0♦00
55	5932	108	1850	Ø1850	90788L018♥♣0♦00
63	6497	103	2000	Ø2000	90788L020♥♣0♦00

LINEAR MODULE



LINEA | LIGHT+ - Opal diffuser (80%/20%)



W	lm output	lm/W	Lmm	CODE*
30	3118	104	1350	90790L009♥♣0♦00
39	3976	102	1650	90790L011♥♣0♦00
44	4502	102	1950	90790L013♥♣0♦00



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	♦
3000K	3
4000K	0

CURVED MODULE | LINEAR MODULE

- To complete the individual product add current supply cable, suspension and start kit. Please order separately.
- To complete the line add start kit, through-wiring and body connector kit. Please order separately.
- Dimensions do not include start kit. To complete the line add 4 mm to the length.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.

¹ See page 136.

02. Select options

OPTIONS	Code*
Start kit - end cap start/end • 2 end caps included.	65 921750♣ 85 1 2
Through-wiring 3 x 1,5 mm ² 5 x 1,5 mm ²	949200 949201
Body connector (x1) • Screws included.	931100♣
Suspension • For all curved versions:	
S1 L1500 mm (x3)	910005
S1 L3000 mm (x3)	910015
S1 L6000 mm (x3)	910016
• For all linear versions:	
S1 L1500 mm (x2)	910001
S1 L3000 mm (x2)	910011
S1 L6000 mm (x2)	910012
Transparent current supply cable L1500 mm - 3 x 1,5 mm ² L1500 mm - 5 x 1,5 mm ² L3000 mm - 3 x 1,5 mm ² L3000 mm - 5 x 1,5 mm ² L6000 mm - 3 x 1,5 mm ² L6000 mm - 5 x 1,5 mm ²	940300 940000 940301 940001 940302 940002
Round ceiling rose¹ Surface mounted T24 D95	45 1 2 Ø95 978600♣
Recessed T5 D90	33 1 2 Ø90 971300♣



*Replace the symbols to complete the code

Colour ¹²	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7



Select options



LIGHT+ diffuser



Indirect light



Ceiling roses



CONCEPT O 65



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 20

650°C


01. Select version



CONCEPT O 65




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	38	3722	98	Ø600	90625L600♥♣♦00
≤19	54	5377	100	Ø900	90625L900♥♣♦♦00
≤19	77	7858	102	Ø1200	90625L120♥♣♦♦00
≤19	91	9099	100	Ø1500	90625L150♥♣♦♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	38	3993	105	Ø600	90635L600♥♣♦♦00
≤22	54	5768	107	Ø900	90635L900♥♣♦♦00
≤22	77	8430	109	Ø1200	90635L120♥♣♦♦00
≤22	91	9761	107	Ø1500	90635L150♥♣♦♦00

CONCEPT O 65

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	♠
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0

¹ See page 136.

² Prepared for emergency remote control.

02. Select options

OPTIONS	Code*
Bluetooth	927200
• Bluetooth wireless control via smartphone.	
Suspension	
S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the DALI option with emergency unit and remote control, add 2 current supply cables of 5 x 0,75 mm ² .	
Round ceiling rose	
Surface mounted T24 D95 45 l  Ø95	978600♣
Surface mounted T26 D95 (DALI+K3)	978601♣
Recessed T5 D90  Ø70 33 l  Ø90	971300♣
Recessed T27 D90 (DALI+K3)	978700♣
Central ceiling rose	
Surface T21 3l D95 45 l  Ø95	977211♣
Surface T28 3l D95 (DALI+K3)	977230♣




*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B



Select options

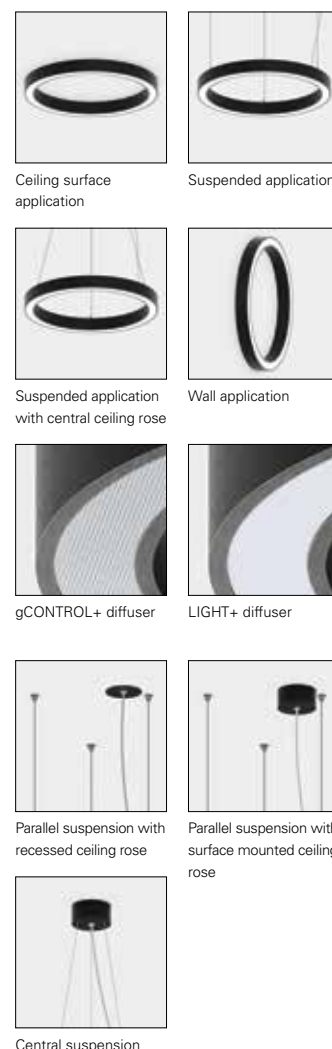



CONCEPT O 65 D/I



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 20


650°C

01. Select version

CONCEPT O 65 D/I




gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	44	4580	104	Ø600	90626L600♥♣♦00
≤19	63	6651	106	Ø900	90626L900♥♣♦♦00
≤19	92	9596	104	Ø1200	90626L120♥♣♦♦00
≤19	110	11558	105	Ø1500	90626L150♥♣♦♦00

LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	44	4817	109	Ø600	90636L600♥♣♦♦00
≤22	63	6995	111	Ø900	90636L900♥♣♦♦00
≤22	92	10092	110	Ø1200	90636L120♥♣♦♦00
≤22	110	12156	111	Ø1500	90636L150♥♣♦♦00

CONCEPT O 65

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	♣
□ White	W
■ Gray	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0

¹ See page 136.

² Prepared for emergency remote control.

02. Select options

OPTIONS	Code*
Bluetooth	927200
• Bluetooth wireless control via smartphone.	
Suspension	
S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	
Round ceiling rose	
Surface mounted T24 D95 45 l  Ø95	978600♣
Surface mounted T26 D95 (DALI+K3)	978601♣
Recessed T5 D90  Ø70 33 l  Ø90	971300♣
Recessed T27 D90 (DALI+K3)	978700♣
Central ceiling rose	
Surface T21 3l D95 45 l  Ø95	977211♣
Surface T28 3l D95 (DALI+K3)	977230♣



*Replace the symbols to complete the code

Colour

☐ White	W
☒ Black	B



Select options



Suspended application



Suspended application with central ceiling rose



gCONTROL+ diffuser



LIGHT+ diffuser



Indirect light



Parallel suspension with recessed ceiling rose



Parallel suspension with surface mounted ceiling rose



Central suspension

