





Technical
lighting

CORA



CORA /E
620




CORA
624




CORA /C
628



Application types

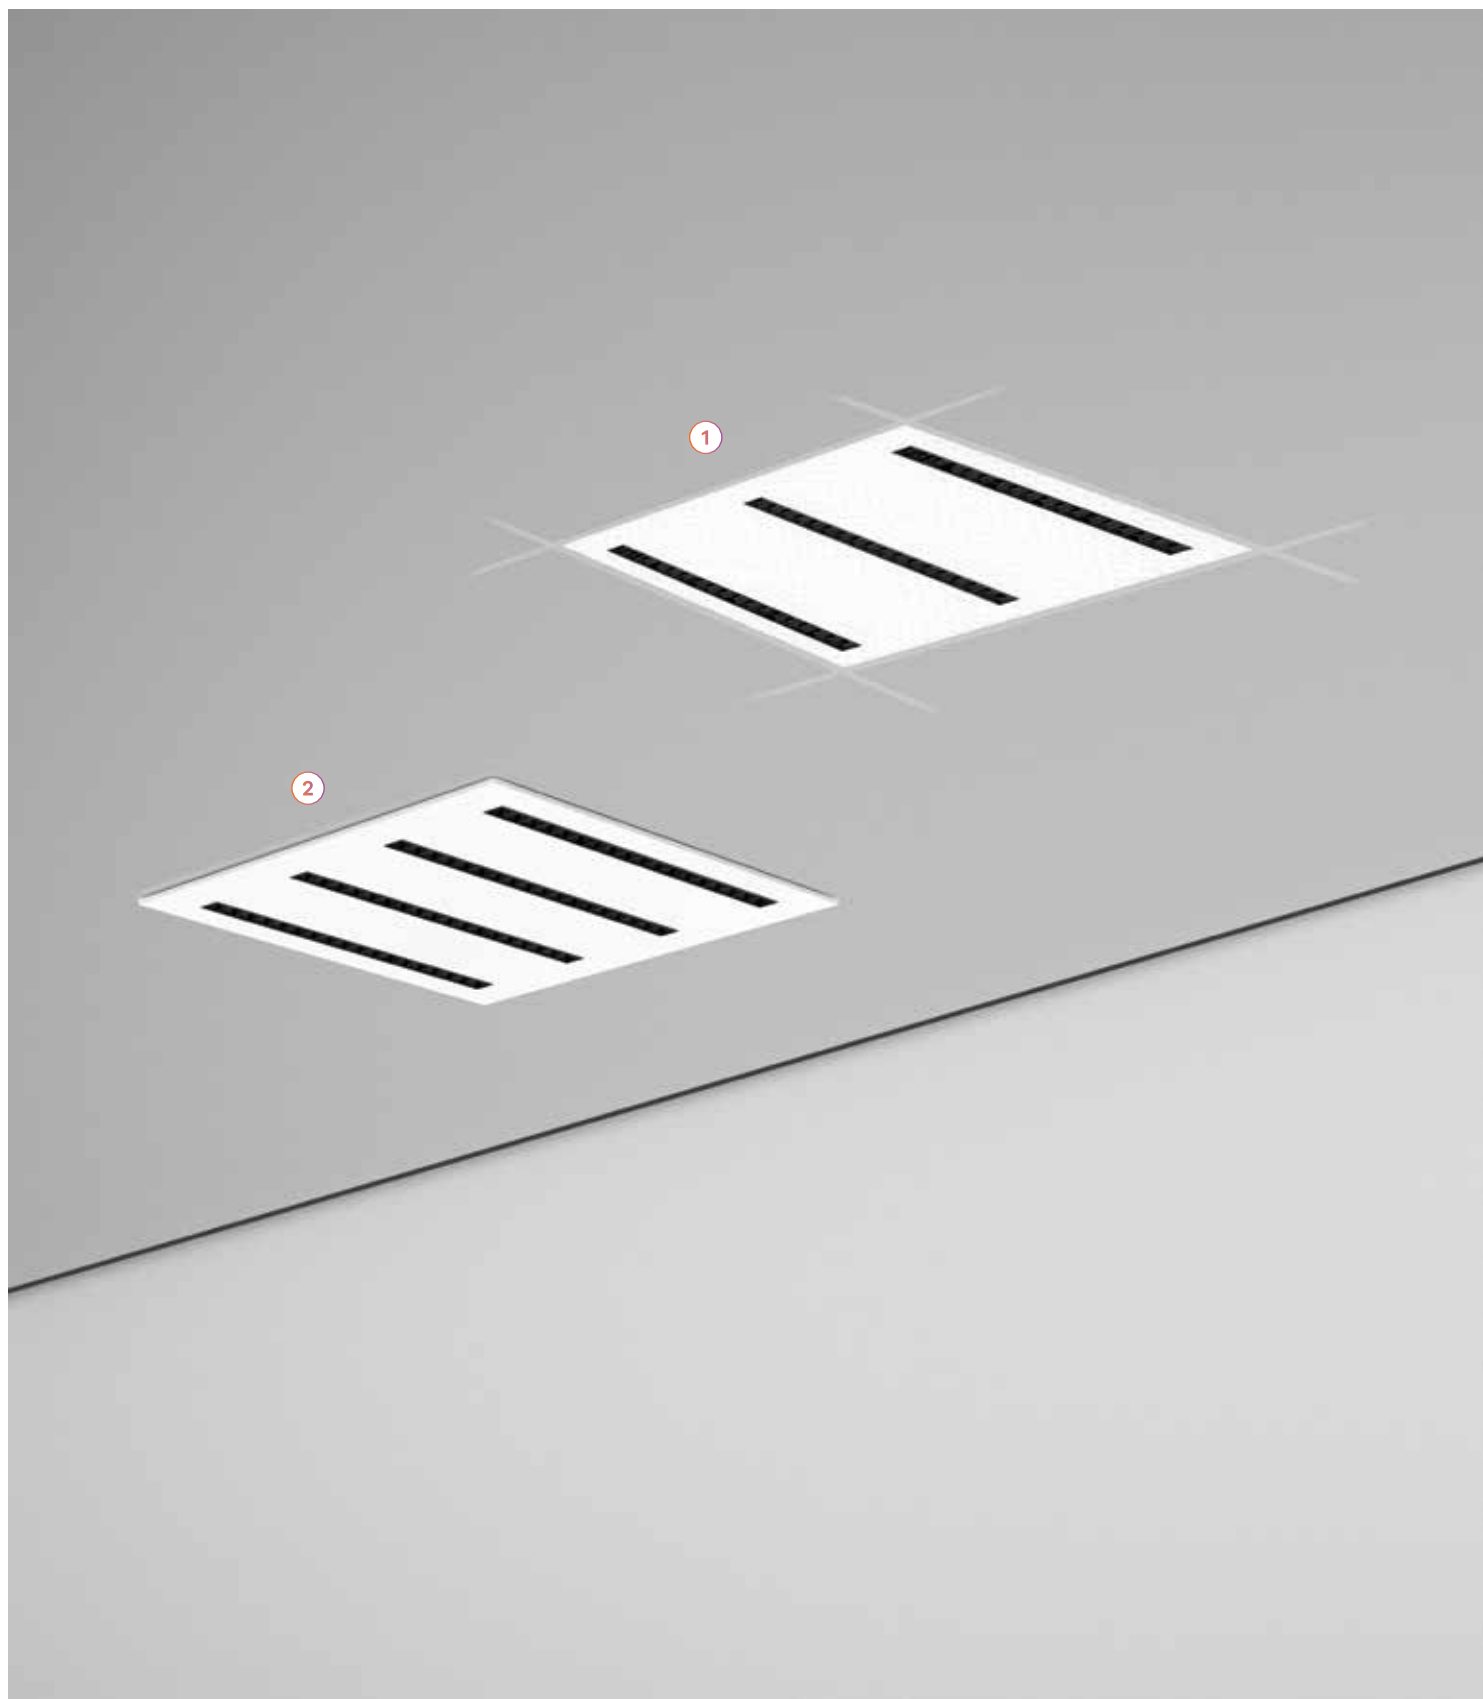

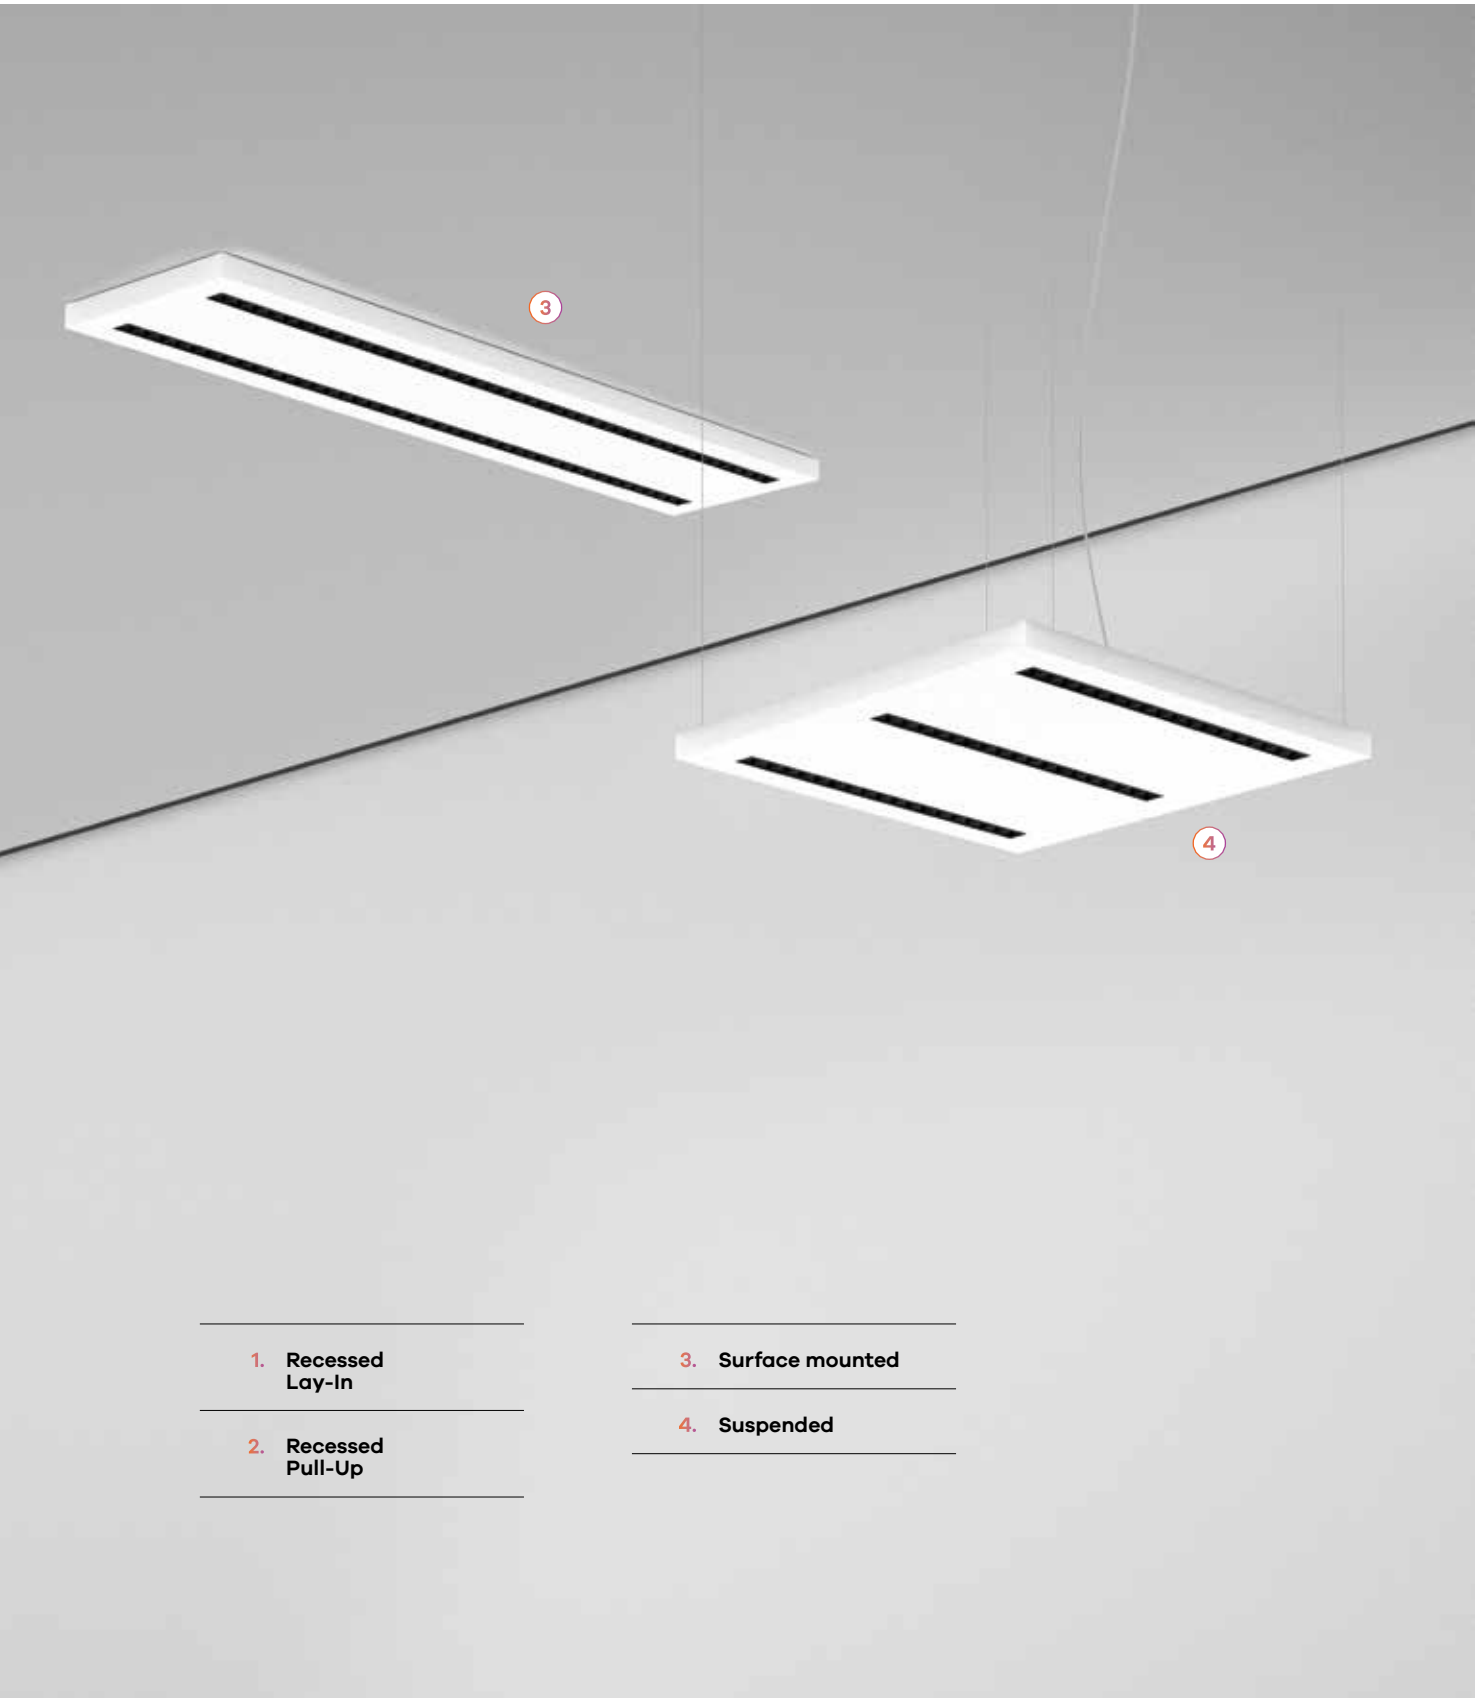


**1. Recessed
Lay-In**

**2. Recessed
Pull-Up**

3. Surface mounted

4. Suspended

CORA /E

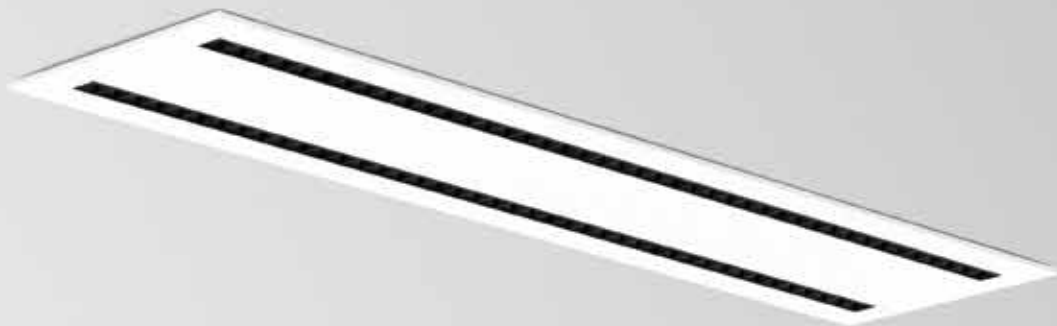

Product characteristics


Body Steel sheet
Finish Powder coated
Optical system bOPTICS - Symmetric reflector
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness Lay-in: for exposed T grid ceilings of 15/24mm without brackets Pull-up: for plasterboard ceilings of 10, 13, 15 and 18mm with brackets

CE	RoHS
230V/50Hz	
	IP 20
650°C	


01. Select version



CORA /E 2



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	Lmm	Beam diameter	CODE*
≤10	18	2272	126	597	572x272	90729L260♥♣♦♦00
≤10	30	3779	126	897	872x272	90729L290♥♣♦♦♦00
≤10	39	5286	136	1197	1172x272	90729L212♥♣♦♦♦00
≤10	50	6816	136	1497	1472x272	90729L215♥♣♦♦♦00

*Replace the symbols to complete the code


Control gear	Symbol
HF	E
DALI	H

Colour	Symbol
White	W
Black	B


Emergency	Symbol
No EM	0
EM 3h (K3) ¹	3

Colour temp.	Symbol
3000K	3
4000K	0

CORA /E 3




bOPTICS - Symmetric reflector 48°




UGR	W	lm output	lm/W	Beam diameter	CODE*
≤10	26	3408	131	572x572	90729Q360♥♣♦♦♦00

CORA /E 4



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	Beam diameter	CODE*
≤10	34	4544	134	572x572	90729Q460♥♣♦♦♦00

CORA 2 | CORA 3 | CORA 4

- For the recessed version in plasterboard ceilings add the recessed mounting kit (x4). Please order separately.

¹ Prepared for emergency remote control.

02. Select options

OPTIONS	Code
Recessed mounting kit (x4)	927700
Steel safety cable L1500 mm	955000
Low Output version • Under request.	
Bespoke projects • Under request.	



Product details




Recessed application
by pull-up



Recessed application
by lay-in



bOPTICS diffuser




Pull-up recessed
version



Plasterboard ceiling
installation detail



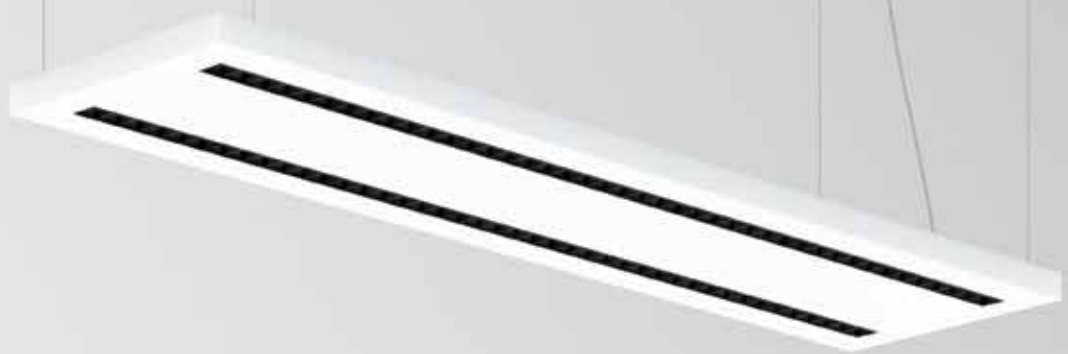

Product
characteristics


Body Steel sheet	
Finish Powder coated	
Optical system bOPTICS - Symmetric reflector	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 80.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

230V/50Hz	
	IP 20
650°C	


01. Select version



CORA 2



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	Lmm	CODE*
≤10	18	2272	126	597	90727L260♥♣♦♦00
≤10	30	3779	126	897	90727L290♥♣♦♦00
≤10	39	5286	136	1197	90727L212♥♣♦♦00
≤10	50	6816	136	1497	90727L215♥♣♦♦00

*Replace the symbols to complete the code


Control gear	♥
HF	E
DALI	H

Colour	♣
□ White	W
■ Black	B


Emergency	♦
No EM	0
EM 3h (K3) ¹	3

Colour temp.	♦
3000K	3
4000K	0

CORA 3




bOPTICS - Symmetric reflector 48°




UGR	W	lm output	lm/W	CODE*
≤10	26	3408	131	90727Q360♥♣♦♦00

CORA 4



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	CODE*
≤10	34	4544	134	90727Q460♥♣♦♦00

CORA 2 | CORA 3 | CORA 4

• To complete the product add the suspension, current supply cable and ceiling rose. Please order separately.

¹ Prepared for emergency remote control.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the option DALI with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	
Ceiling rose	
Surface mounted T25 45  100	978610♣
Surface mounted T29 (DALI+K3)	978611♣
Recessed T7  Ø70 35  90	971400♣
Recessed T59 (DALI+K3)	971410♣
Low Output version	
• Under request.	



*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B




Product details



Suspended application



bOPTICS diffuser



Ceiling roses



CORA /C



Product
characteristics

Body Steel sheet	
Finish Powder coated	
Optical system bOPTICS - Symmetric reflector	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 80.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏏	IP 20
650°C	

01. Select version



*Replace the symbols to complete the code

Control gear

HF E

DALI H

Colour

□ White W

■ Black B

Emergency

No EM 0


EM 3h (K3) ¹ 3

Colour temp.


3000K 3

4000K 0

CORA /C 2




bOPTICS - Symmetric reflector 48°




UGR	W	lm output	lm/W	Lmm	CODE*
≤10	18	2272	126	597	90728L260♥♣♦00
≤10	30	3779	126	897	90728L290♥♣♦00
≤10	39	5286	136	1197	90728L212♥♣♦00
≤10	50	6816	136	1497	90728L215♥♣♦00

CORA /C 3




bOPTICS - Symmetric reflector 48°




UGR	W	lm output	lm/W	CODE*
≤10	26	3408	131	90728Q360♥♣♦00

CORA /C 4



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	CODE*
≤10	34	4544	134	90728Q460♥♣♦00

¹ Prepared for emergency remote control.

02. Select options

OPTIONS	Code
Low Output version • Under request.	



Product details



Ceiling surface application



bOPTICS diffuser

