




Waterproof
luminaires

DORIS

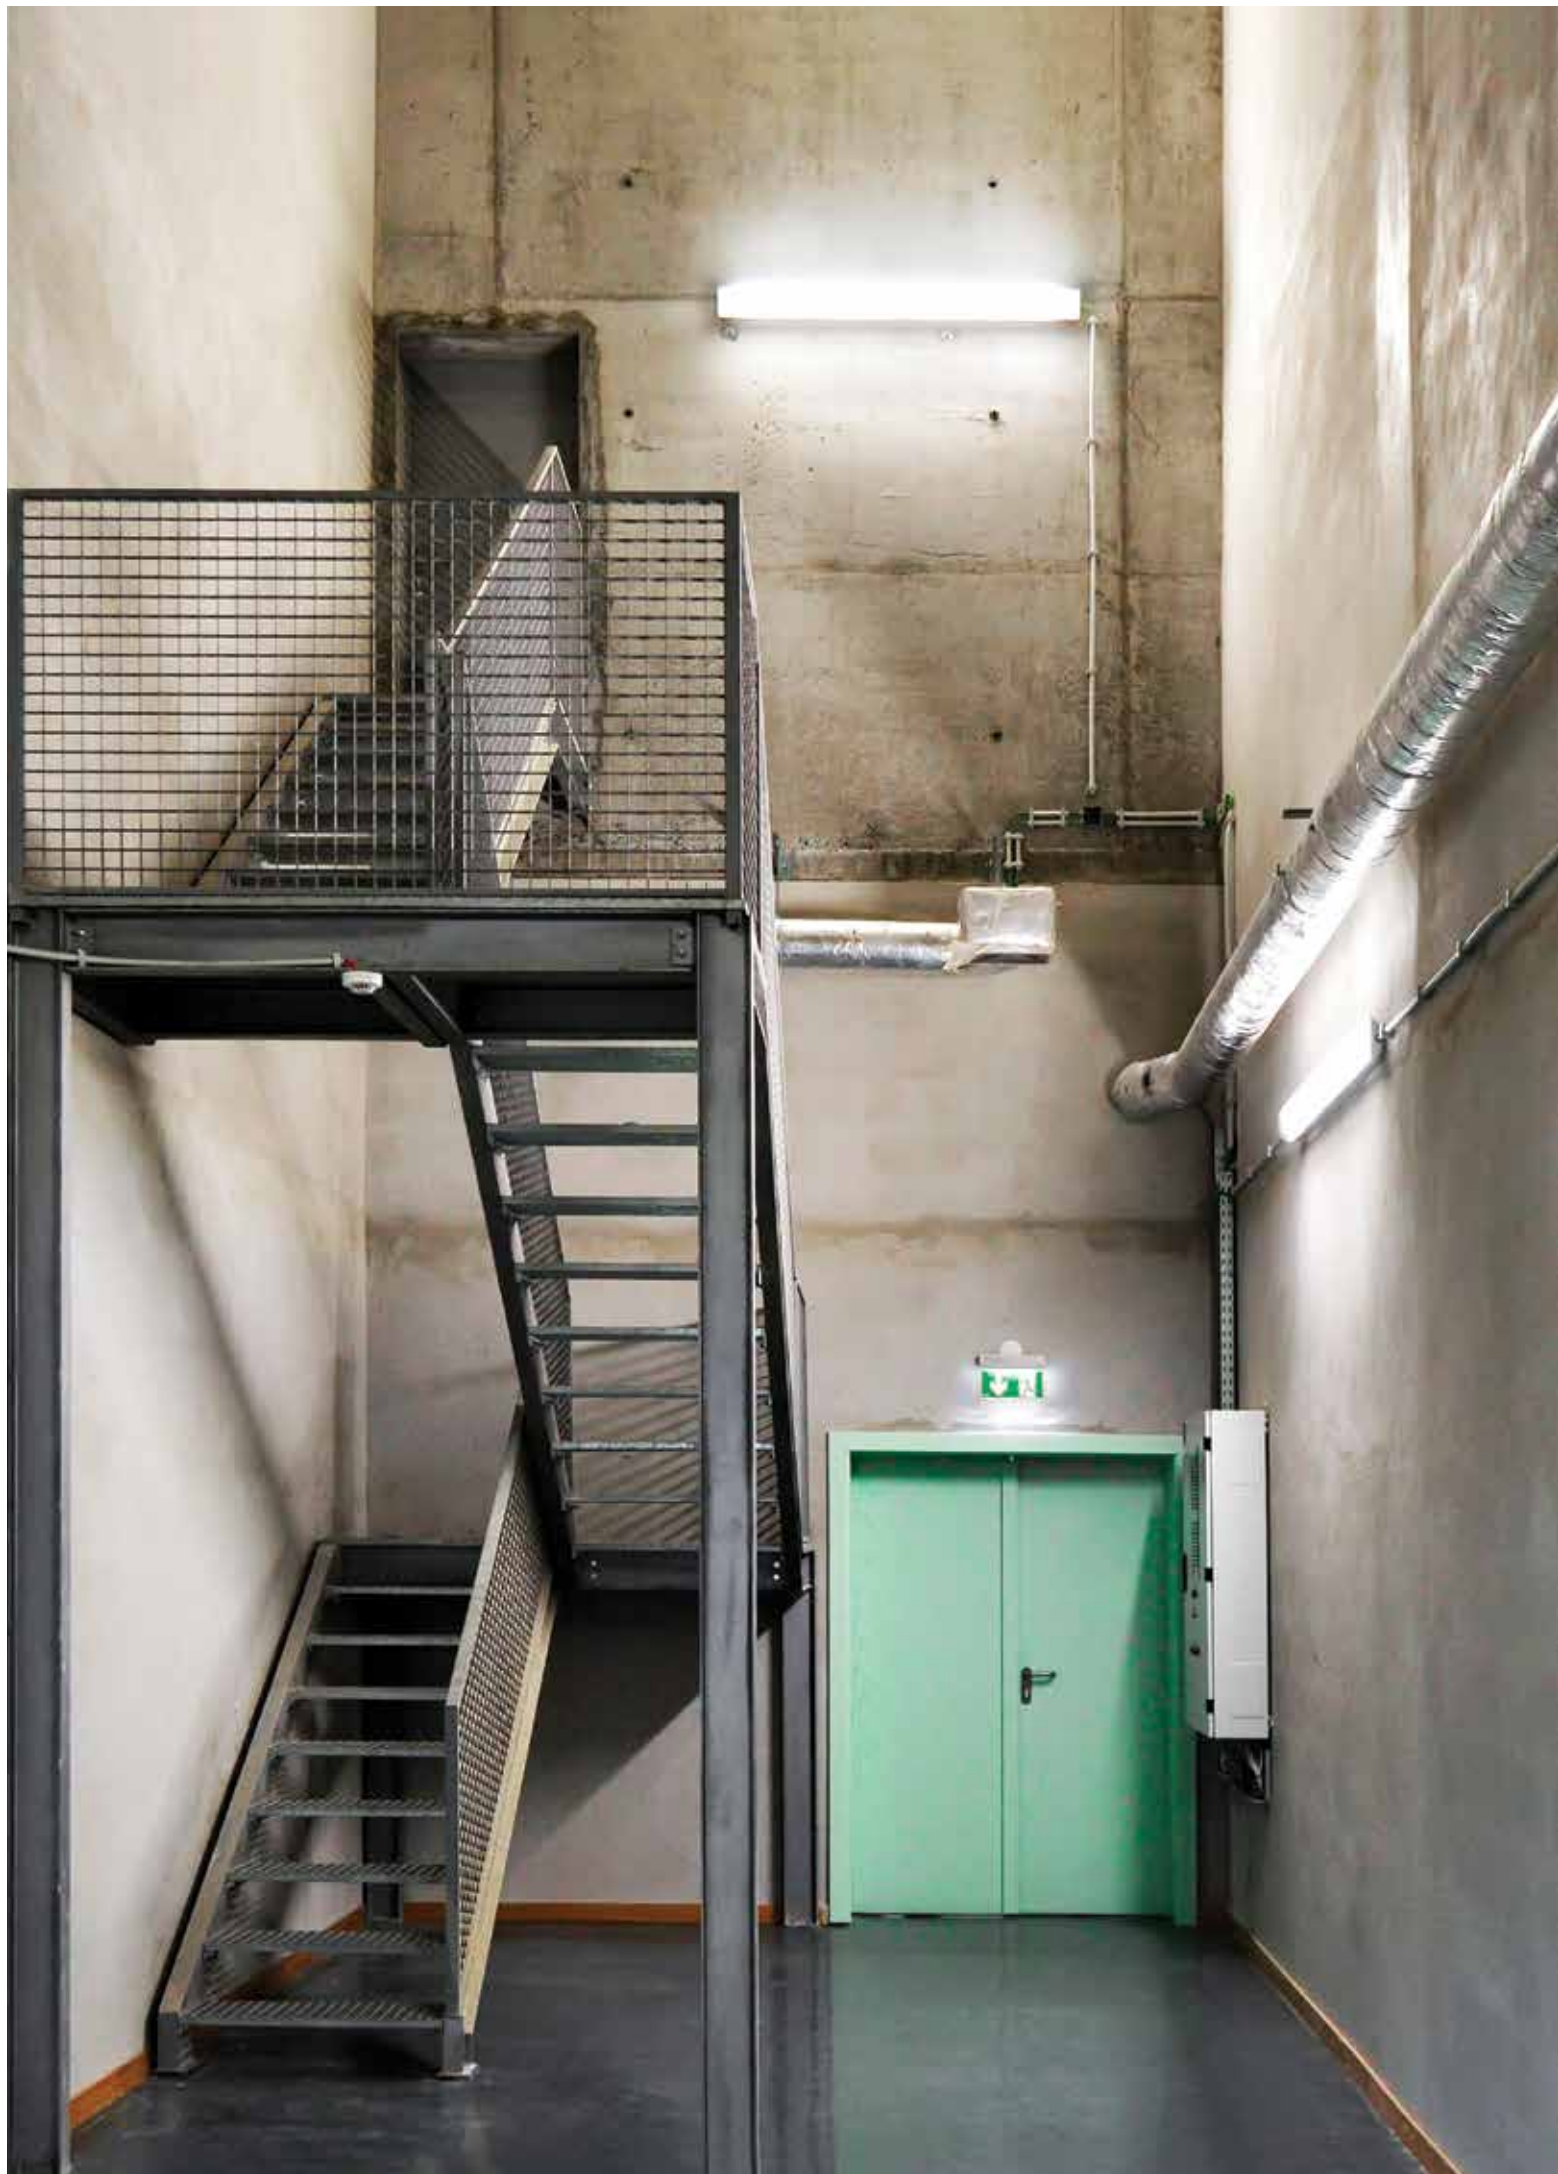

DORIS
752





Product characteristics


- Body**
Polycarbonate and polyurethane foam gasket
- Finish**
White powder coated gear tray
- Fixing system**
Stainless steel fixing brackets and clips
- Optical system**
PC0 - Opal polycarbonate diffuser
- Light source**
4000K LED, RG1, CRI>80, MacAdam Step ≤3
- LED lifetime**
50.000h @ L90, B10, Ta 25°C
- Control gear**
LED driver 220-240V-50/60Hz included

230V/50Hz		IP 66
IK 10	850°C	


01. Select version



DORIS



PC0 - Opal polycarbonate diffuser



W	lm output	lm/W	Lmm	Dmm	CODE*
14	1960	140	662	350	90617L060●0●000
27	3870	143	1272	700	90617L120●0●000
38	5570	147	1272	700	90617L122●0●000
33	4820	146	1572	940	90617L150●0●000
45	6890	153	1572	940	90617L152●0●000

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3



Product details



Stainless steel clips



Stainless steel fixing brackets for surface installation



Stainless steel fixing brackets for suspended installation



Body prepared for Loop In / Loop Out



Opal polycarbonate diffuser

¹ Prepared for emergency remote control.