





# ELI 50



**ELI 50 / E 1**  
284



**ELI 50 / E 2**  
286



**ELI 50 Sq / E 1**  
288



**ELI 50 Sq / E 2**  
290



**ELI 50**  
294



**ELI 50 Sq**  
296



**ELI 50 / C**  
300



**ELI 50 Sq / C**  
302



**ELI 50 / W**  
304




**ELI 50 Sq / W**  
306




**ELI 50 / W D/I**  
308



**ELI 50 Sq / W D/I**  
310



**ELI 50 Spot / E 1**  
314



**ELI 50 Spot / E 2**  
316




**ELI 50 Spot / C**  
318




**ELI 50 Spot Track**  
320



## Application types

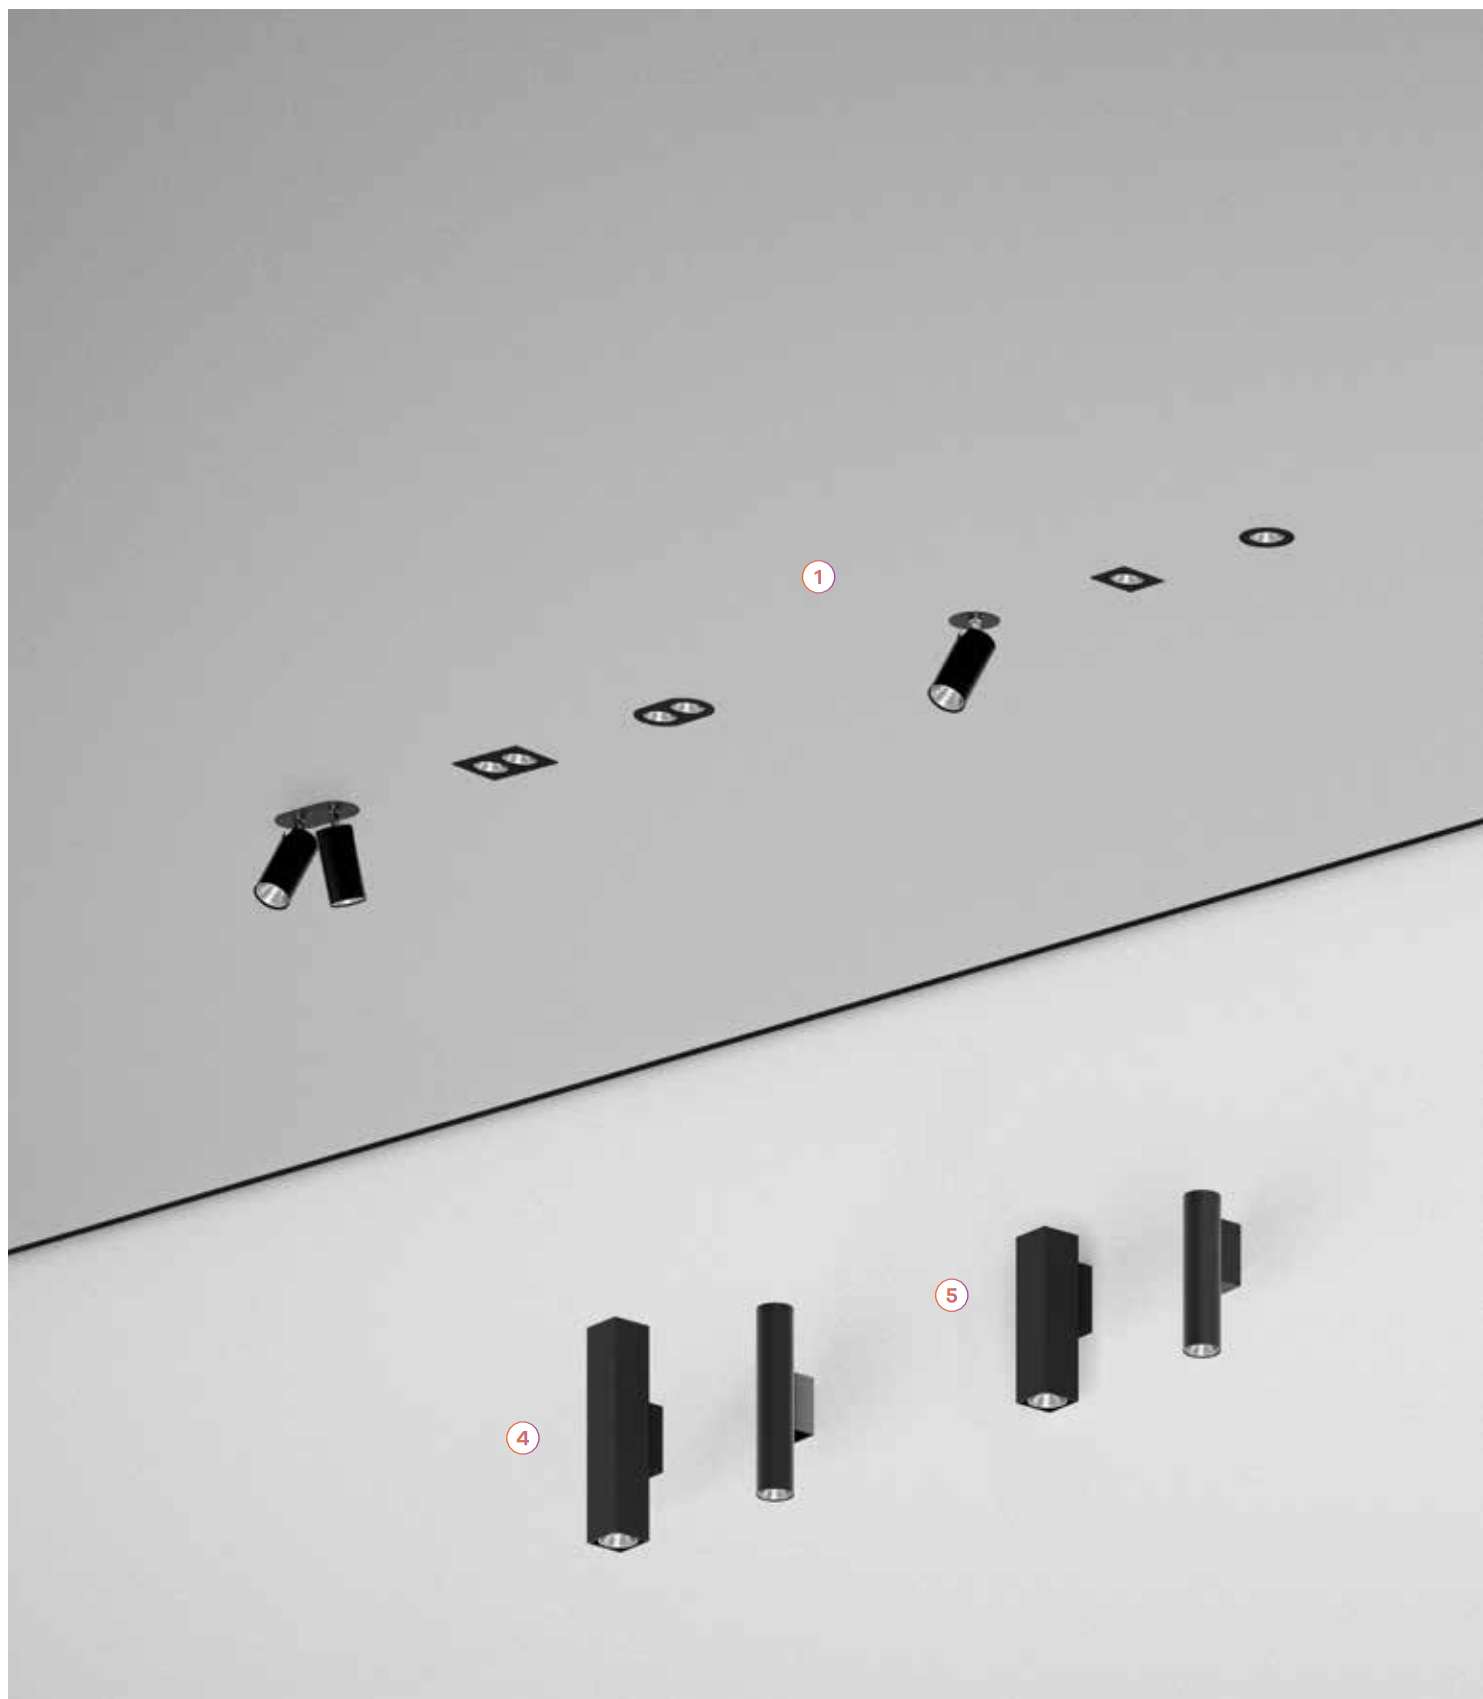

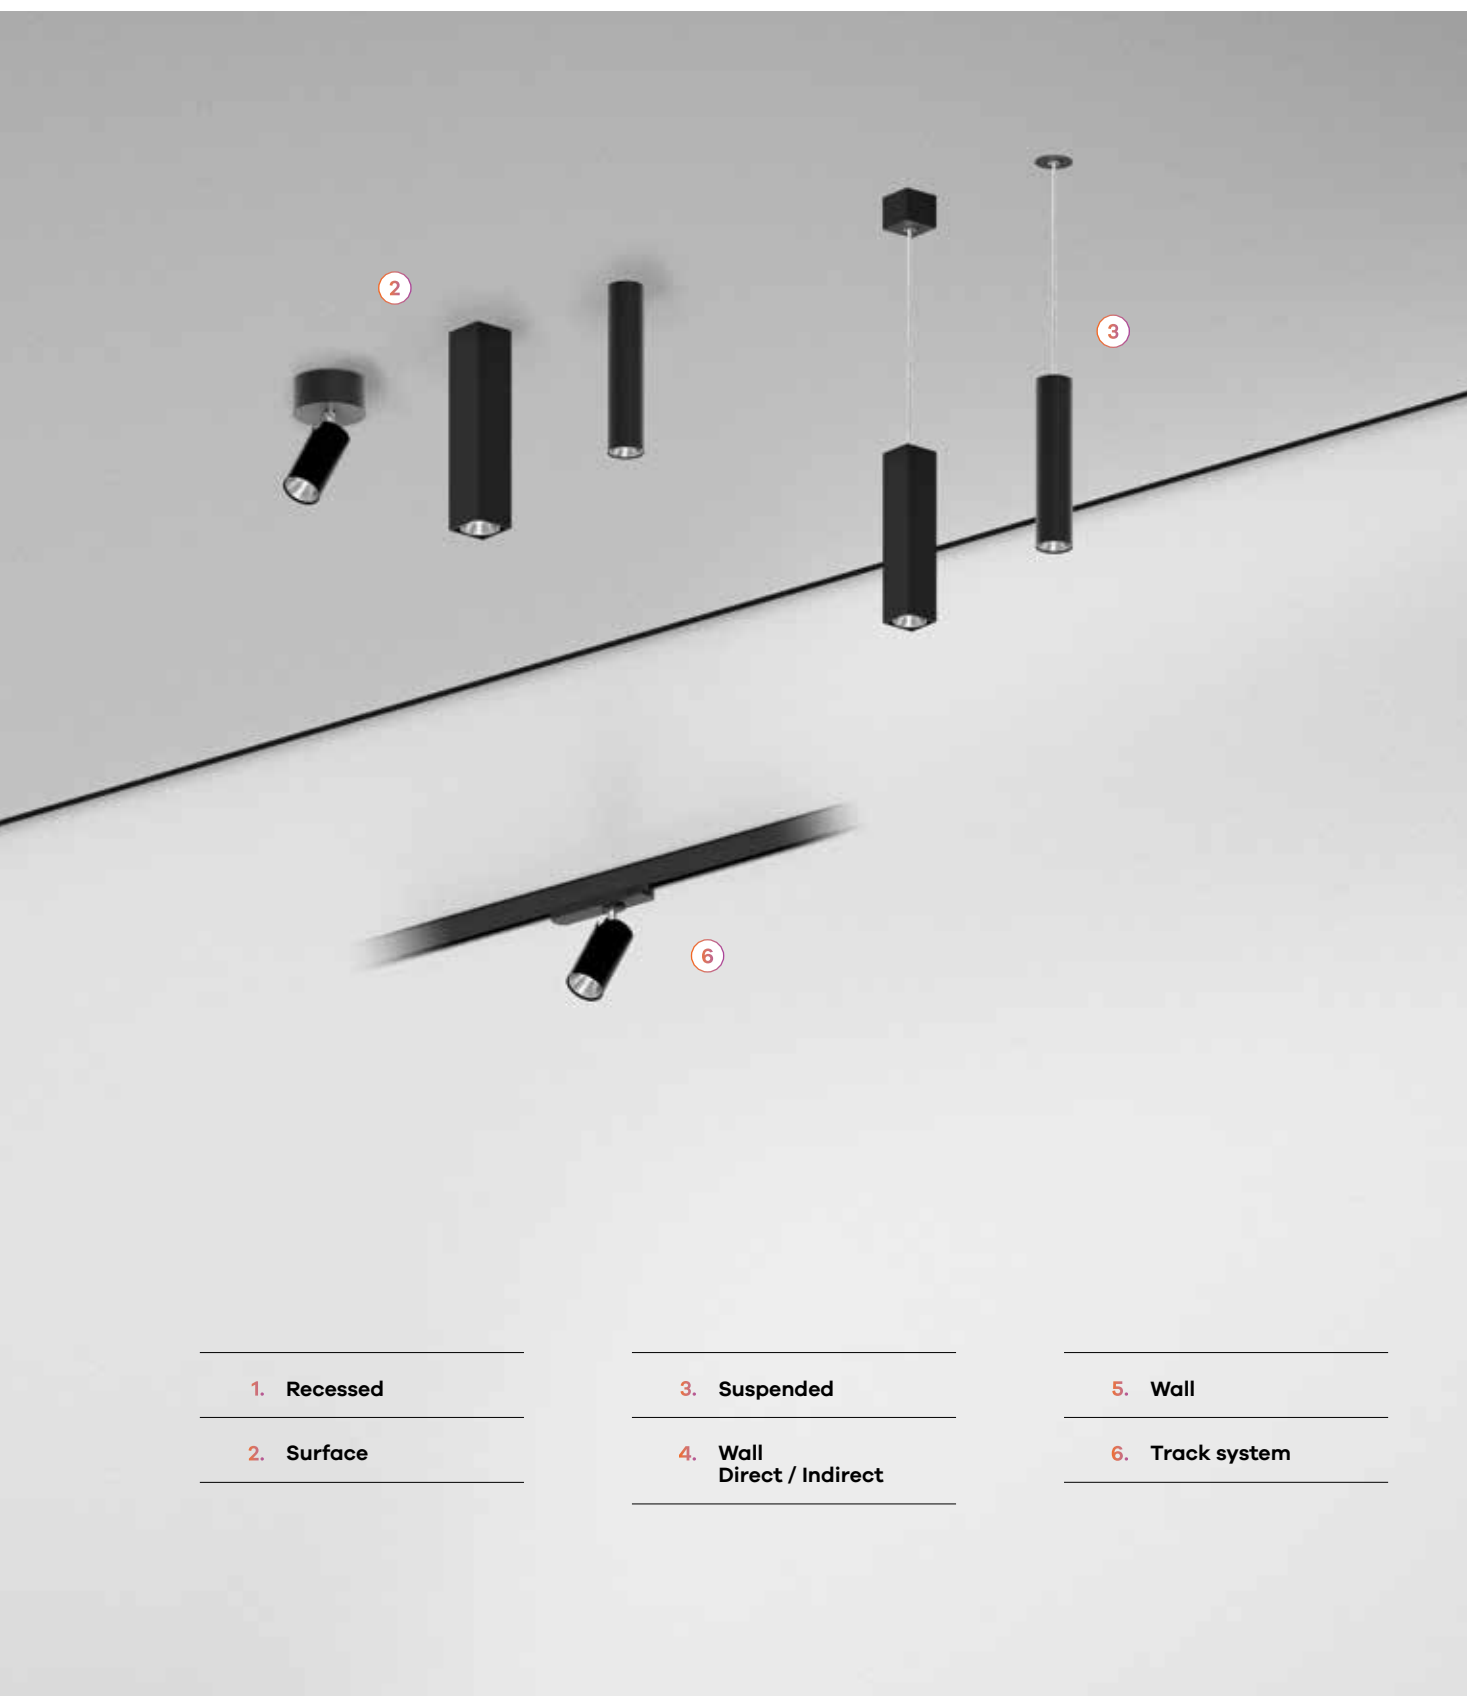

1. Recessed

2. Surface

3. Suspended

4. Wall  
Direct / Indirect

5. Wall

6. Track system

ELI 50 /E 1



Product  
characteristics

|                                                          |
|----------------------------------------------------------|
| <b>Body</b><br>Aluminium                                 |
| <b>Finish</b><br>Powder coated                           |
| <b>Optical system</b><br>PB - Shiny reflector            |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b><br>Not included                      |
| <b>Ceiling thickness</b><br>For ceilings between 1-25 mm |

|              |              |
|--------------|--------------|
|              |              |
|              | <b>IP 20</b> |
| <b>650°C</b> |              |


01. Select version



ELI 50 /E 1



PB - Shiny reflector - 20°



# ELI 50 /E 2



## Product characteristics

|                                                          |
|----------------------------------------------------------|
| <b>Body</b><br>Aluminium                                 |
| <b>Finish</b><br>Powder coated                           |
| <b>Optical system</b><br>PB - Shiny reflector            |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b><br>Not included                      |
| <b>Ceiling thickness</b><br>For ceilings between 1-25 mm |




## 01. Select version



### ELI 50 / E 2



#### PB - Shiny reflector - 20°



CO - C180  
C90 - C270


| W  | lm output | lm/W | mA  | Ø       | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1494      | 149  | 300 | Ø60X120 | 90695L0020▲0◆20 |
| 17 | 2336      | 137  | 500 | Ø60X120 | 90694L0020▲0◆20 |

\*Replace the symbols to complete the code

| Colour  | ▲ |
|---------|---|
| □ White | W |
| ■ Black | B |

| Colour temp. | ◆ |
|--------------|---|
| 3000K        | 3 |
| 4000K        | 0 |

#### PB - Shiny reflector - 50°



CO - C180  
C90 - C270

| W  | lm output | lm/W | mA  | Ø       | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1448      | 145  | 300 | Ø60X120 | 90695L0020▲0◆50 |
| 17 | 2288      | 135  | 500 | Ø60X120 | 90694L0020▲0◆50 |

### ELI 50 / E 2

• To complete the product add the control gear. Please order separately.

## 02. Select options

### OPTIONS Code

#### Control gear HF

|                              |         |
|------------------------------|---------|
| Driver 12,6W 10-42V 300mA HF | 900003E |
| Driver 21W 10-42V 500mA HF   | 900007E |

#### Control gear dimmable DALI

|                                      |         |
|--------------------------------------|---------|
| Driver 15,6W 09-52V 300mA DALI+ PUSH | 900103H |
| Driver 26W 09-52V 500mA DALI+ PUSH   | 900107H |

#### Steel safety cable

|          |        |
|----------|--------|
| L1500 mm | 955010 |
|----------|--------|

# ELI 50 Sq /E 1



## Product characteristics


|                                                          |
|----------------------------------------------------------|
| <b>Body</b><br>Aluminium                                 |
| <b>Finish</b><br>Powder coated                           |
| <b>Optical system</b><br>PB - Shiny reflector            |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b><br>Not included                      |
| <b>Ceiling thickness</b><br>For ceilings between 1-25 mm |

|              |              |
|--------------|--------------|
|              |              |
|              | <b>IP 20</b> |
| <b>650°C</b> |              |


01. Select version



ELI 50 Sq /E 1




PB - Shiny reflector - 20°



| W | lm output | lm/W | mA  | Ø   | CODE*           |
|---|-----------|------|-----|-----|-----------------|
| 5 | 747       | 149  | 150 | Ø65 | 90697L0010▲0◆20 |
| 9 | 1168      | 130  | 250 | Ø65 | 90696L0010▲0◆20 |

PB - Shiny reflector - 50°



| W | lm output | lm/W | mA  | Ø   | CODE*           |
|---|-----------|------|-----|-----|-----------------|
| 5 | 724       | 145  | 150 | Ø65 | 90697L0010▲0◆50 |
| 9 | 1144      | 127  | 250 | Ø65 | 90696L0010▲0◆50 |

\*Replace the symbols to complete the code

| Colour  | ▲ |
|---------|---|
| □ White | W |
| ■ Black | B |

| Colour temp. | ◆ |
|--------------|---|
| 3000K        | 3 |
| 4000K        | 0 |

ELI 50 Sq /E 1

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS Code

| Control gear HF              |         |
|------------------------------|---------|
| Driver 6,3W 10-42V 150mA HF  | 900000E |
| Driver 10,5W 10-42V 250mA HF | 900002E |

| Control gear dimmable DALI          |         |
|-------------------------------------|---------|
| Driver 7,8W 09-52V 150mA DALI+ PUSH | 900100H |
| Driver 13W 09-52V 250mA DALI+ PUSH  | 900102H |

| Steel safety cable |        |
|--------------------|--------|
| L1500 mm           | 955010 |

# ELI 50 Sq /E 2



## Product characteristics


|                                   |
|-----------------------------------|
| <b>Body</b>                       |
| Aluminium                         |
| <b>Finish</b>                     |
| Powder coated                     |
| <b>Optical system</b>             |
| PB - Shiny reflector              |
| <b>Light source</b>               |
| LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b>               |
| 60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b>               |
| Not included                      |
| <b>Ceiling thickness</b>          |
| For ceilings between 1-25 mm      |




## 01. Select version



### ELI 50 Sq / E 2




#### PB - Shiny reflector - 20°



| W  | lm output | lm/W | mA  | Symbol  | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1494      | 149  | 300 | Ø60X120 | 90697L0020▲0◆20 |
| 17 | 2336      | 137  | 500 | Ø60X120 | 90696L0020▲0◆20 |

#### PB - Shiny reflector - 50°



| W  | lm output | lm/W | mA  | Symbol  | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1448      | 145  | 300 | Ø60X120 | 90697L0020▲0◆50 |
| 17 | 2288      | 135  | 500 | Ø60X120 | 90696L0020▲0◆50 |

\*Replace the symbols to complete the code

| Colour  | Symbol |
|---------|--------|
| □ White | W      |
| ■ Black | B      |

| Colour temp. | Symbol |
|--------------|--------|
| 3000K        | 3      |
| 4000K        | 0      |

### ELI 50 Sq / E 2

• To complete the product add the control gear. Please order separately.

## 02. Select options

### OPTIONS Code

#### Control gear HF

|                              |         |
|------------------------------|---------|
| Driver 12,6W 10-42V 300mA HF | 900003E |
| Driver 21W 10-42V 500mA HF   | 900007E |

#### Control gear dimmable DALI

|                                      |         |
|--------------------------------------|---------|
| Driver 15,6W 09-52V 300mA DALI+ PUSH | 900103H |
| Driver 26W 09-52V 500mA DALI+ PUSH   | 900107H |

#### Steel safety cable

|          |        |
|----------|--------|
| L1500 mm | 955010 |
|----------|--------|





ELI 50



Product  
characteristics


|                                                             |  |
|-------------------------------------------------------------|--|
| <b>Body</b><br>Aluminium                                    |  |
| <b>Finish</b><br>Powder coated                              |  |
| <b>Optical system</b><br>PB - Shiny reflector               |  |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |  |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |  |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |  |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |


## 01. Select version



### ELI 50



#### PB - Shiny reflector - 20°




W  
7  
11

lm  
output  
747  
1168

lm/W  
107  
106

CODE\*  
90679L240▼▲0◆20  
90678L240▼▲0◆20

#### PB - Shiny reflector - 50°



W  
7  
11

lm  
output  
724  
1144

lm/W  
103  
104

CODE\*  
90679L240▼▲0◆50  
90678L240▼▲0◆50

\*Replace the symbols to complete the code

Control gear ▼  
HF E  
DALI H

Colour ▲  
□ White W  
■ Black B

Colour temp. ◆  
3000K 3  
4000K 0

### ELI 50

• To complete the product add the current supply cable and the ceiling rose. Please order separately.

## 02. Select options



### Product details

#### OPTIONS Code\*

##### Transparent current supply cable

|                                     |        |
|-------------------------------------|--------|
| L1500 mm - 3 x 0,75 mm <sup>2</sup> | 940400 |
| L1500 mm - 5 x 0,75 mm <sup>2</sup> | 940500 |
| L3000 mm - 3 x 0,75 mm <sup>2</sup> | 940401 |
| L3000 mm - 5 x 0,75 mm <sup>2</sup> | 940501 |
| L6000 mm - 3 x 0,75 mm <sup>2</sup> | 940402 |
| L6000 mm - 5 x 0,75 mm <sup>2</sup> | 940507 |

##### Round ceiling rose

|                  |               |         |
|------------------|---------------|---------|
| Surface T41 D50  | 45    Ø50     | 978805▲ |
| Recessed T42 D50 | Ø40 32    Ø50 | 978804▲ |

\*Replace the symbols to complete the code

Colour ▲  
□ White W  
■ Black B



Ceiling rose

ELI 50 Sq



Product  
characteristics

|                                                             |  |
|-------------------------------------------------------------|--|
| <b>Body</b><br>Aluminium                                    |  |
| <b>Finish</b><br>Powder coated                              |  |
| <b>Optical system</b><br>PB - Shiny reflector               |  |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |  |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |  |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |  |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |

01. Select version




\*Replace the symbols to complete the code

**Control gear** ▼  
HF E  
DALI H


**Colour** ▲  
□ White W  
■ Black B

**Colour temp.** ◆  
3000K 3  
4000K 0

ELI 50 Sq



PB - Shiny reflector - 20°




W  
7  
11

lm  
output  
747  
1168

lm/W  
107  
106

**CODE\***  
90687L240▼▲0◆20  
90686L240▼▲0◆20

PB - Shiny reflector - 50°



W  
7  
11

lm  
output  
724  
1144

lm/W  
103  
104

**CODE\***  
90687L240▼▲0◆50  
90686L240▼▲0◆50


ELI 50 Sq

•To complete the product add the current supply cable and the ceiling rose. Please order separately.

02. Select options



Product details



Ceiling rose

OPTIONS Code\*

Transparent current supply cable

|                                     |        |
|-------------------------------------|--------|
| L1500 mm - 3 x 0,75 mm <sup>2</sup> | 940400 |
| L1500 mm - 5 x 0,75 mm <sup>2</sup> | 940500 |
| L3000 mm - 3 x 0,75 mm <sup>2</sup> | 940401 |
| L3000 mm - 5 x 0,75 mm <sup>2</sup> | 940501 |
| L6000 mm - 3 x 0,75 mm <sup>2</sup> | 940402 |
| L6000 mm - 5 x 0,75 mm <sup>2</sup> | 940507 |

Square ceiling rose

Surface T46 Q50 47 |  50 978807▲

Recessed T47 Q50  Ø40 32 |  50 978808▲

\*Replace the symbols to complete the code

**Colour** ▲  
□ White W  
■ Black B





ELI 50 /C



Product  
characteristics


|                                                             |  |
|-------------------------------------------------------------|--|
| <b>Body</b><br>Aluminium                                    |  |
| <b>Finish</b><br>Powder coated                              |  |
| <b>Optical system</b><br>PB - Shiny reflector               |  |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |  |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |  |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |  |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |


## 01. Select version



ELI 50 /C



## PB - Shiny reflector - 20°




| W  | Im<br>output | Im/W | CODE*           |
|----|--------------|------|-----------------|
| 7  | 747          | 107  | 90681L240♥♠♣♦20 |
| 11 | 1168         | 106  | 90680L240♥♠♣♦20 |

**\*Replace the symbols to complete the code**

|         |   |
|---------|---|
| Control | ♥ |
| gear    |   |
| HF      | E |
| DALI    | H |

| Colour                                                                                    | ♠ |
|-------------------------------------------------------------------------------------------|---|
|  White | W |
|  Black | B |

**PB - Shiny reflector - 50°**



| W  | Im<br>output | Im/W | CODE*           |
|----|--------------|------|-----------------|
| 7  | 724          | 103  | 90681L240♥♠♠♠50 |
| 11 | 1144         | 104  | 90680L240♥♠♠♠50 |

|                     |   |
|---------------------|---|
| <b>Colour temp.</b> | ◆ |
| 3000K               | 3 |
| 4000K               | 0 |

ELI 50 Sq /C



Product  
characteristics


|                                      |
|--------------------------------------|
| <b>Body</b>                          |
| Aluminium                            |
| <b>Finish</b>                        |
| Powder coated                        |
| <b>Optical system</b>                |
| PB - Shiny reflector                 |
| <b>Light source</b>                  |
| LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b>                  |
| 60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b>                  |
| LED driver 220-240V-50/60Hz included |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |


## 01. Select version



## ELI 50 Sq /C



## PB - Shiny reflector - 20°



| W  | Im<br>output | Im/W | CODE*           |
|----|--------------|------|-----------------|
| 7  | 747          | 107  | 90689L240♥♠♠♦20 |
| 11 | 1168         | 106  | 90688L240♥♠♠♦20 |

**CODE\***

90689L240♥♠0♦20  
90688L240♥♠0♦20

**\*Replace the symbols to complete the code**


## Control gear

|      |   |
|------|---|
| HF   | E |
| DALI | H |

**Colour**

|                                |   |
|--------------------------------|---|
| <input type="checkbox"/> White | W |
| <input type="checkbox"/> Black | B |

**PB - Shiny reflector - 50°**



| W  | Im<br>output | Im/W | CODE*           |
|----|--------------|------|-----------------|
| 7  | 724          | 103  | 90689L240♥♠♠♠50 |
| 11 | 1144         | 104  | 90688L240♥♠♠♠50 |

**CODE\***

90689L240♥♠0♦50  
90688L240♥♠0♦50

**Colour temp.**

|       |   |
|-------|---|
| 3000K | 3 |
| 4000K | 0 |

ELI 50 /W



Product  
characteristics


|                                                             |  |
|-------------------------------------------------------------|--|
| <b>Body</b><br>Aluminium                                    |  |
| <b>Finish</b><br>Powder coated                              |  |
| <b>Optical system</b><br>PB - Shiny reflector               |  |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |  |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |  |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |  |

|           |                   |
|-----------|-------------------|
| CE        | RoHS<br>COMPLIANT |
| 230V/50Hz |                   |
| ⏚         | IP 20             |
| 650°C     |                   |


01. Select version



ELI 50 /W



PB - Shiny reflector - 20°



W  
7  
11

lm  
output  
747  
1168

lm/W  
107  
106


CODE\*  
90683L200▼▲0◆20  
90682L200▼▲0◆20

\*Replace the symbols to complete the code

Control gear  
HF E  
DALI H

Colour  
□ White W  
■ Black B

PB - Shiny reflector - 50°



W  
7  
11

lm  
output  
724  
1144

lm/W  
103  
104

CODE\*  
90683L200▼▲0◆50  
90682L200▼▲0◆50

Colour temp. ◆  
3000K 3  
4000K 0

ELI 50 Sq /W



Product  
characteristics


|                                      |
|--------------------------------------|
| <b>Body</b>                          |
| Aluminium                            |
| <b>Finish</b>                        |
| Powder coated                        |
| <b>Optical system</b>                |
| PB - Shiny reflector                 |
| <b>Light source</b>                  |
| LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b>                  |
| 60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b>                  |
| LED driver 220-240V-50/60Hz included |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |


01. Select version



ELI 50 Sq /W



PB - Shiny reflector - 20°



W  
7  
11

lm  
output  
747  
1168

lm/W  
107  
106


CODE\*  
90691L200▼▲0◆20  
90690L200▼▲0◆20

\*Replace the symbols to complete the code

Control ▼  
gear  
HF E  
DALI H

Colour ▲  
□ White W  
■ Black B

PB - Shiny reflector - 50°



W  
7  
11

lm  
output  
724  
1144

lm/W  
103  
104

CODE\*  
90691L200▼▲0◆50  
90690L200▼▲0◆50

Colour temp. ◆  
3000K 3  
4000K 0

ELI 50 /W D/I



Product  
characteristics


|                                      |
|--------------------------------------|
| <b>Body</b>                          |
| Aluminium                            |
| <b>Finish</b>                        |
| Powder coated                        |
| <b>Optical system</b>                |
| PB - Shiny reflector                 |
| <b>Light source</b>                  |
| LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b>                  |
| 60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b>                  |
| LED driver 220-240V-50/60Hz included |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |


01. Select version



ELI 50 /W D/I



PB - Shiny reflector - 20°



ELI 50 Sq /W D/I



Product  
characteristics

|                                                             |
|-------------------------------------------------------------|
| <b>Body</b><br>Aluminium                                    |
| <b>Finish</b><br>Powder coated                              |
| <b>Optical system</b><br>PB - Shiny reflector               |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |

|           |       |
|-----------|-------|
| CE        | RoHS  |
| 230V/50Hz |       |
| ⏚         | IP 20 |
| 650°C     |       |

01. Select version



| ELI 50 Sq /W D/I |                                   |                |                          |                                 |
|------------------|-----------------------------------|----------------|--------------------------|---------------------------------|
|                  | <b>PB - Shiny reflector - 20°</b> |                |                          |                                 |
|                  |                                   | <b>W</b><br>10 | <b>lm output</b><br>1254 | <b>lm/W</b><br>125              |
|                  |                                   |                |                          | <b>CODE*</b><br>90692L260▼▲0◆20 |
|                  | <b>PB - Shiny reflector - 50°</b> |                |                          |                                 |
|                  |                                   | <b>W</b><br>10 | <b>lm output</b><br>1214 | <b>lm/W</b><br>121              |
|                  |                                   |                |                          | <b>CODE*</b><br>90692L260▼▲0◆50 |

\*Replace the symbols to complete the code

|                     |   |
|---------------------|---|
| <b>Control gear</b> | ▼ |
| HF                  | E |
| DALI                | H |
| <b>Colour</b>       | ▲ |
| □ White             | W |
| ■ Black             | B |
| <b>Colour temp.</b> | ◆ |
| 3000K               | 3 |
| 4000K               | 0 |





# ELI 50 Spot /E 1



## Product characteristics


|                                                          |
|----------------------------------------------------------|
| <b>Body</b><br>Aluminium                                 |
| <b>Finish</b><br>Powder coated                           |
| <b>Optical system</b><br>PB - Shiny reflector            |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b><br>Not included                      |
| <b>Ceiling thickness</b><br>For ceilings between 1-25 mm |

|              |              |
|--------------|--------------|
|              |              |
|              | <b>IP 20</b> |
| <b>650°C</b> |              |
|              |              |


## 01. Select version



### ELI 50 Spot / E 1




#### PB - Shiny reflector - 20°



CO - C180 —  
C90 - C270 —

| W | lm output | lm/W | mA  | Ø   | CODE*           |
|---|-----------|------|-----|-----|-----------------|
| 5 | 747       | 149  | 150 | Ø50 | 90703L0010♣0♦20 |
| 9 | 1168      | 130  | 250 | Ø50 | 90702L0010♣0♦20 |

#### PB - Shiny reflector - 50°



CO - C180 —  
C90 - C270 —

| W | lm output | lm/W | mA  | Ø   | CODE*           |
|---|-----------|------|-----|-----|-----------------|
| 5 | 724       | 145  | 150 | Ø50 | 90703L0010♣0♦50 |
| 9 | 1144      | 127  | 250 | Ø50 | 90702L0010♣0♦50 |

\*Replace the symbols to complete the code

| Colour  | ♣ |
|---------|---|
| □ White | W |
| ■ Black | B |

| Colour temp. | ♦ |
|--------------|---|
| 3000K        | 3 |
| 4000K        | 0 |

### ELI 50 Spot / E 1

• To complete the product add the control gear. Please order separately.

## 02. Select options



### Product details

#### OPTIONS

| Control gear HF                     | Code    |
|-------------------------------------|---------|
| Driver 6,3W 10-42V 150mA HF         | 900000E |
| Driver 10,5W 10-42V 250mA HF        | 900002E |
| Control gear dimmable DALI          |         |
| Driver 7,8W 09-52V 150mA DALI+ PUSH | 900100H |
| Driver 13W 09-52V 250mA DALI+ PUSH  | 900102H |
| Steel safety cable                  |         |
| L1500 mm                            | 955010  |



90° tilt + 355° rotation

# ELI 50 Spot /E 2




## Product characteristics

|                                                          |
|----------------------------------------------------------|
| <b>Body</b><br>Aluminium                                 |
| <b>Finish</b><br>Powder coated                           |
| <b>Optical system</b><br>PB - Shiny reflector            |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3 |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C       |
| <b>Control gear</b><br>Not included                      |
| <b>Ceiling thickness</b><br>For ceilings between 1-25 mm |


|              |              |
|--------------|--------------|
|              |              |
|              | <b>IP 20</b> |
| <b>650°C</b> |              |
|              |              |

## 01. Select version

### ELI 50 Spot / E 2




#### PB - Shiny reflector - 20°



CO - C180  
C90 - C270

| W  | lm output | lm/W | mA  | Ø       | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1494      | 149  | 300 | Ø45x105 | 90703L0020▲0♦20 |
| 17 | 2336      | 137  | 500 | Ø45x105 | 90702L0020▲0♦20 |

#### PB - Shiny reflector - 50°



CO - C180  
C90 - C270

| W  | lm output | lm/W | mA  | Ø       | CODE*           |
|----|-----------|------|-----|---------|-----------------|
| 10 | 1448      | 145  | 300 | Ø45x105 | 90703L0020▲0♦50 |
| 17 | 2288      | 135  | 500 | Ø45x105 | 90702L0020▲0♦50 |

### ELI 50 Spot / E 2

• To complete the product add the control gear. Please order separately.



\*Replace the symbols to complete the code

| Colour  | ▲ |
|---------|---|
| □ White | W |
| ■ Black | B |

| Colour temp. | ♦ |
|--------------|---|
| 3000K        | 3 |
| 4000K        | 0 |

## 02. Select options

### OPTIONS Code

#### Control gear HF

|                              |         |
|------------------------------|---------|
| Driver 12,6W 10-42V 300mA HF | 900003E |
| Driver 21W 10-42V 500mA HF   | 900007E |

#### Control gear dimmable DALI

|                                      |         |
|--------------------------------------|---------|
| Driver 15,6W 09-52V 300mA DALI+ PUSH | 900103H |
| Driver 26W 09-52V 500mA DALI+ PUSH   | 900107H |

#### Steel safety cable

|          |        |
|----------|--------|
| L1500 mm | 955010 |
|----------|--------|



### Product details



90° tilt + 355° rotation

ELI 50 Spot /C



Product  
characteristics

|                                                             |
|-------------------------------------------------------------|
| <b>Body</b><br>Aluminium                                    |
| <b>Finish</b><br>Powder coated                              |
| <b>Optical system</b><br>PB - Shiny reflector               |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |

|           |                   |        |
|-----------|-------------------|--------|
| CE        | RoHS<br>COMPLIANT | ⏏      |
| 230V/50Hz | IP 20             |        |
| 650°C     | ↻ 90°             | ↻ 355° |

01. Select version



| ELI 50 Spot /C                    |                                   |                     |                                 |                                                    |
|-----------------------------------|-----------------------------------|---------------------|---------------------------------|----------------------------------------------------|
|                                   | <b>PB - Shiny reflector - 20°</b> |                     |                                 |                                                    |
|                                   |                                   | <b>W</b><br>7<br>11 | <b>lm output</b><br>747<br>1168 | <b>lm/W</b><br>107<br>106                          |
|                                   |                                   |                     |                                 | <b>CODE*</b><br>90701L100♥♣0♦20<br>90700L100♥♣0♦20 |
| <b>PB - Shiny reflector - 50°</b> |                                   |                     |                                 |                                                    |
|                                   |                                   | <b>W</b><br>7<br>11 | <b>lm output</b><br>724<br>1144 | <b>lm/W</b><br>103<br>104                          |
|                                   |                                   |                     |                                 | <b>CODE*</b><br>90701L100♥♣0♦50<br>90700L100♥♣0♦50 |

\*Replace the symbols to complete the code

|                     |   |
|---------------------|---|
| <b>Control gear</b> | ♥ |
| HF                  | E |
| DALI                | H |

|               |   |
|---------------|---|
| <b>Colour</b> | ♣ |
| □ White       | W |
| ■ Black       | B |

|                     |   |
|---------------------|---|
| <b>Colour temp.</b> | ♦ |
| 3000K               | 3 |
| 4000K               | 0 |

Product details



90° tilt + 355° rotation

# ELI 50 Spot Track



## Product characteristics

|                                                             |
|-------------------------------------------------------------|
| <b>Body</b><br>Aluminium                                    |
| <b>Finish</b><br>Powder coated                              |
| <b>Optical system</b><br>PB - Shiny reflector               |
| <b>Light source</b><br>LED, RG1, CRI>90, MacAdam Step ≤3    |
| <b>LED lifetime</b><br>60.000h @ L80, B10, Ta 25°C          |
| <b>Control gear</b><br>LED driver 220-240V-50/60Hz included |

|           |       |  |
|-----------|-------|--|
|           |       |  |
| 230V/50Hz | IP 20 |  |
| 650°C     |       |  |

01. Select version



# ELI 50 Spot Track

## HF

Technical drawing of the HF track system showing dimensions: 158mm length, 169mm height, 100mm depth, and Ø50mm diameter.

## PB - Shiny reflector - 20°

Beam spread diagram for PB - Shiny reflector - 20°. The diagram shows a 20° beam angle with light distribution curves for C0-C180 (solid line) and C90-C270 (dashed line). The diagram includes a scale from 0 to 4000 and a legend indicating C0-C180 (solid line) and C90-C270 (dashed line).

**W**  
7  
11

**lm output**  
747  
1168

**lm/W**  
106  
106

**CODE\***  
90699L100H♣0♦20  
90698L100♥♣0♦20

## DALI

Technical drawing of the DALI track system showing dimensions: 255mm length, 169mm height, 100mm depth, and Ø50mm diameter.

## PB - Shiny reflector - 50°

Beam spread diagram for PB - Shiny reflector - 50°. The diagram shows a 50° beam angle with light distribution curves for C0-C180 (solid line) and C90-C270 (dashed line). The diagram includes a scale from 0 to 1500 and a legend indicating C0-C180 (solid line) and C90-C270 (dashed line).

**W**  
7  
11

**lm output**  
724  
1144

**lm/W**  
103  
104

**CODE\***  
90699L100H♣0♦50  
90698L100♥♣0♦50

\*Replace the symbols to complete the code


|                     |   |
|---------------------|---|
| <b>Control gear</b> | ♥ |
| HF                  | E |
| DALI                | H |
| <b>Colour</b>       | ♣ |
| □ White             | W |
| ■ Black             | B |
| <b>Colour temp.</b> | ♦ |
| 3000K               | 3 |
| 4000K               | 0 |

02. Select options



Product details

| OPTIONS             |  |
|---------------------|--|
| <b>Track system</b> |  |
| • See page 800.     |  |



90° tilt + 355° rotation      Finishing in White



