



Architectural
lighting

ELI



ELI /E 1
328




ELI /E 2
330



ELI Sq /E 1
332




ELI Sq /E 2
334



ELI
338



ELI Sq
340



ELI /C
342



ELI Sq /C
344



ELI /W
348



ELI Sq /W
350



ELI /W D/I
352




ELI Sq /W D/I
354



Application types



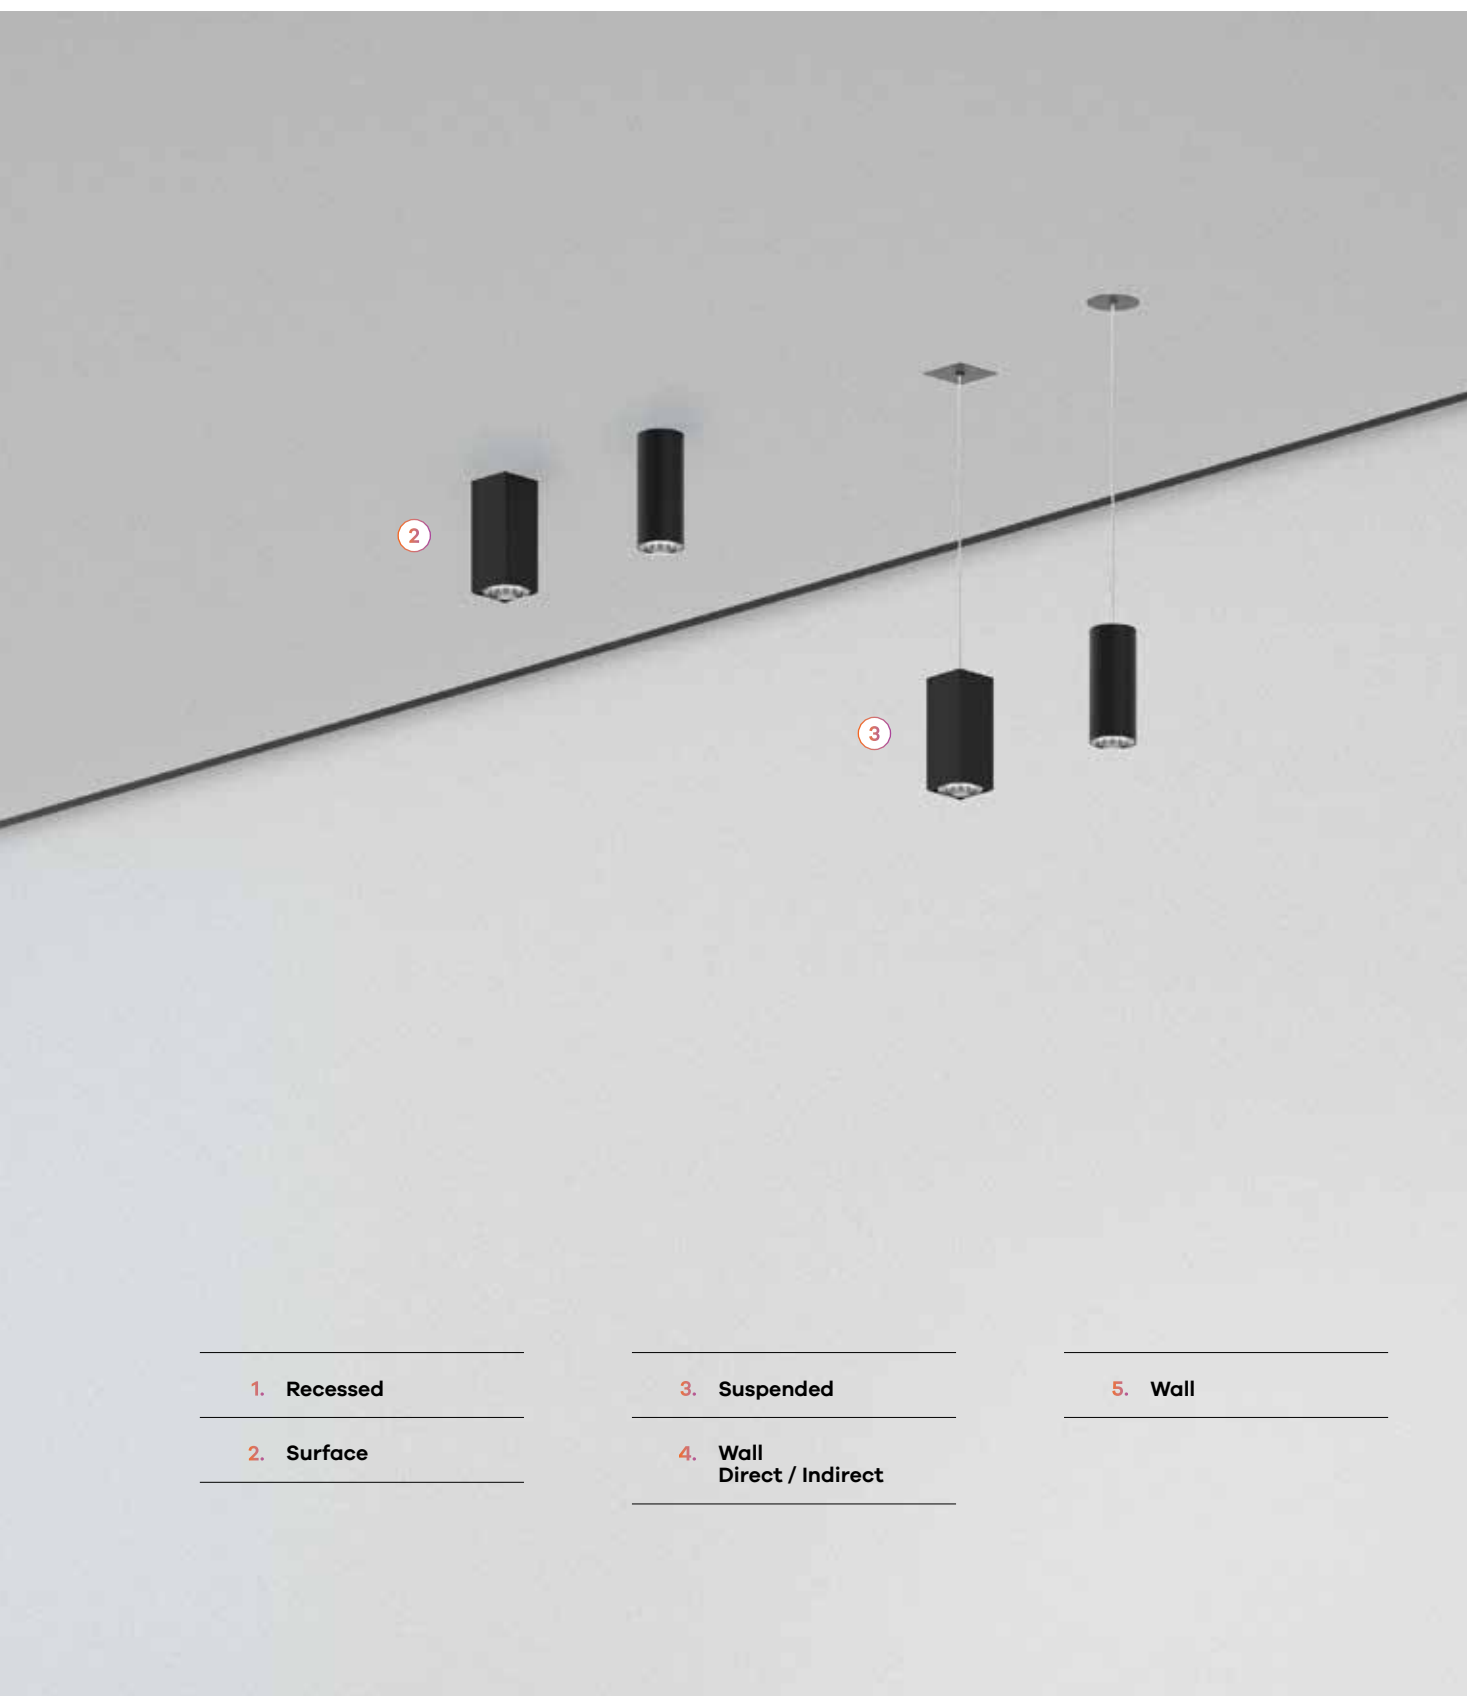

ELI /E 1



Product
characteristics


Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear Not included
Ceiling thickness For ceilings between 1-25 mm




01. Select version



ELI / E 1




PB - Shiny reflector - 35°



CO - C180
C90 - C270

UGR	W	lm output	lm/W	mA	Ø	CODE*
≤19	5	706	141	150	Ø95	90661L0010▲0♦35
≤19	8	1161	145	250	Ø95	90654L0010▲0♦35

PB - Shiny reflector - 60°



CO - C180
C90 - C270

UGR	W	lm output	lm/W	mA	Ø	CODE*
≤22	5	706	141	150	Ø95	90661L0010▲0♦60
≤22	8	1161	145	250	Ø95	90654L0010▲0♦60

*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

Colour temp.	♦
3000K	3
4000K	0

ELI / E 1

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS Code

Control gear HF

Driver 6,3W 10-42V 150mA HF	900000E
Driver 10,5W 10-42V 250mA HF	900002E

Control gear dimmable DALI

Driver 7,8W 09-52V 150mA DALI+ PUSH	900100H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H

Steel safety cable

L1500 mm	955010
----------	--------

ELI /E 2




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear Not included
Ceiling thickness For ceilings between 1-25 mm


01. Select version



ELI /E 2



PB - Shiny reflector - 35°




UGR	W	Im output	Im/W	mA		CODE*
≤19	10	1411	141	300	Ø95x195	90661L0020♣0♣35
≤19	16	2322	145	500	Ø95x195	90654L0020♣0♣35

***Replace the symbols to complete the code**

Colour	
 White	W
 Black	B

Colour temp.	◆
3000K	3
4000K	0

PB - Shiny reflector - 60°



UGR	W	Im output	Im/W	mA		CODE*
≤22	10	1411	141	300	Ø95x195	90661L0020♣♠♠♠
≤22	16	2322	145	500	Ø95x195	90654L0020♣♠♠♠

ELI /E 2

- To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS	Code
---------	------

Control gear HF

Driver 12,6W 10-42V 300mA HF	900003E
Driver 21W 10-42V 500mA HF	900007E

Control gear dimmable DALI

Driver 15,6W 09-52V 300mA DALI+ PUSH	900103H
Driver 26W 09-52V 500mA DALI+ PUSH	900107H

Steel safety cable

L1500 mm	955010
----------	--------

ELI Sq /E 1



Product characteristics


Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear Not included	
Ceiling thickness For ceilings between 1-25 mm	




01. Select version



ELI Sq /E 1



PB - Shiny reflector - 35°



CO - C180
C90 - C270


UGR	W	lm output	lm/W	mA	Ø	CODE*
≤19	5	706	141	150	Ø95	90673L0010▲0◆35
≤19	8	1161	145	250	Ø95	90655L0010▲0◆35

*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

Colour temp.	◆
3000K	3
4000K	0

PB - Shiny reflector - 60°



CO - C180
C90 - C270

UGR	W	lm output	lm/W	mA	Ø	CODE*
≤22	5	706	141	150	Ø95	90673L0010▲0◆60
≤22	8	1161	145	250	Ø95	90655L0010▲0◆60

ELI Sq /E 1

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS Code

Control gear HF

Driver 6,3W 10-42V 150mA HF	900000E
Driver 10,5W 10-42V 250mA HF	900002E

Control gear dimmable DALI

Driver 7,8W 09-52V 150mA DALI+ PUSH	900100H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H

Steel safety cable

L1500 mm	955010
----------	--------

ELI Sq /E 2




Product characteristics

Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear Not included
Ceiling thickness For ceilings between 1-25 mm


01. Select version



ELI Sq /E 2



PB - Shiny reflector - 35°




CO - C180

C90 - C270

UGR	W	lm output	lm/W	mA	Ø95x195	Ø95x195	CODE*
≤19	10	1411	141	300	Ø95x195	Ø95x195	90673L0020▲0♦35
≤19	16	2322	145	500	Ø95x195	Ø95x195	90655L0020▲0♦35

PB - Shiny reflector - 60°



CO - C180

C90 - C270

UGR	W	lm output	lm/W	mA	Ø95x195	Ø95x195	CODE*
≤22	10	1411	141	300	Ø95x195	Ø95x195	90673L0020▲0♦60
≤22	16	2322	145	500	Ø95x195	Ø95x195	90655L0020▲0♦60

*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

Colour temp.	♦
3000K	3
4000K	0

ELI Sq /E 2

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS Code

Control gear HF

Driver 12,6W 10-42V 300mA HF	900003E
Driver 21W 10-42V 500mA HF	900007E

Control gear dimmable DALI

Driver 15,6W 09-52V 300mA DALI+ PUSH	900103H
Driver 26W 09-52V 500mA DALI+ PUSH	900107H

Steel safety cable

L1500 mm	955010
----------	--------








Product
characteristics

Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	


CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	

01. Select version

ELI




PB - Shiny reflector - 35°



UGR	W	lm output	lm/W	CODE*
≤19	6	706	118	90671L200♥♣0♦35
≤19	9	1161	129	90564L200♥♣0♦35

PB - Shiny reflector - 60°



UGR	W	lm output	lm/W	CODE*
≤22	6	706	118	90671L200♥♣0♦60
≤22	9	1161	129	90564L200♥♣0♦60



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour	♣
□ White	W
■ Black	B

Colour temp.	♦
3000K	3
4000K	0

ELI

• To complete the product add the current supply cable and the ceiling rose. Please order separately.

02. Select options



OPTIONS Code*

Transparent current supply cable

L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507

Round ceiling rose

Surface T24 D95	45 l		Ø95	978600♣
Recessed T5 D90	33 l		Ø90	971300♣

*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Black	B



Product details



Ceiling rose

ELI Sq




Product
characteristics

Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	


CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	

01. Select version

ELI Sq




PB - Shiny reflector - 35°



UGR	W	lm output	lm/W	CODE*
≤19	6	706	118	90676L200♥♣0♦35
≤19	9	1161	129	90566L200♥♣0♦35

PB - Shiny reflector - 60°



UGR	W	lm output	lm/W	CODE*
≤22	6	706	118	90676L200♥♣0♦60
≤22	9	1161	129	90566L200♥♣0♦60



*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Colour	♣
□ White	W
■ Black	B

Colour temp.	♦
3000K	3
4000K	0

ELI Sq

• To complete the product add the current supply cable and the ceiling rose. Please order separately.

02. Select options



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Black	B

OPTIONS Code*

Transparent current supply cable


L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507

Square ceiling rose

Surface T25 Q100	45  100	978610♣
Recessed T7 Q90	Ø70 35  90	971400♣



Product details



Ceiling rose

ELI /C



Product
characteristics


Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	


01. Select version



ELI /C




PB - Shiny reflector - 35°



UGR	W	lm output	lm/W	CODE*
≤19	6	706	118	90347L200▼▲0◆35
≤19	9	1161	129	90596L200▼▲0◆35

PB - Shiny reflector - 60°



UGR	W	lm output	lm/W	CODE*
≤22	6	706	118	90347L200▼▲0◆60
≤22	9	1161	129	90596L200▼▲0◆60

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour	▲
□ White	W
■ Black	B

Colour temp.	◆
3000K	3
4000K	0

ELI Sq /C



Product
characteristics


Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	


01. Select version



ELI Sq /C



PB - Shiny reflector - 35°



UGR	W	Im output	Im/W	CODE*
≤ 19	6	706	118	90672L200♥♠0♣35
≤ 19	9	1161	129	90598L200♥♠0♣35

CODE*

90672L200♥♠0♦35

90598L200♥♠0♦35

***Replace the symbols to complete the code**

Control

gear

HF E


Colour



☐ White	W
--------------------------------	---

☐ White W
☒ Black B

PB - Shiny reflector - 60°



UGR	W	Im output	Im/W	CODE*
≤22	6	706	118	90672L200♥♠♣♦60
≤22	9	1161	129	90598L200♥♠♣♦60

CODE*

90672L200♥♠0♦60

90598L200♥♠0♦60

Colour temp. ◆

Colour temp.	✓
3000K	3

4000K 0







Product
characteristics


Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	


01. Select version



ELI /W



PB - Shiny reflector - 35°



W
6
9

lm
output
706
1161

lm/W
118
129


CODE*
90670L150▼▲0◆35
90646L150▼▲0◆35

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W
■ Black B

PB - Shiny reflector - 60°



W
6
9

lm
output
706
1161

lm/W
118
129

CODE*
90670L150▼▲0◆60
90646L150▼▲0◆60

Colour temp. ◆
3000K 3
4000K 0

ELI Sq /W



Product
characteristics


Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	


01. Select version



ELI Sq /W



PB - Shiny reflector - 35°



W
6
9

lm
output
706
1161

lm/W
118
129


CODE*
90675L150▼▲0◆35
90648L150▼▲0◆35

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W
■ Black B

PB - Shiny reflector - 60°



W
6
9

lm
output
706
1161

lm/W
118
129

CODE*
90675L150▼▲0◆60
90648L150▼▲0◆60

Colour temp. ◆
3000K 3
4000K 0

ELI /W D/I



Product
characteristics


Body Aluminium	
Finish Powder coated	
Optical system PB - Shiny reflector	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 50.000h @ L90, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 20
650°C	


01. Select version



ELI /W D/I



PB - Shiny reflector - 35°



W
10

lm
output
1258

lm/W
126


CODE*
90651L200▼▲0◆35

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W
■ Black B

PB - Shiny reflector - 60°



W
10

lm
output
1244

lm/W
124

CODE*
90651L200▼▲0◆60

Colour temp. ◆
3000K 3
4000K 0

ELI Sq /W D/I



Product
characteristics


Body Aluminium
Finish Powder coated
Optical system PB - Shiny reflector
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏏	IP 20
650°C	


01. Select version



ELI Sq /W D/I



PB - Shiny reflector - 35°



W
10

lm
output
1258

lm/W
126


CODE*
90653L200▼▲0◆35

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W
■ Black B

PB - Shiny reflector - 60°



W
10

lm
output
1244

lm/W
124

CODE*
90653L200▼▲0◆60

Colour temp. ◆
3000K 3
4000K 0



