




HOLI



HOLI Sq /T Mini
388



HOLI Sq /T
390




HOLI Sq /T Max
392



HOLI Sq Mini
396



HOLI Sq
398



HOLI Sq Max
400



HOLI Sq /AS Max
404



HOLI Sq /C Mini
406



HOLI Sq /C
408



HOLI Sq /C Max
410



HOLI Sq /T Mini



Product characteristics


Body Steel sheet
Finish Powder coated
Fixing system Trimless mounting kit
Optical system PRISM+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 60.000h @ L70, B10, Ta 25°C
Control gear Not included

CE	RoHS
230V/50Hz	
III	IP 40
650°C	10


01. Select version



HOLI Sq /T Mini



PRISM+ - Microprismatic diffuser



C0 - C180

C180 - C270


W	lm output	lm/W	mA	Beam	CODE*
7	759	115	200	101x101	90222L1070 $\blacktriangle$ 0 $\blacklozenge$ 00

*Replace the symbols to complete the code

Colour	
☐ White	W
☒ Black	B

Colour temp.	
3000K	3
4000K	0

LIGHT+ - Opal diffuser



C0 - C180

C180 - C270

W	lm output	lm/W	mA	Beam	CODE*
7	837	120	200	101x101	90267L1070 $\blacktriangle$ 0 $\blacklozenge$ 00

HOLI Sq /T Mini

• To complete the product add the control gear and trimless mounting kit. Please order separately.

02. Select options



Product details

OPTIONS Code

Control gear HF


Driver 8,4W 10-42V 200mA HF 900001E

Control gear dimmable DALI

Driver 10,4W 09-52V 200mA DALI+ PUSH 900101H

Trimless mounting kit

White 971500



Steel safety cable

L1500 mm 955000



Finish in white colour



Finish in black colour

HOLI Sq /T



Product characteristics


Body Steel sheet
Finish Powder coated
Fixing system Trimless mounting kit
Optical system PRISM+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 60.000h @ L70, B10, Ta 25°C
Control gear Not included

CE	RoHS
230V/50Hz	
III	IP 40
650°C	WEEE


01. Select version



HOLI Sq /T




PRISM+ - Microprismatic diffuser



W	Im output	Im/W	mA		CODE*
7	748	107	200	114x114	90223L1060 $\blacklozenge$ 00
8	927	116	250	114x114	90223L1100 $\blacklozenge$ 00

C0 - C180 —
C90 - C270 — —

LIGHT+ - Opal diffuser



W	Im output	Im/W	mA		CODE*
7	826	118	200	114x114	90272L1060 $\blacklozenge$ 00
8	1023	128	250	114x114	90272L1100 $\blacklozenge$ 00

C0 - C180 —
C90 - C270 —

***Replace the symbols to complete the code**

Colour	
 White	W
 Black	B

Colour temp.	◆
3000K	3
4000K	0

HOLI Sq /T

- To complete the product add the control gear and trimless mounting kit. Please order separately.

02. Select options

OPTIONS

Code

Control gear HF


Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E

Control gear dimmable DALI

Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H

Trimless mounting kit

White 971501



Steel safety cable

Steel safety cable	
L1500 mm	955000



Product details



Finish in white colour



Finish in black colour

HOLI Sq /T Max



Product characteristics


Body
Steel sheet
Finish
Powder coated
Fixing system
Trimless mounting kit
Optical system
PRISM+ - Microprismatic diffuser
LIGHT+ - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
60.000h @ L70, B10, Ta 25°C
Control gear
Not included

CE	RoHS
230V/50Hz	
III	IP 40
650°C	10


01. Select version



HOLI Sq /T Max




PRISM+ - Microprismatic diffuser



W	Im output	Im/W	mA		CODE*
8	1010	126	250	155x155	90224L1100♠0♦00
12	1363	114	350	155x155	90224L1130♠0♦00
18	1900	106	500	155x155	90224L1170♠0♦00

LIGHT+ - Opal diffuser



W	Im output	Im/W	mA		CODE*
8	1120	140	250	155x155	90287L1100 $\blacklozenge$ 0 $\blacklozenge$ 00
12	1533	128	350	155x155	90287L1130 $\blacklozenge$ 0 $\blacklozenge$ 00
18	2082	116	500	155x155	90287L1170 $\blacklozenge$ 0 $\blacklozenge$ 00

***Replace the symbols to complete the code**

Colour	
White	W
Black	B

Colour temp.	◆
3000K	3
4000K	0

HOLI Sq /T Max

- To complete the product add the control gear and trimless mounting kit. Please order separately.

02. Select options



Product details

OPTIONS

Code

Control gear HF


Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E
Driver 21W 10-42V 500mA HF	900007E

Control gear dimmable DALI

Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H
Driver 26W 09-52V 500mA DALI+ PUSH	900107H

Trimless mounting kit

White



971502

Steel safety cable


Steel safety cable	
L1500 mm	955000



Finish in white colour



Finish in black colour

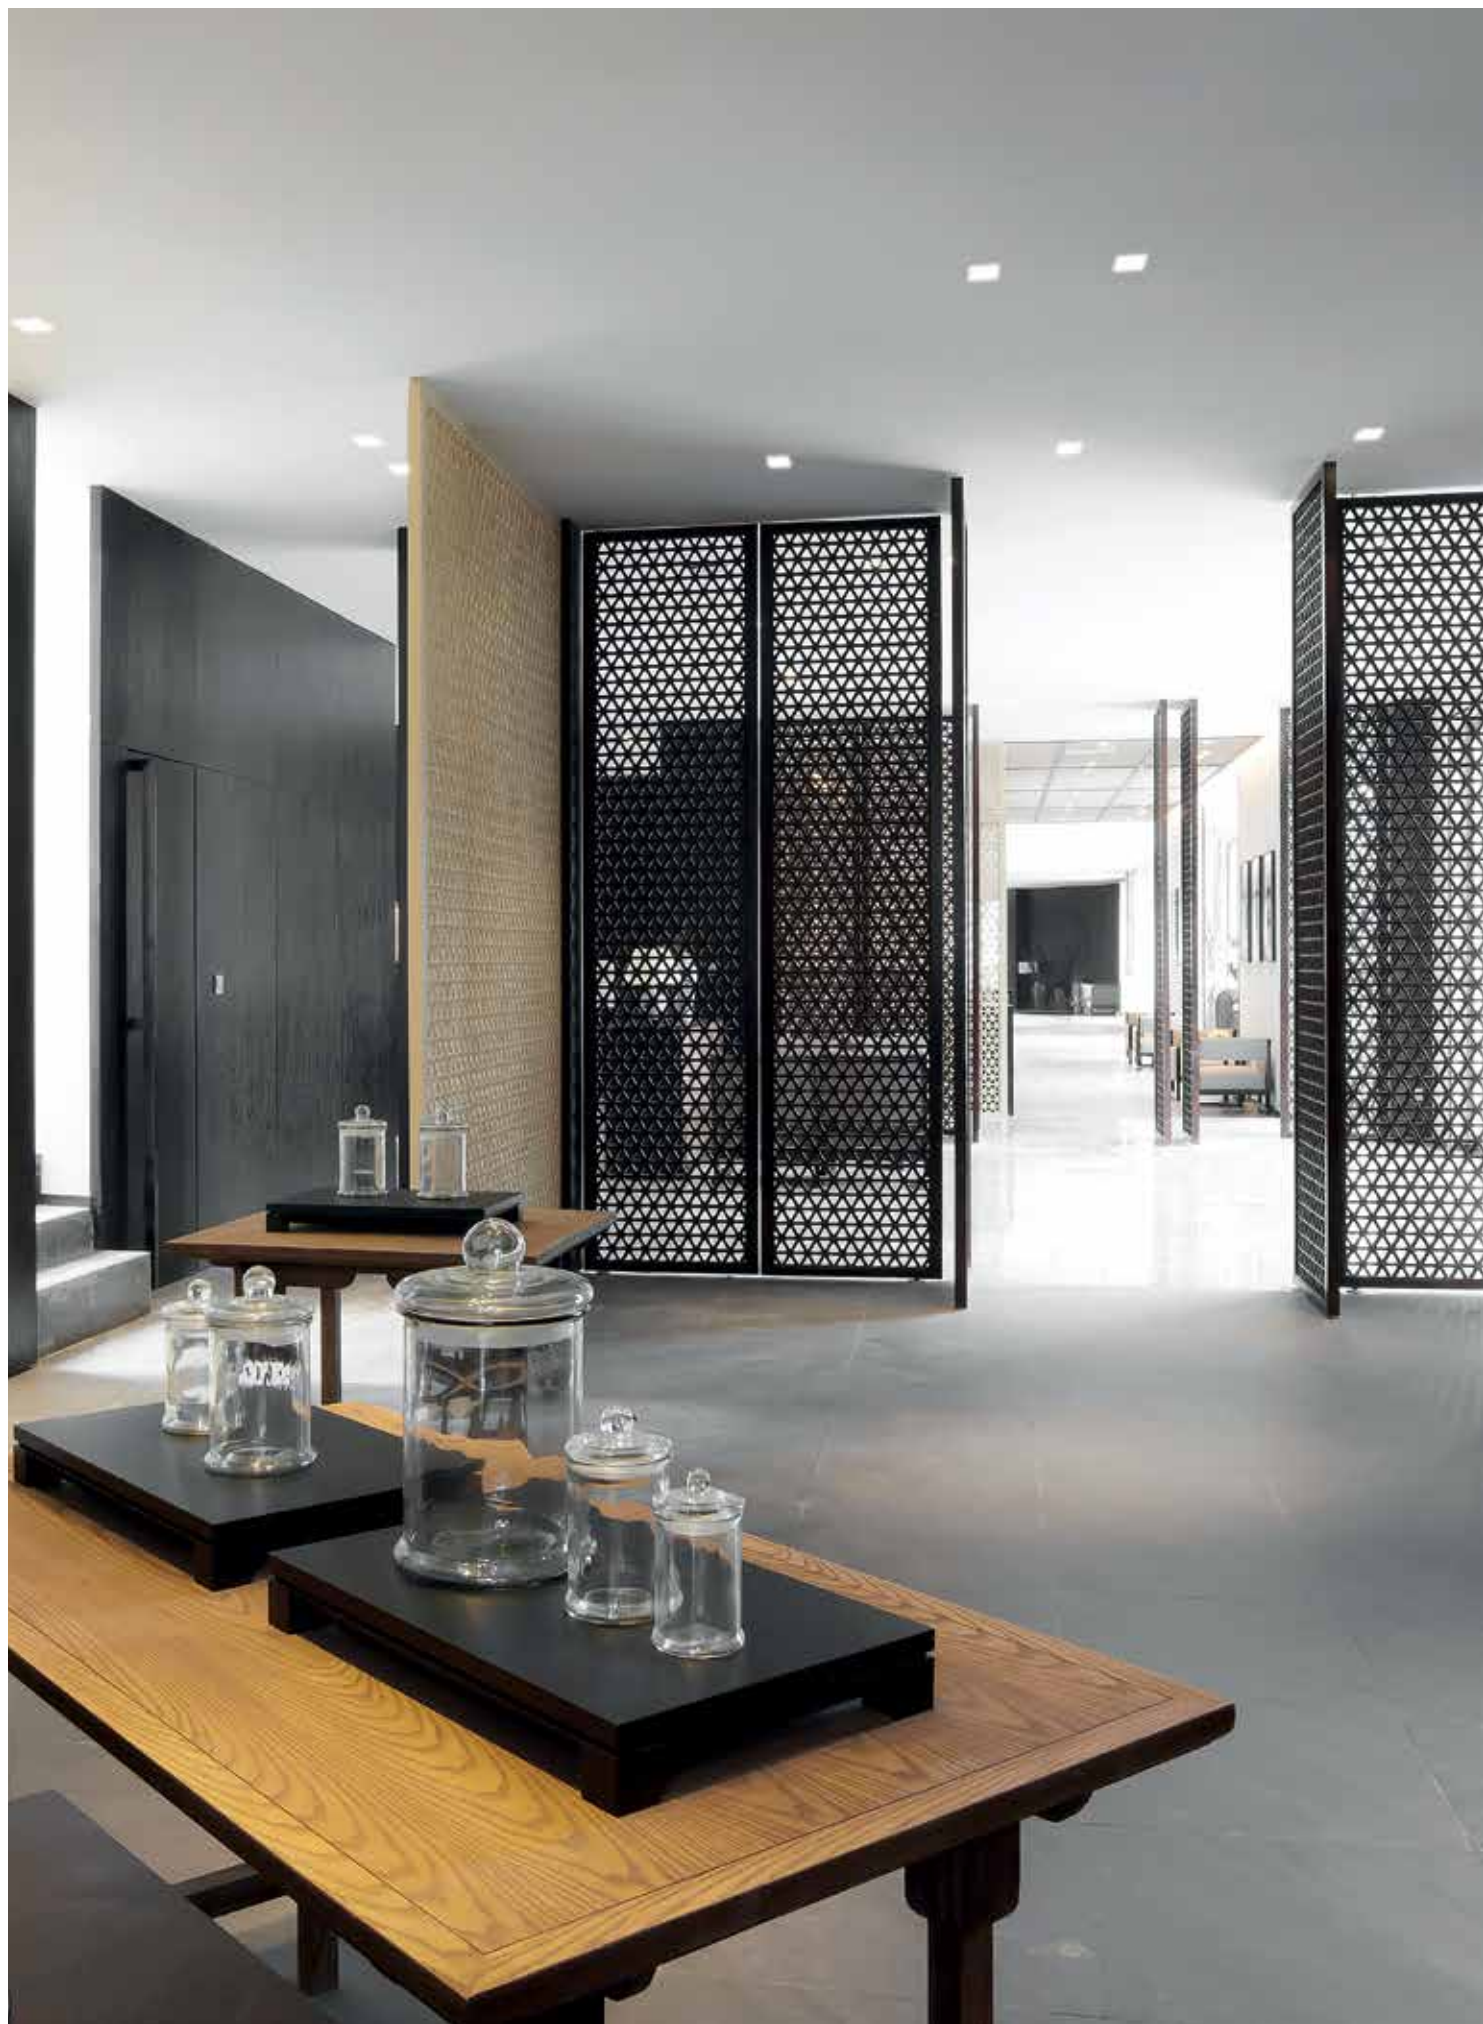



HOLI Sq Mini



Product characteristics


Body Steel sheet
Finish Powder coated
Optical system PRISM+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 60.000h @ L70, B10, Ta 25°C
Control gear Not included
Ceiling thickness For ceilings between 1-20 mm

CE	RoHS
230V/50Hz	
III	IP 40
650°C	10


01. Select version



HOLI Sq Mini




PRISM+ - Microprismatic diffuser



W	lm output	lm/W	mA	Size	CODE*
7	759	115	200	97x97	90258L1070 $\clubsuit$ 0 $\clubsuit$ 0

LIGHT+ - Opal diffuser



W	lm output	lm/W	mA	Size	CODE*
7	837	120	200	97x97	90293L1070 $\clubsuit$ 0 $\clubsuit$ 0

*Replace the symbols to complete the code

Colour	$\clubsuit$ / $\spadesuit$
☐ White	W/W
☐ Black	B/B
☐ White/Black	W/B



Subtitle:

1. Frame
2. Reflector

Colour temp.	$\spadesuit$
3000K	3
4000K	0

HOLI Sq Mini

• To complete the product add the control gear. Please order separately.

02. Select options



Product details

OPTIONS	Code
Control gear HF Driver 8,4W 10-42V 200mA HF	900001E
Control gear dimmable DALI Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Steel safety cable L1500 mm	955000



Finish in white colour



Finish in black colour



Finish in white/black colour

HOLI Sq




Product characteristics

Body Steel sheet
Finish Powder coated
Optical system PRISM+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 60.000h @ L70, B10, Ta 25°C
Control gear Not included
Ceiling thickness For ceilings between 1-20 mm


CE	RoHS
230V/50Hz	
III	IP 40
650°C	

01. Select version

HOLI Sq




PRISM+ - Microprismatic diffuser



CO-C180
C90-C270

W	lm output	lm/W	mA	Size	CODE*
7	748	107	200	115x115	90259L10600000
8	927	116	250	115x115	90259L11000000

LIGHT+ - Opal diffuser



CO-C180
C90-C270

W	lm output	lm/W	mA	Size	CODE*
7	826	118	200	115x115	90294L10600000
8	1023	128	250	115x115	90294L11000000



*Replace the symbols to complete the code

Colour	Symbol
White	W/W
Black	B/B
White/Black	W/B



Subtitle:

1. Frame
2. Reflector

Colour temp.	Symbol
3000K	3
4000K	0

HOLI Sq

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS	Code
Control gear HF	
Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E
Control gear dimmable DALI	
Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Steel safety cable	
L1500 mm	955000



Product details



Finish in white colour



Finish in black colour



Finish in white/black colour

HOLI Sq Max



Product characteristics

Body

Steel sheet

Finish

Powder coated

Optical system

PRISM+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime


60.000h @ L70, B10, Ta 25°C

Control gear

Not included

Ceiling thickness

For ceilings between 1-20 mm



01. Select version



*Replace the symbols to complete the code


Colour	☐/■
☐ White	W/W
■ Black	B/B
☐ White/ Black	W/B




Subtitle:
1. Frame
2. Reflector

Colour temp.	◆
3000K	3
4000K	0

HOLI Sq Max




PRISM+ - Microprismatic diffuser



W	lm output	lm/W	mA	Size	CODE*
8	1010	126	250	155x155	90264L1100◆0◆◆0
12	1363	114	350	155x155	90264L1130◆0◆◆0
18	1900	106	500	155x155	90264L1170◆0◆◆0

LIGHT+ - Opal diffuser



W	lm output	lm/W	mA	Size	CODE*
8	1120	140	250	155x155	90295L1100◆0◆◆0
12	1533	128	350	155x155	90295L1130◆0◆◆0
18	2082	116	500	155x155	90295L1170◆0◆◆0

HOLI Sq Max

• To complete the product add the control gear. Please order separately.

02. Select options



Product details

OPTIONS Code

Control gear HF	
Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E
Driver 21W 10-42V 500mA HF	900007E

Control gear dimmable DALI	
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H
Driver 26W 09-52V 500mA DALI+ PUSH	900107H

Steel safety cable	
L1500 mm	955000



Finish in white colour



Finish in black colour



Finish in white/black colour





HOLI Sq /AS Max



Product characteristics

Body Steel sheet	
Finish Powder coated	
Optical system LIGHT+ - Opal diffuser	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 60.000h @ L70, B10, Ta 25°C	
Control gear Not included	
Ceiling thickness For ceilings between 1-20 mm	

CE	RoHS
230V/50Hz	
III	IP 40
650°C	RoHS

01. Select version



HOLI Sq /AS Max

LIGHT+ - Opal diffuser

W	lm output	lm/W	mA	□	CODE*
7	792	113	200	155x155	90393L1060♦0♦♦0
12	1344	112	350	155x155	90393L1100♦0♦♦0

HOLI Sq /AS Max

• To complete the product add the control gear. Please order separately.

*Replace the symbols to complete the code

Colour ♦/♦

□ White	W/W
■ Black	B/B
▣ White/Black	W/B

1
2

Subtitle:
1. Frame
2. Reflector

Colour temp. ♦

3000K	3
4000K	0

02. Select options

OPTIONS	Code
Control gear HF	
Driver 8,4W 10-42V 200mA HF	900001E
Driver 14,7W 10-42V 350mA HF	900004E
Control gear dimmable DALI	
Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H
Steel safety cable	
L1500 mm	955000



Product details

Finish in white colour

Finish in black colour

Finish in white/black colour

HOLI Sq /C Mini



Product characteristics


Body Steel sheet	
Finish Powder coated	
Optical system LIGHT+ - Opal diffuser	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 60.000h @ L70, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 40
650°C	


01. Select version



HOLI Sq /C Mini



LIGHT+ - Opal diffuser



W
8

lm
output
930


lm/W
116

CODE*
90269L006▼♣0♦♣0

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W/W
■ Black B/B
▣ White/Black W/B



Subtitle:
1. Body
2. Reflector

Colour temp. ♦
3000K 3
4000K 0

HOLI Sq /C



Product
characteristics


Body
Steel sheet
Finish
Powder coated
Optical system
LIGHT+ - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
60.000h @ L70, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏚	IP 40
650°C	


01. Select version



HOLI Sq /C



LIGHT+ - Opal diffuser



W
8
14

lm
output
930
1576


lm/W
116
113

CODE*
90270L006♥♣0♦♣0
90270L110♥♣0♦♣0

*Replace the symbols to complete the code

Control gear
HF DALI
E H

Colour
□ White W/W
■ Black B/B
▣ White/Black W/B



Subtitle:
1. Body
2. Reflector

Colour temp.
3000K 3
4000K 0

HOLI Sq /C Max



Product characteristics


Body	
Steel sheet	
Finish	
Powder coated	
Optical system	
LIGHT+ - Opal diffuser	
Light source	
LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime	
60.000h @ L70, B10, Ta 25°C	
Control gear	
LED driver 220-240V-50/60Hz included	

CE	RoHS
230V/50Hz	
⏚	IP 40
650°C	


01. Select version



HOLI Sq /C Max



LIGHT+ - Opal diffuser



W
14
21
22

lm
output
1576
2166
2492

lm/W
113
103
113


CODE*

90291L110♥♣0♦♠0
90291L113♥♣0♦♠0
90291L117♥♣0♦♠0

*Replace the symbols to complete the code

Control gear
HF DALI
E H

Colour
□ White W/W
■ Black B/B
▣ White/Black W/B



Subtitle:
1. Body
2. Reflector

Colour temp.
3000K 3
4000K 0

