




Technical
lighting

LNE



LNE
646



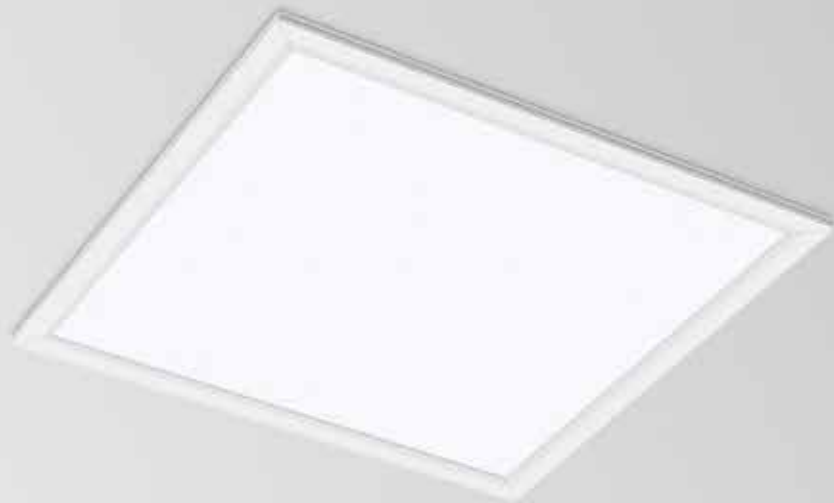

Product
characteristics


Body
Steel sheet
Frame
Aluminium
Finish
White matte powder coated
Fixing system
Pull-up: for plasterboard ceilings with brackets
Optical system
DAM - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L80, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included
Ceiling thickness
For ceilings between 1-25 mm

CE	RoHS
230V/50Hz	
⏏	IP 20/40
650°C	⚡


01. Select version



LNE




DAM - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	□	CODE*
≤19	26	3169	122	897x297	882x282	90827L063♥W●♣
≤19	34	4225	124	1197x297	1182x282	90827L123♥W●♣
≤19	42	5282	126	1497x297	1482x282	90827L153♥W●♣
≤19	34	4225	124	597x597	582x582	90827L066♥W●♣

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	□	CODE*
≤22	26	3441	132	897x297	882x282	90828L063♥W●♣
≤22	34	4587	135	1197x297	1182x282	90828L123♥W●♣
≤22	42	5734	137	1497x297	1482x282	90828L153♥W●♣
≤22	34	4587	135	597x597	582x582	90828L066♥W●♣

*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3

Colour temp.	♦
3000K	3
4000K	0

Connector	♣
No connector	00
W3M ²	W3
W5MD ³	W5

02. Select options



Product details

OPTIONS Code

CRI>90

- Under request.

Steel safety cable

L1500 mm	955000
----------	--------



Frame with click system

¹ Prepared for emergency remote control.

² 3-pole Wieland GST18i3 male connector.

³ 5-pole Wieland GST18i5 DIM male connector.