

RECEPTION



ROFY 60 SQ




ROFY 60 Sq
198



ROFY 60 Sq D/I
202



ROFY 60 Sq

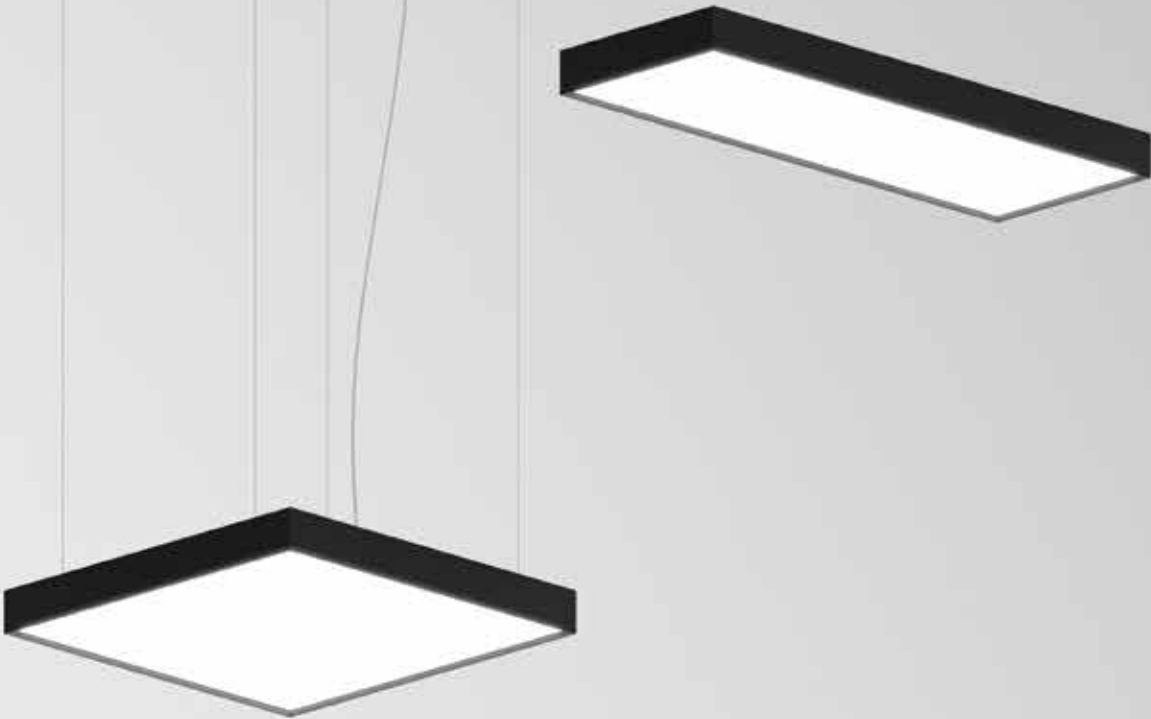


Product characteristics

Body Aluminium
Finish Powder coated
Optical system gCONTROL+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏚	IP 40
IK 04	650°C

01. Select version

ROFY 60 Sq




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤19	12	1478	123	286x286	90718L286▼▲0♦00
≤19	45	5913	131	550x550	90718L550▼▲♦♦00
≤19	25	2956	118	550x286	90718L552▼▲0♦00
≤19	36	4435	123	814x286	90718L812▼▲♦♦00
≤19	45	5913	131	1078x286	90718L102▼▲♦♦00
≤19	56	7391	132	1342x286	90718L132▼▲♦♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	12	1582	132	286x286	90720L286▼▲0♦00
≤22	45	6329	141	550x550	90720L550▼▲♦♦00
≤22	25	3165	127	550x286	90720L552▼▲0♦00
≤22	36	4747	132	814x286	90720L812▼▲♦♦00
≤22	45	6329	141	1078x286	90720L102▼▲♦♦00
≤22	56	7912	141	1342x286	90720L132▼▲♦♦00

ROFY 60 Sq

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White	T

¹ See page 164.

² Prepared for emergency remote control. Only available for the L550x550, L814, L1078 and L1342 mm versions.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	
Ceiling rose	
Surface mounted T25 45  100	978610♣
Surface mounted T29 (DALI+K3)	978611♣
Recessed T7  Ø70 35  90	971400♣
Recessed T59 (DALI+K3)	971410♣
Low Output version	
• Under request.	




*Replace the symbols to complete the code


Colour	♣
□ White	W
■ Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser




Outer parallel suspension



Ceiling roses



ROFY 60 Sq D/I

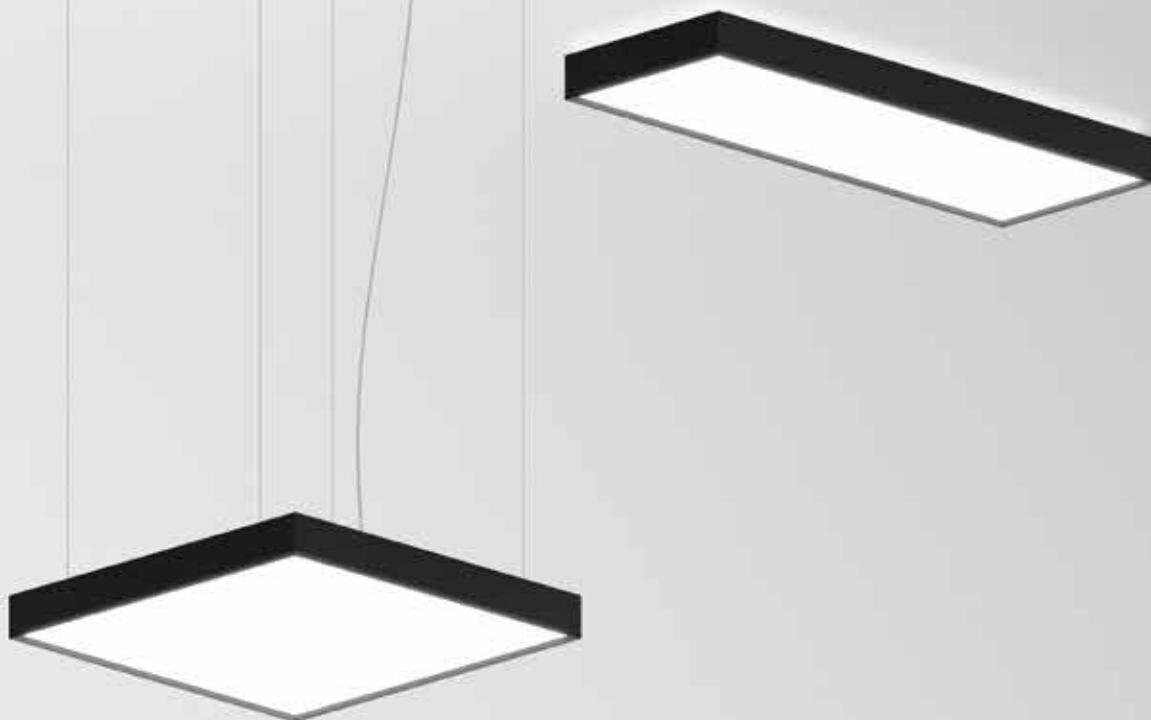

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40

IK 04


650°C

01. Select version

ROFY 60 Sq D/I




gCONTROL+ - Microprismatic diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤16	18	2231	124	286x286	90714L286▼▲0♦00
≤19	60	7753	129	550x550	90714L550▼▲♦♦♦00
≤19	33	3967	120	550x286	90714L552▼▲♦♦00
≤19	48	5963	124	814x286	90714L812▼▲♦♦♦00
≤19	60	7935	132	1078x286	90714L102▼▲♦♦♦00
≤19	75	9912	132	1342x286	90714L132▼▲♦♦♦00

LIGHT+ - Opal diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	18	2325	129	286x286	90716L286▼▲0♦00
≤22	60	8081	135	550x550	90716L550▼▲♦♦♦00
≤22	33	4135	125	550x286	90716L552▼▲♦♦00
≤22	48	6215	129	814x286	90716L812▼▲♦♦♦00
≤22	60	8270	138	1078x286	90716L102▼▲♦♦♦00
≤22	75	10330	138	1342x286	90716L132▼▲♦♦♦00

ROFY 60 Sq D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee total light uniformity on the ceiling in the suspended version, installation must be carried out at a minimum distance of 500 mm.



*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Colour ³	
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	
No EM	0
EM 3h (K3) ⁴	3

Colour temp.	
3000K	3
4000K	0
Tunable White	T

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ See page 164.

⁴ Prepared for emergency remote control. Only available for the L550x550, L814, L1078 and L1342 mm versions.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	
Ceiling rose	
Surface mounted T25 45  100	978610♣
Surface mounted T29 (DALI+K3)	978611♣
Recessed T7  Ø70 35  90	971400♣
Recessed T59 (DALI+K3)	971410♣
Low Output version	
• Under request.	




*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



Indirect light



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses

