




ROFY



ROFY 60 /T
166

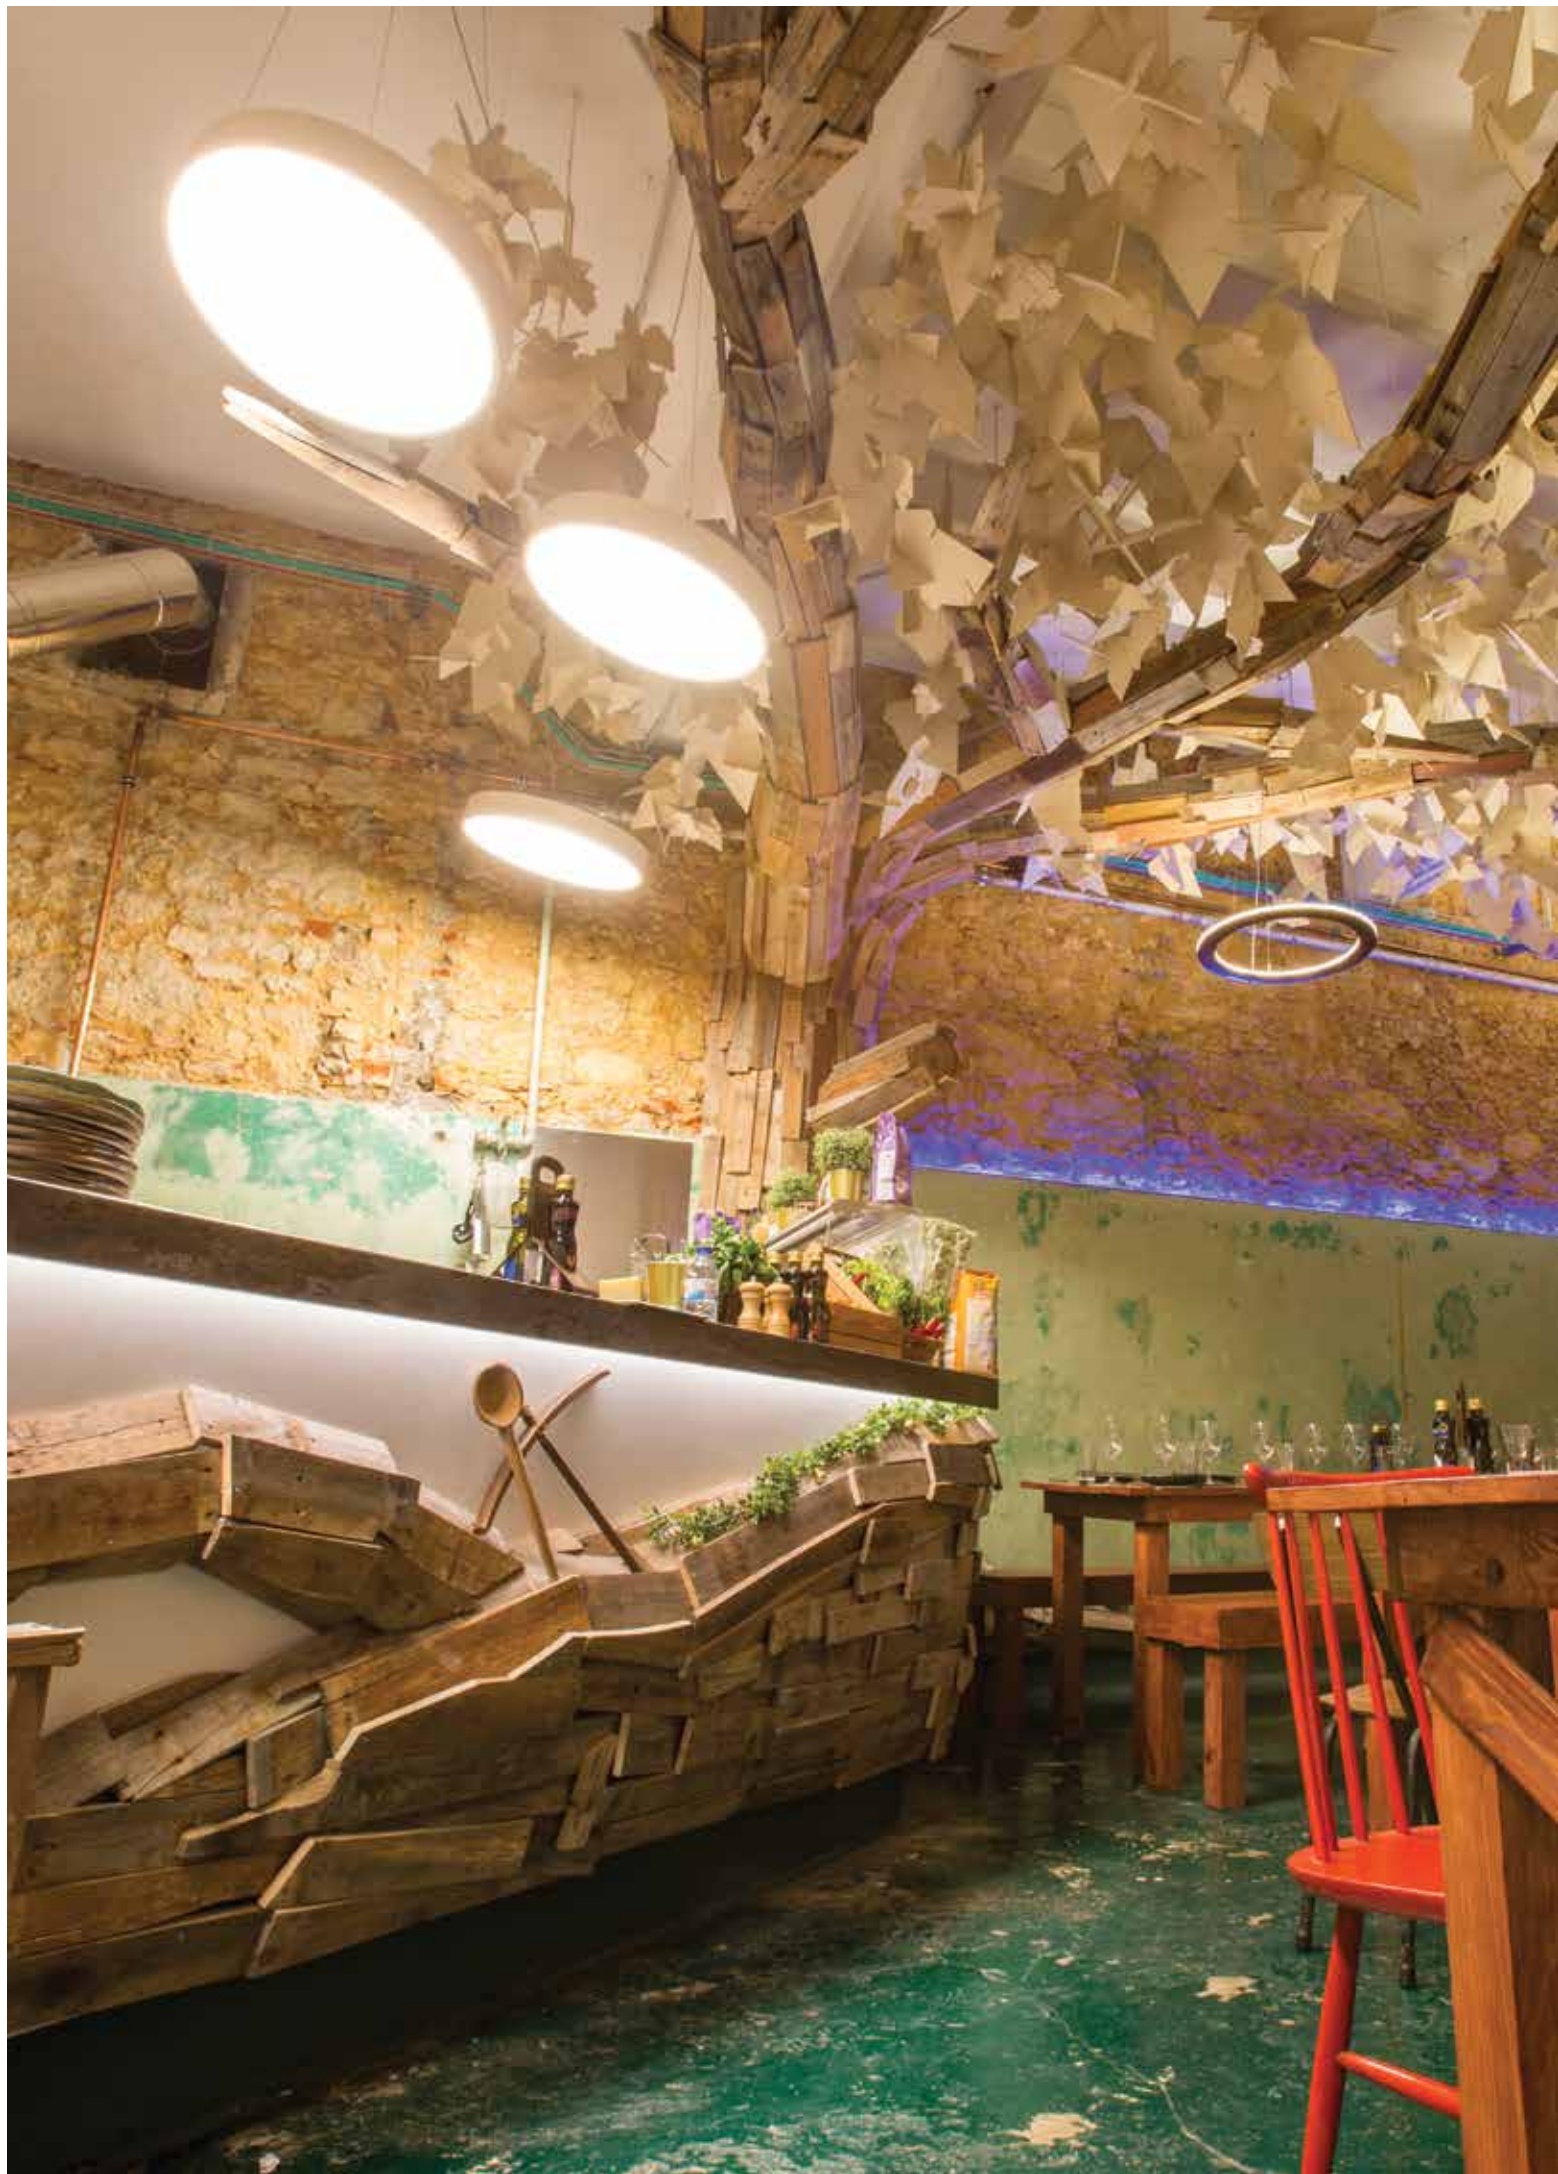

ROFY 60 /T D/I
168



ROFY 60
172



ROFY 60 D/I
176



ROFY 85 /E
180



ROFY 85
182



ROFY 85 D/I
186



ROFY 85 IP /E
190



ROFY 85 IP /C
192




Application types





Two available versions

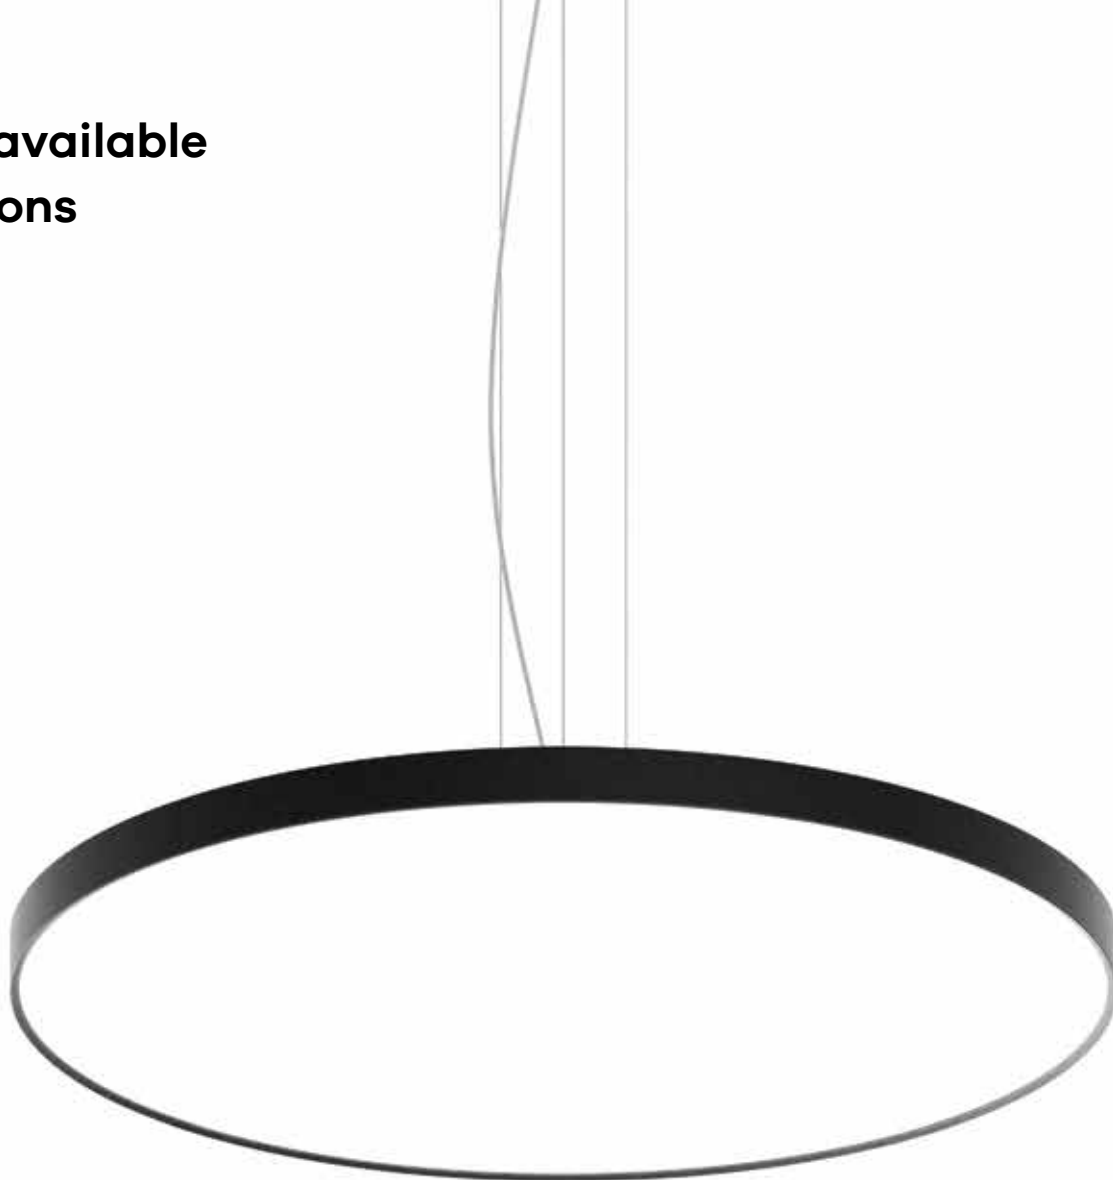

ROFY 60






ROFY 85





85 mm



1. gCONTROL+



2. LIGHT+

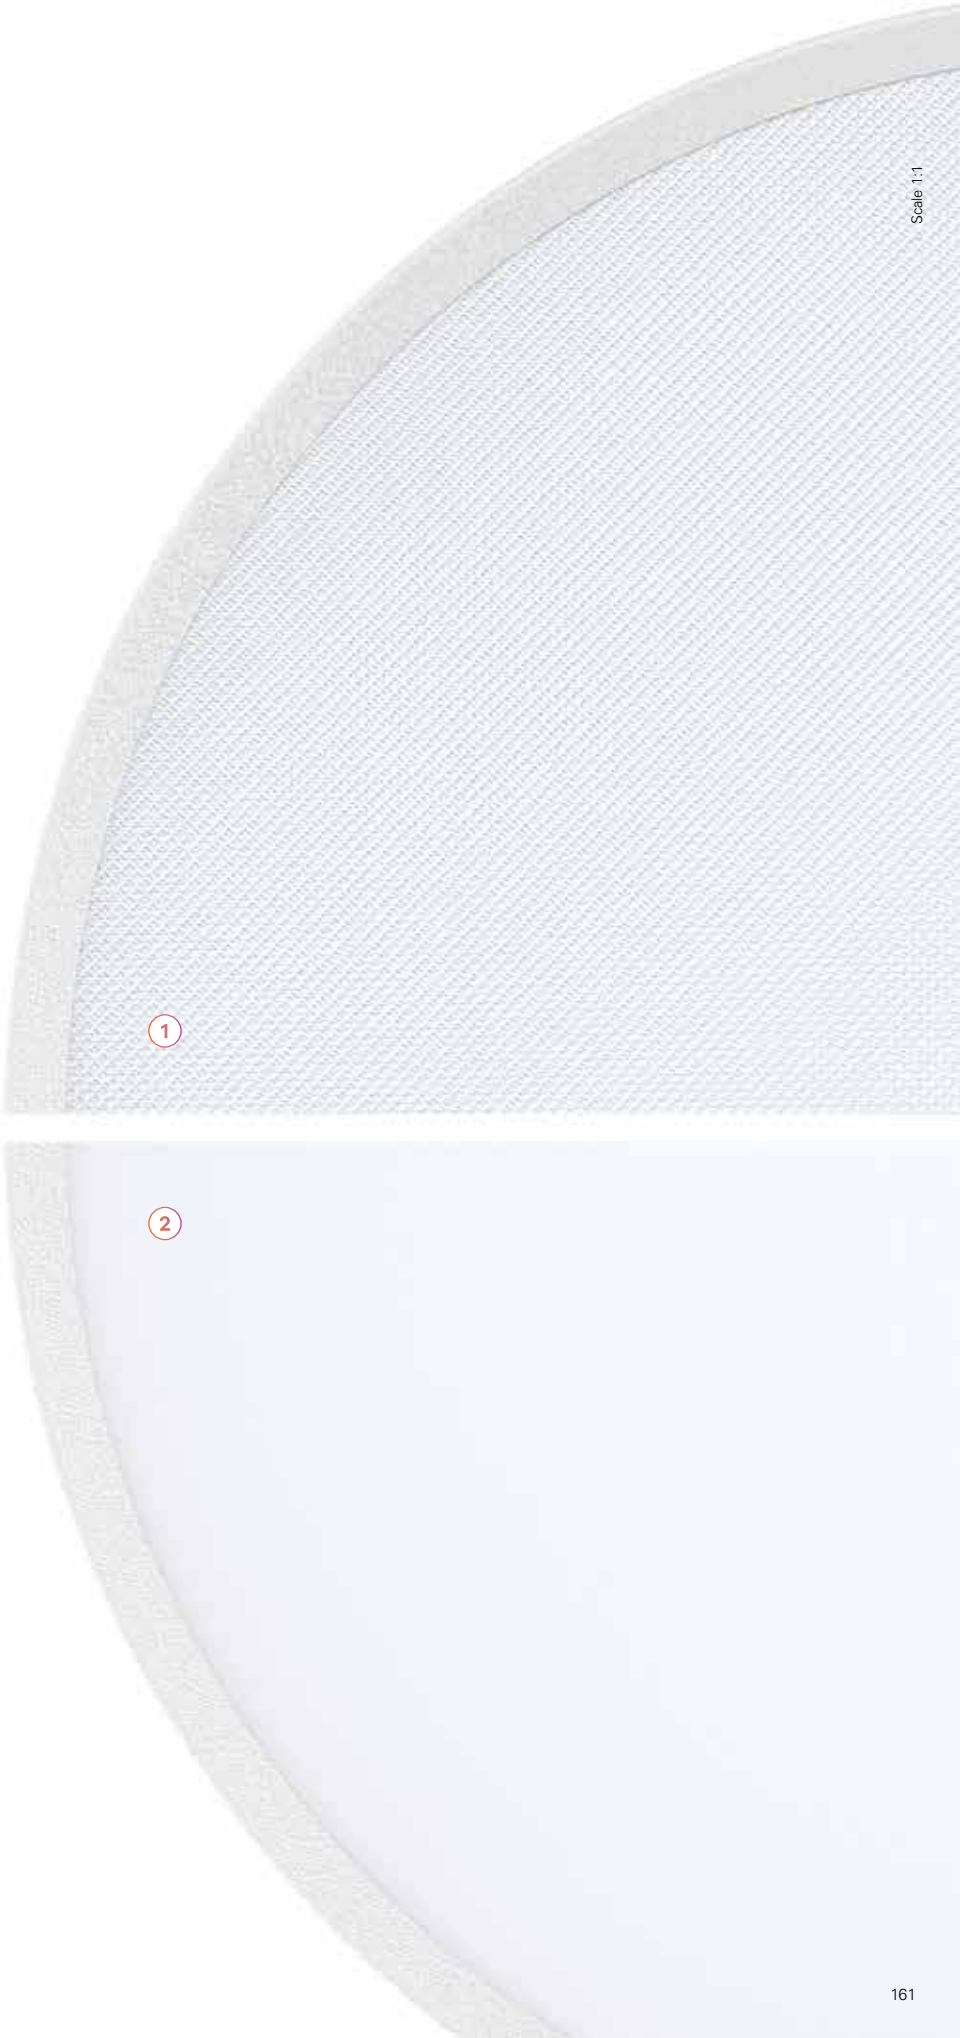

Minimalism and technology

1. Body

Seamlessly welded aluminium profile, available in 12 colours.

2. LED

SDCM MacAdam ≤ 3 , 3000K / 4000K colour temperature, CRI > 80 and 80.000h lifetime L90 B10.

3. Tunable White

Tunable White versions available with a white light spectrum from 2700K to 6500K. Available from Ø400 mm.



4. gCONTROL+ or LIGHT+

High-tech optical system with LIGHT+ opal version to ensure smooth and uniform light, or gCONTROL+ microprismatic version for high visual comfort (UGR < 19) and without visible spots).



5. HPR

Internal high-performance reflector to ensure high efficiency and smooth and uniform light.

6. Indirect light


Direct / indirect version with 80% / 20% light ratio and opal diffuser for light uniformity on the ceiling.



7. HF or dimmable DALI driver

8. Suspension and current supply cable

Thanks to a wide range of suspensions and ceiling roses, you can select a very minimalist and discrete suspension. The central suspension allows the luminaire to subtly integrate into any project. Suspensions and power cable available in 1500, 3000 or 6000 mm length.

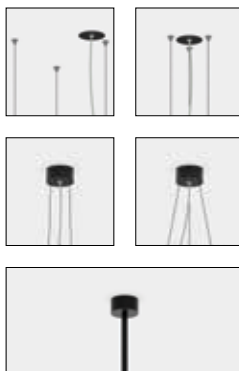

9. Ceiling rose

Recessed, surface mounted or central ceiling roses, available in white or black colour.




10. Emergency unit

3h emergency unit. Available from ≈ 600 to ≈ 1150 mm.

11. IP version





Available with water and dust protection index IP54.



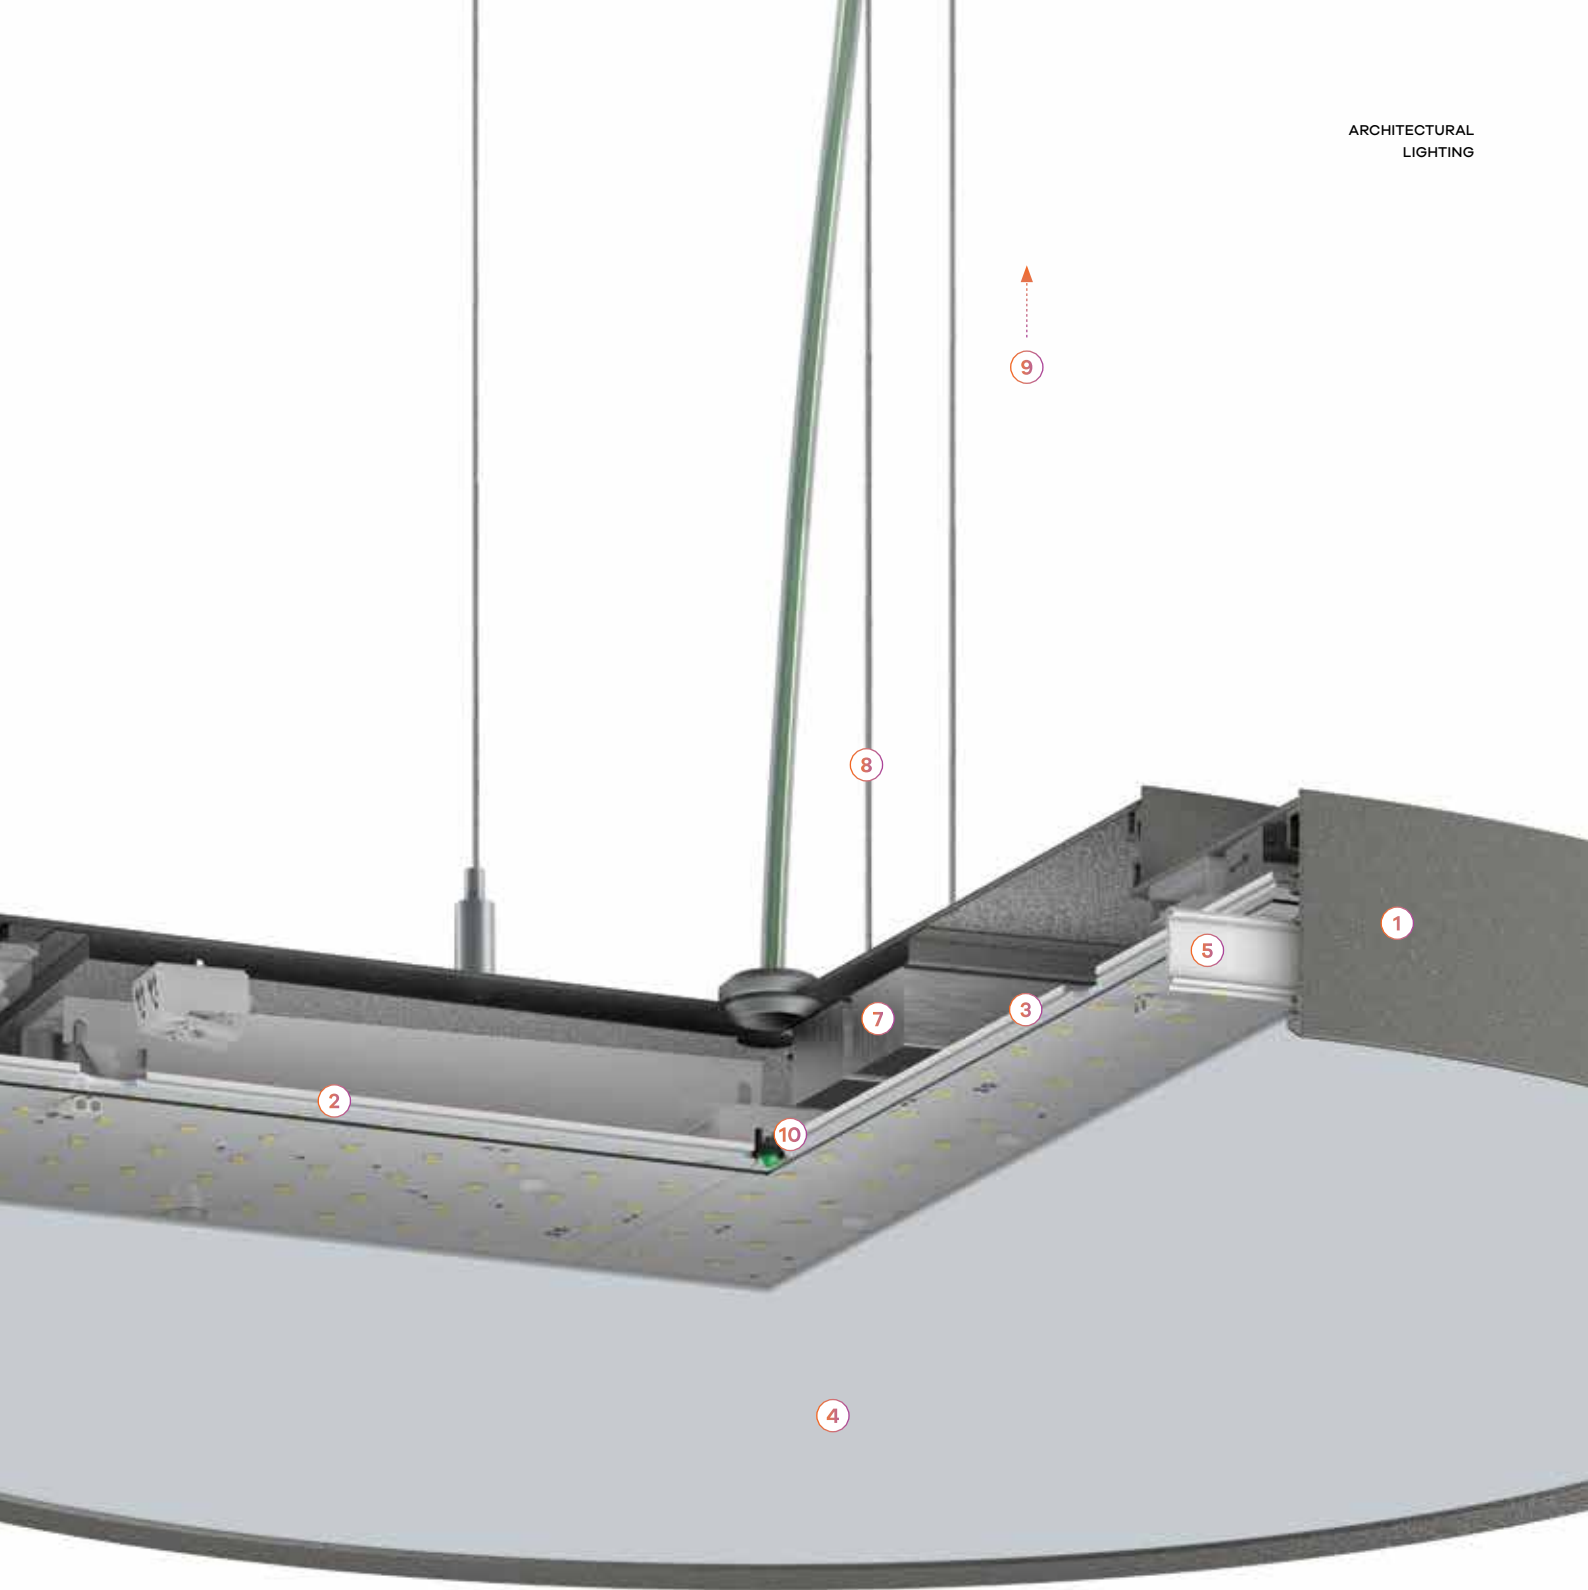

Define your colour

ARCHITECTURAL
LIGHTING



¹ Only available for the Rofy 60 and Rofy 60 D/I.



ROFY 60 /T



Product
characteristics

Body Aluminium
Finish Powder coated
Optical system gCONTROL+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 9,5-18 mm


CE	RoHS	Energy
230V/50Hz	IP 40	
IK 04	650°C	Light

01. Select version

ROFY 60 /T




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	Ømm	CODE*
≤22	16	1945	122	Ø300	Ø331	90559L300▼▲0♦00
≤22	24	3085	129	Ø400	Ø427	90559L400▼▲0♦00
≤19	43	5939	138	Ø600	Ø630	90559L600▼▲0♦00
≤19	65	8844	136	Ø900	Ø927	90559L900▼▲0♦00
≤19	107	14432	135	Ø1150	Ø1179	90559L115▼▲0♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	Ømm	CODE*
≤22	16	2135	133	Ø300	Ø331	90561L300▼▲0♦00
≤25	24	3385	141	Ø400	Ø427	90561L400▼▲0♦00
≤22	43	6516	152	Ø600	Ø630	90561L600▼▲0♦00
≤22	65	9704	149	Ø900	Ø927	90561L900▼▲0♦00
≤22	107	15835	148	Ø1150	Ø1179	90561L115▼▲0♦00

ROFY 60 /T

• This product cannot be installed on the wall.



*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) ²	3

Colour temp.	
3000K	3
4000K	0
Tunable White ³	T

02. Select options

OPTIONS

Steel safety cable
L1500 mm 955000

Low Output version
• Under request.



Product details



Trimless application



gCONTROL+ diffuser



LIGHT+ diffuser

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

³ Not available in versions Ø300 mm.

ROFY 60 /T D/I



Product
characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime


80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included


Ceiling thickness

For ceilings between 9,5-18 mm




01. Select version

ROFY 60 /T D/I




gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Hmm	Dmm	Ømm	CODE*
≤19	32	3683	115	119	Ø400	Ø523	90591L400▼▲◆000
≤19	56	6869	123	119	Ø600	Ø723	90591L600▼▲◆◆00
≤19	84	10270	122	135	Ø900	Ø1023	90591L900▼▲◆◆00
≤19	137	16846	123	135	Ø1150	Ø1273	90591L115▼▲◆◆00

LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Hmm	Dmm	Ømm	CODE*
≤22	32	3851	120	119	Ø400	Ø523	90593L400▼▲◆000
≤22	56	7182	128	119	Ø600	Ø723	90593L600▼▲◆◆00
≤22	84	10736	128	135	Ø900	Ø1023	90593L900▼▲◆◆00
≤22	137	17612	129	135	Ø1150	Ø1273	90593L115▼▲◆◆00

ROFY 60 /T D/I

• This product cannot be installed on the wall.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Colour ³	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ⁴	3

Colour temp.	◆
3000K	3
4000K	0
Tunable White	T

02. Select options

OPTIONS	Code
Tilted bracket	
Ø400 mm	927100
Ø600 mm	927101
Ø900 mm	927102
Ø1150 mm	927103
Steel safety cable	
L1500 mm	955000
Low Output version	
• Under request.	




Product details



Trimless application

Tilted bracket



gCONTROL+ diffuser

LIGHT+ diffuser

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ See page 164.

⁴ Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.





ROFY 60



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40


IK 04

650°C


01. Select version



ROFY 60




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	1945	122	Ø300	90583L300♥♣0♦00
≤22	24	3085	129	Ø400	90583L400♥♣0♦00
≤19	43	5939	138	Ø600	90583L600♥♣0♦00
≤19	65	8844	136	Ø900	90583L900♥♣0♦00
≤19	107	14432	135	Ø1150	90583L115♥♣0♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	2135	133	Ø300	90585L300♥♣0♦00
≤25	24	3385	141	Ø400	90585L400♥♣0♦00
≤22	43	6516	152	Ø600	90585L600♥♣0♦00
≤22	65	9704	149	Ø900	90585L900♥♣0♦00
≤22	107	15835	148	Ø1150	90585L115♥♣0♦00

*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Emergency	
No EM	0
EM 3h (K3) ²	3

Colour temp.	
3000K	3
4000K	0
Tunable White ³	T

ROFY 60

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

³ Not available in the Ø300 version.

02. Select options

OPTIONS Code*

Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

Transparent current supply cable

L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm².

Round ceiling rose

Surface mounted T24	45 l		Ø95	978600	♣
Surface mounted T26 (DALI+K3)				978601	♣

Recessed T5		Ø70	33 l		Ø90	971300	♣
Recessed T27 (DALI+K3)						978700	♣


Central ceiling rose

Surface mounted T21	45 l		Ø95	977211	♣
Surface mounted T28 (DALI+K3)				977230	♣

Suspension rod

D95 - Ø400, Ø600 mm	913000	♣
D120 - Ø900, Ø1150 mm	913010	♣

• Ceiling rose included.



Low Output version

• Under request.



*Replace the symbols to complete the code

Colour

☐ White	W
☒ Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod



ROFY 60 D/I



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40

IK 04


650°C

01. Select version

ROFY 60 D/I




gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	32	3907	122	Ø400	90587L400♥♣♦00
≤19	56	7286	130	Ø600	90587L600♥♣♦♦00
≤19	84	10892	130	Ø900	90587L900♥♣♦♦00
≤19	137	17867	130	Ø1150	90587L115♥♣♦♦00

LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	32	4242	133	Ø400	90589L400♥♣♦♦00
≤22	56	7910	141	Ø600	90589L600♥♣♦♦00
≤22	84	11826	141	Ø900	90589L900♥♣♦♦00
≤22	137	19398	142	Ø1150	90589L115♥♣♦♦00

ROFY 60 D/I

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee total light uniformity on the ceiling in the suspended version, installation must be carried out at a minimum distance of 500 mm.



*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Colour ³	♠
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Emergency	●
No EM	0
EM 3h (K3) ⁴	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White	T


¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ See page 164.

⁴ Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

02. Select options

OPTIONS	Code*
Suspension	
S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	
Round ceiling rose	
Surface mounted T24 45 l Ø95	978600♣
Surface mounted T26 (DALI+K3)	978601♣
Recessed T5 Ø70 33 l Ø90	971300♣
Recessed T27 (DALI+K3)	978700♣
Central ceiling rose	
Surface mounted T21 45 l Ø95	977211♣
Surface mounted T28 (DALI+K3)	977230♣
Suspension rod	
D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣
• Ceiling rose included.	
	
Low Output version	
• Under request.	



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Indirect light



Outer parallel suspension



Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod



ROFY 85 /E



Product characteristics

- Body**
Aluminium
- Finish**
Powder coated
- Optical system**
gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser
- Light source**
LED, RG1, CRI>80, MacAdam Step ≤3
- LED lifetime**
80.000h @ L90, B10, Ta 25°C
- Control gear**
LED driver 220-240V-50/60Hz included
- Ceiling thickness**
For ceilings between 1-25 mm


230V/50Hz		IP 20/40
IK 04	650°C	

01. Select version

ROFY 85 / E




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	Φ	CODE*
≤19	16	1810	113	Ø300	Ø286	90622L300▼▲0♦00
≤19	24	2871	120	Ø400	Ø386	90622L400▼▲0♦00
≤19	43	5526	129	Ø600	Ø586	90622L600▼▲0♦00
≤19	65	8230	127	Ø900	Ø886	90622L900▼▲0♦00
≤19	107	13429	126	Ø1150	Ø1136	90622L115▼▲0♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	Φ	CODE*
≤25	16	2135	133	Ø300	Ø286	90621L300▼▲0♦00
≤25	24	3385	141	Ø400	Ø386	90621L400▼▲0♦00
≤22	43	6516	152	Ø600	Ø586	90621L600▼▲0♦00
≤22	65	9704	149	Ø900	Ø886	90621L900▼▲0♦00
≤22	107	15835	148	Ø1150	Ø1136	90621L115▼▲0♦00

ROFY 85 / E

- This product cannot be installed on the wall.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White ³	T

02. Select options

OPTIONS Code


Steel safety cable 955000

Low Output version

- Under request.



Product details



Ceiling recessed application



gCONTROL+ diffuser



LIGHT+ diffuser

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

³ Not available in the Ø300 version.

ROFY 85




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system gCONTROL+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏚	IP 40
IK 04	650°C

01. Select version

ROFY 85




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	1999	125	Ø300	90620L300♥♣♦00
≤22	24	3171	132	Ø400	90620L400♥♣♦00
≤19	43	6104	142	Ø600	90620L600♥♣♦00
≤19	65	9090	140	Ø900	90620L900♥♣♦00
≤19	107	14833	139	Ø1150	90620L115♥♣♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤25	16	2162	135	Ø300	90619L300♥♣♦00
≤25	24	3428	143	Ø400	90619L400♥♣♦00
≤22	43	6598	153	Ø600	90619L600♥♣♦00
≤22	65	9827	151	Ø900	90619L900♥♣♦00
≤22	107	16035	150	Ø1150	90619L115♥♣♦00

ROFY 85

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.



*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) ²	3

Colour temp.	
3000K	3
4000K	0
Tunable White ³	T

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

³ Not available in the Ø300 version.

02. Select options

OPTIONS Code*

Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

Transparent current supply cable

L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm².

Round ceiling rose

Surface mounted T24	45 l		Ø95	978600♣
Surface mounted T26 (DALI+K3)				978601♣

Recessed T5		Ø70	33 l		Ø90	971300♣
Recessed T27 (DALI+K3)						978700♣


Central ceiling rose

Surface mounted T21	45 l		Ø95	977211♣
Surface mounted T28 (DALI+K3)				977230♣

Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣

• Ceiling rose included.



Low Output version

• Under request.



*Replace the symbols to complete the code

Colour

☐ White	W
☒ Black	B



Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod



ROFY 85 D/I




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system gCONTROL+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏏	IP 40
IK 04	650°C

01. Select version

ROFY 85 D/I




gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	32	4018	126	Ø400	90624L400♥♣♦00
≤19	56	7494	134	Ø600	90624L600♥♣♦♦00
≤19	84	11203	133	Ø900	90624L900♥♣♦♦00
≤19	137	18377	134	Ø1150	90624L115♥♣♦♦00

LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	32	4242	133	Ø400	90623L400♥♣♦♦00
≤22	56	7910	141	Ø600	90623L600♥♣♦♦00
≤22	84	11826	141	Ø900	90623L900♥♣♦♦00
≤22	137	19398	142	Ø1150	90623L115♥♣♦♦00

ROFY 85 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.



*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Colour ³	♣
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ⁴	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White	T

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ See page 164.

⁴ Prepared for emergency remote control. Only available for the Ø600, Ø900 and Ø1150 mm versions.

02. Select options

OPTIONS Code*

Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

Transparent current supply cable

L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm².

Round ceiling rose

Surface mounted T24	45 l		Ø95	978600♣
Surface mounted T26 (DALI+K3)				978601♣

Recessed T5		Ø70	33 l		Ø90	971300♣
Recessed T27 (DALI+K3)						978700♣


Central ceiling rose

Surface mounted T21	45 l		Ø95	977211♣
Surface mounted T28 (DALI+K3)				977230♣

Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣

• Ceiling rose included.



Low Output version

• Under request.



*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B



Product details



Suspended application



Indirect light



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod



ROFY 85 IP /E




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 1-35 mm


CE	RoHS	
230V/50Hz	IP 20/54	
IK 04	650°C	

01. Select version

ROFY 85 IP / E



LIGHT+ - Opal diffuser



W	lm output	lm/W	Dmm	Ø	CODE*
16	2135	133	Ø323	Ø305	90573L300▼▲0♦00
24	3385	141	Ø423	Ø405	90573L400▼▲0♦00
43	6516	152	Ø623	Ø605	90573L600▼▲0♦00

ROFY 85 IP / E

- This product cannot be installed on the wall.



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White ³	T

02. Select options

OPTIONS Code

Steel safety cable


L1500 mm 955000

Low Output version

- Under request.



Product details



Ceiling recessed application



LIGHT+ diffuser

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600 mm.

³ Not available in versions Ø300 mm.

ROFY 85 IP /C




Product
characteristics

Body Aluminium
Finish Powder coated
Optical system LIGHT+ - Opal diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS COMPLIANT	⏏
230V/50Hz	IP 54	
IK 04	650°C	🏠

01. Select version

ROFY 85 IP /C



LIGHT+ - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
16	2135	133	Ø300	90581L300♥♣0♦00
24	3385	141	Ø400	90581L400♥♣0♦00
43	6516	152	Ø600	90581L600♥♣0♦00



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) ²	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White ³	T

02. Select options

OPTIONS

Low Output version

- Under request.



Product details



Ceiling surface application



Wall mounted



LIGHT+ diffuser



IP54 protection

¹ See page 164.

² Prepared for emergency remote control. Only available for the Ø600 mm.

³ Not available in versions Ø300 mm.



