




Architectural
lighting

SLIM

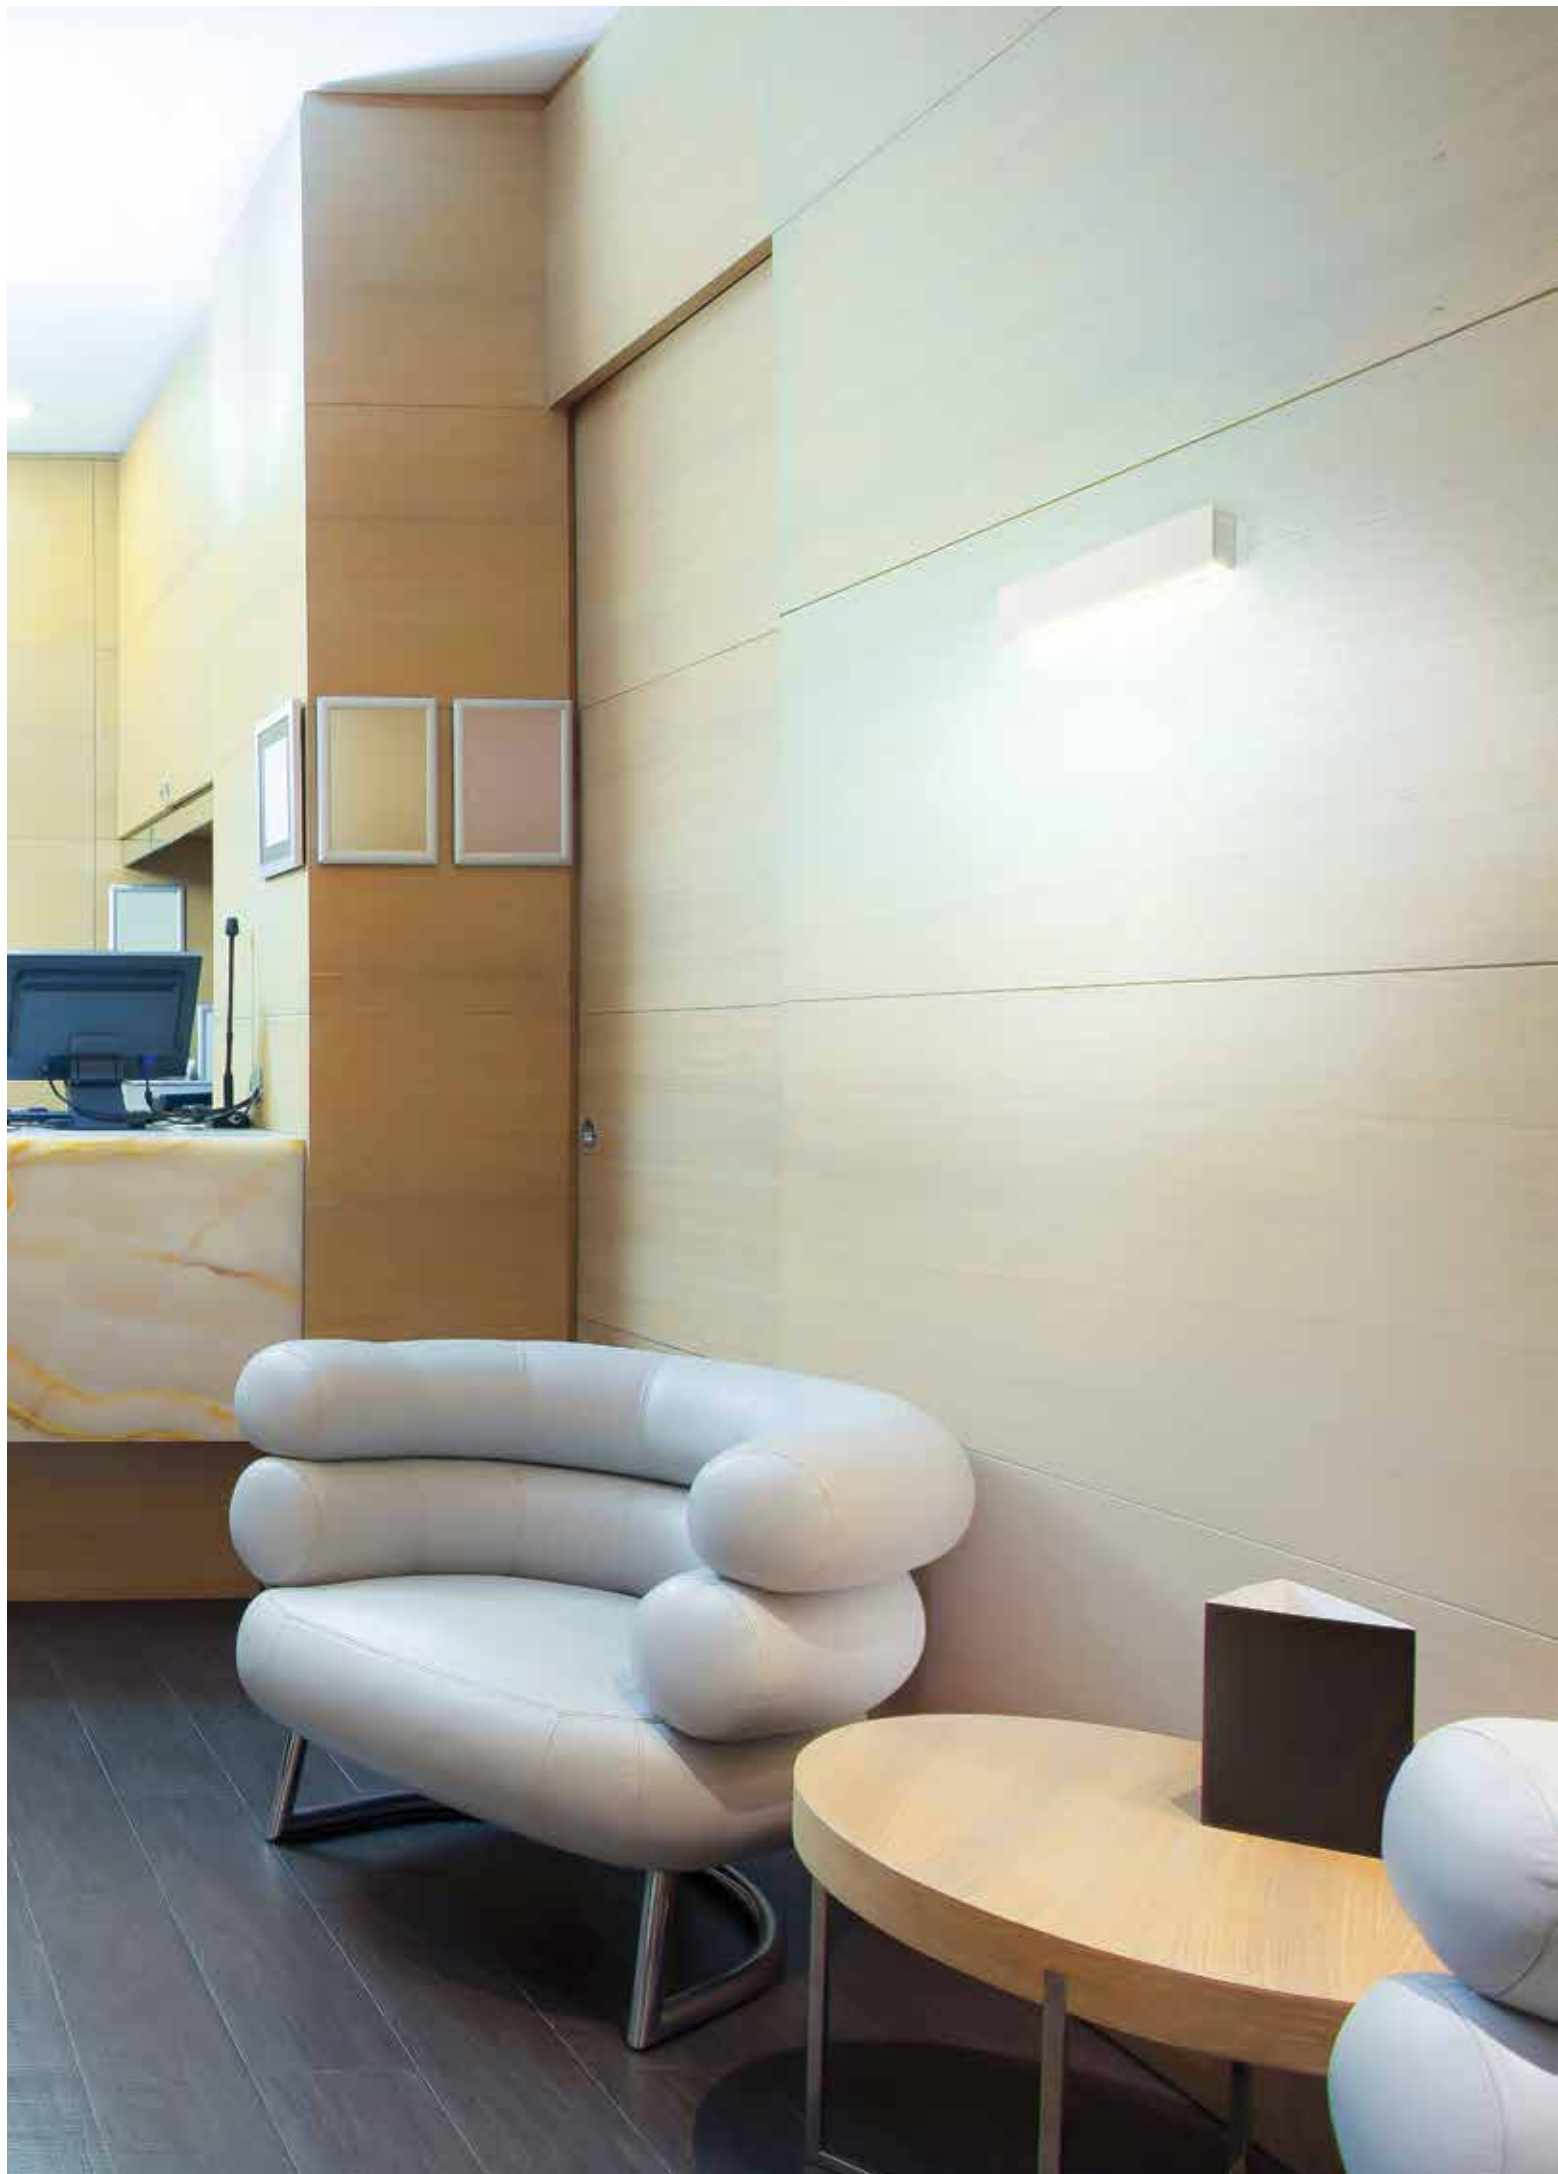

SLIM
456



SLIM



Product
characteristics


Body
Steel sheet
Finish
Powder coated
Optical system
LIGHT+ - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L90, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included

CE	RoHS
230V/50Hz	
⏚	IP 40
650°C	


01. Select version



SLIM



LIGHT+ - Opal diffuser



W
8
15

lm
output
802
1603

lm/W
100
107

Lmm
350
590

CODE*
90833L350▼▲0◆00
90833L590▼▲0◆00

*Replace the symbols to complete the code

Control gear ▼
HF E
DALI H

Colour ¹ ▲
□ White W
■ Black B

Colour temp. ◆
3000K 3
4000K 0

Product details



Product detail

¹ Other colours available under request.