




**Battens and
track systems**

TRN

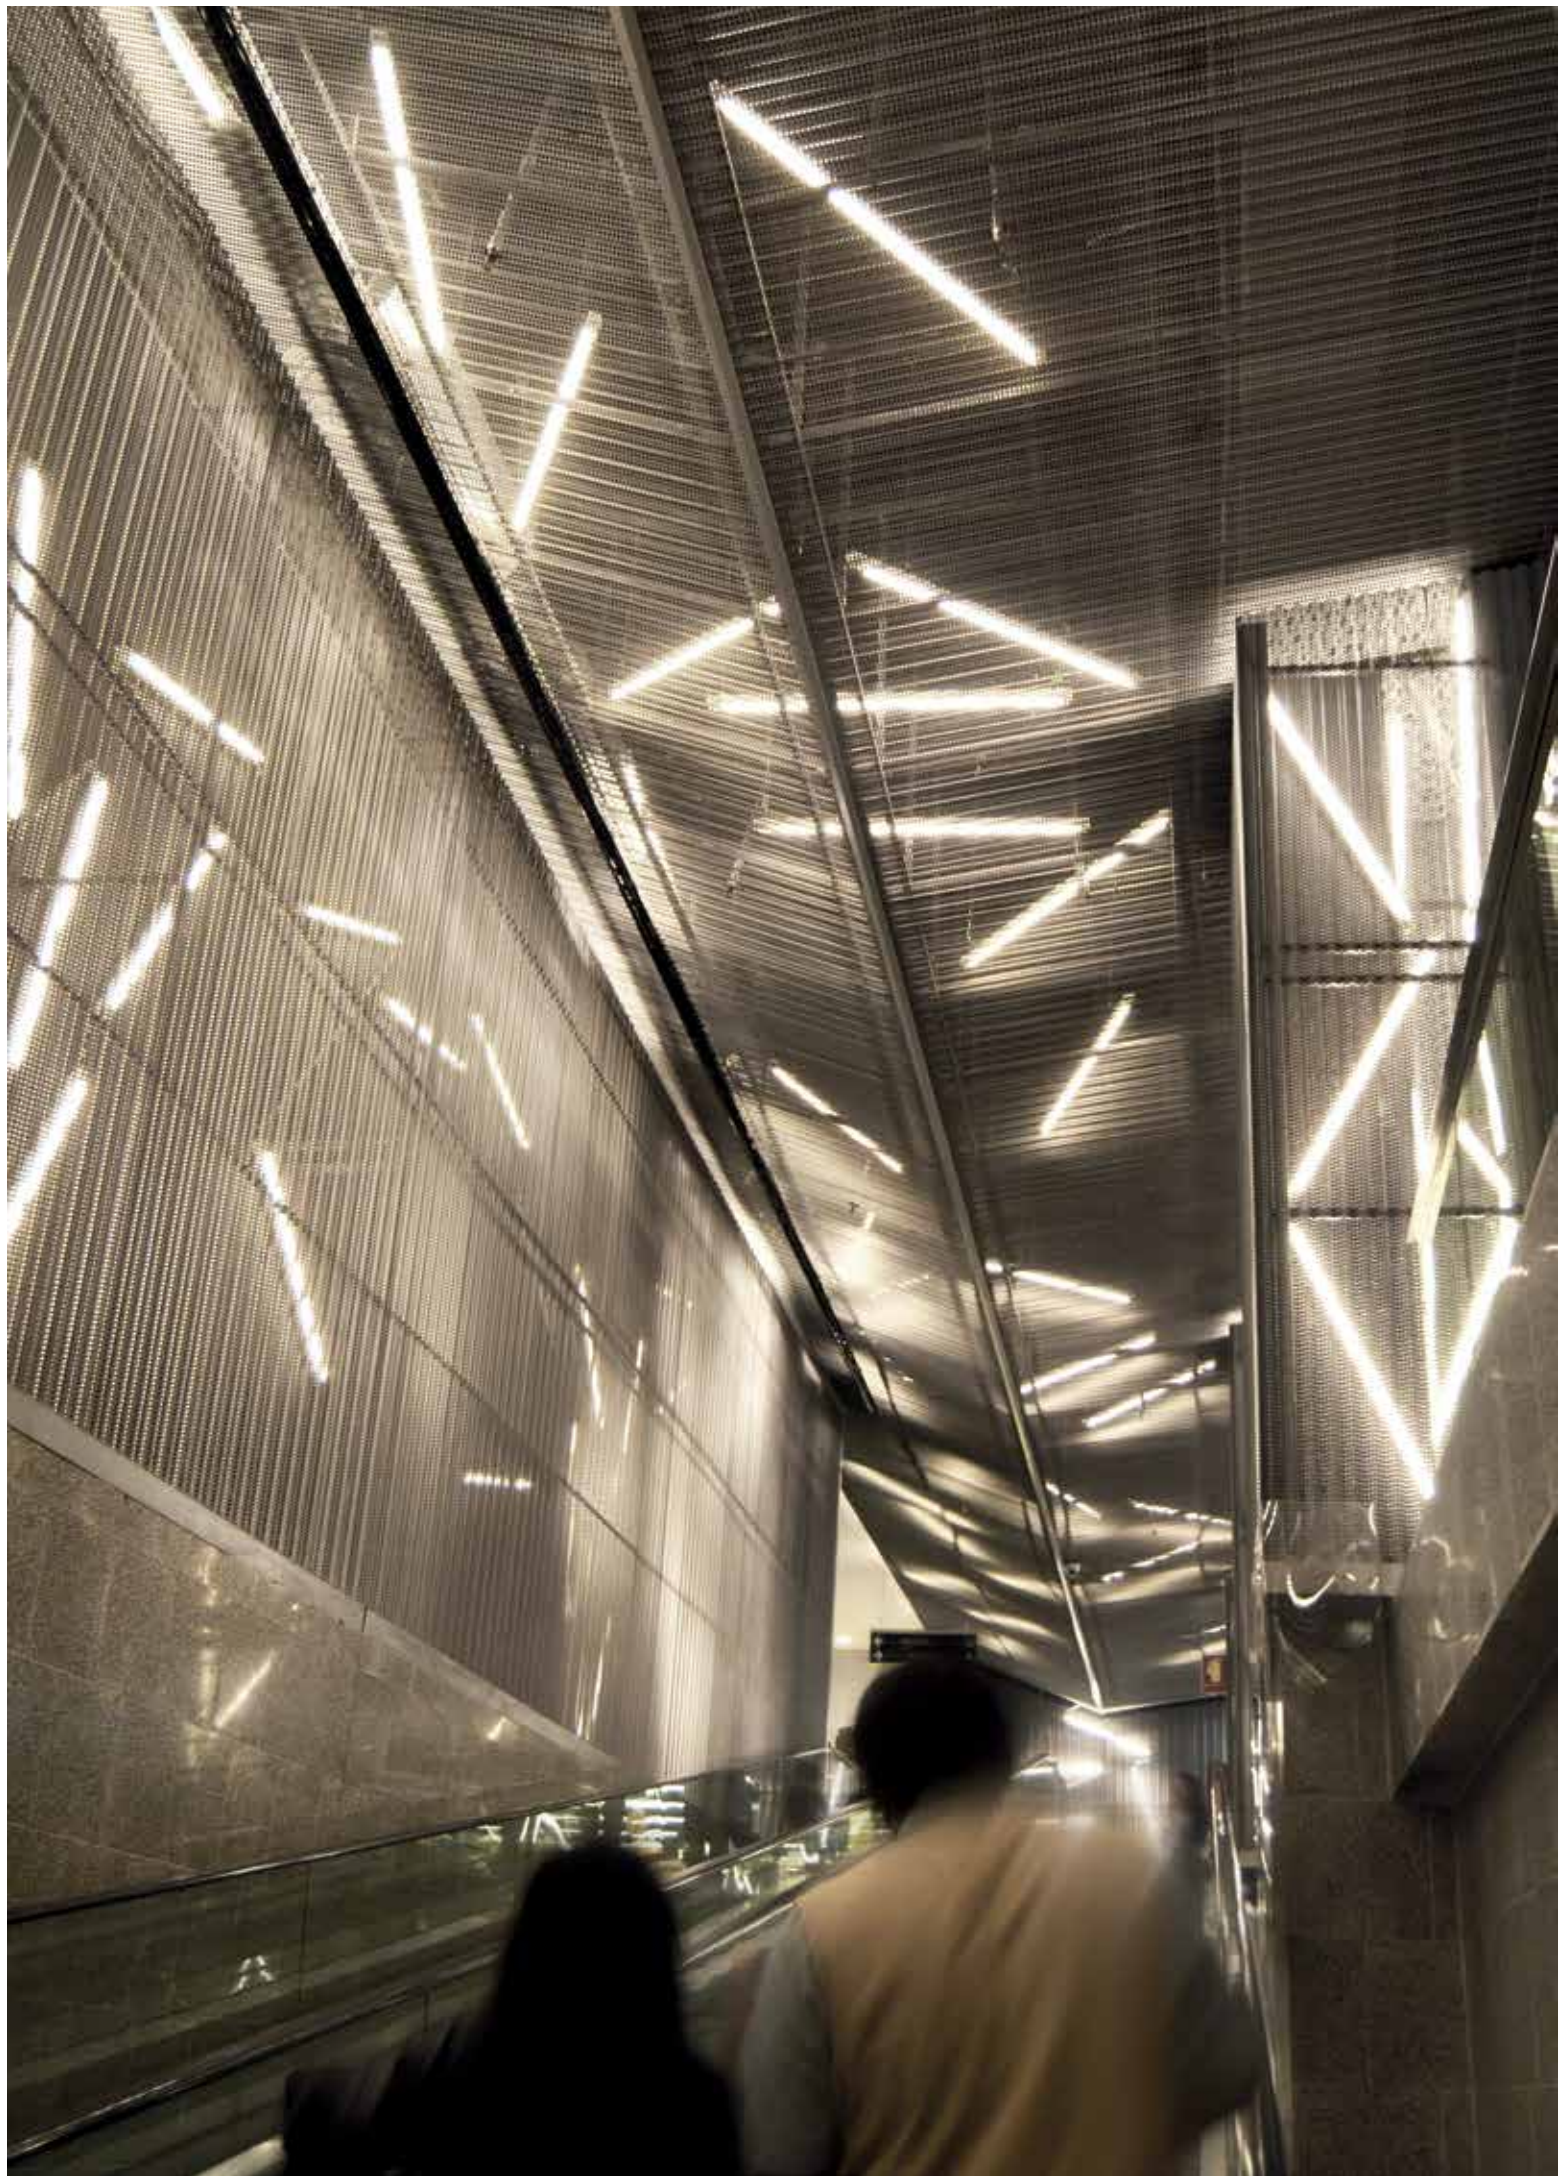

TRN
790





**Product
characteristics**

Body

Steel sheet

Finish

White matte powder coated

Optical system

DAZ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 20

650°C


01. Select version



TRN



DAZ - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
12	1747	146	590	90834L060▼W0♦♣
23	3494	146	1150	90834L120▼W0♦♣
29	4368	151	1430	90834L150▼W♦♣♣

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3

Colour temp.	♦
3000K	3
4000K	0

Connector	♣
No connector	00
M3M ²	M3
M5M ³	M5
M3MFC ⁴	C3
M5MFC ⁵	C5



Product details



Connector detail



LED

¹ Prepared for emergency remote control.
² 3-pole mini Wieland GST15i3 male connector.
³ 5-pole mini Wieland GST15i5 male connector.
⁴ 3-pole mini Wieland GST15i3 male connector + L1000 mm cable with 3-pole mini Wieland GST15i3 female connector.
⁵ 5-pole mini Wieland GST15i5 male connector + L1000 mm cable with 5-pole mini Wieland GST15i5 female connector.