



Tubular
luminaires

TTP 70 COLOUR




TTP 70 Colour
746




Define your colour

TUBULAR
LUMINAIRES



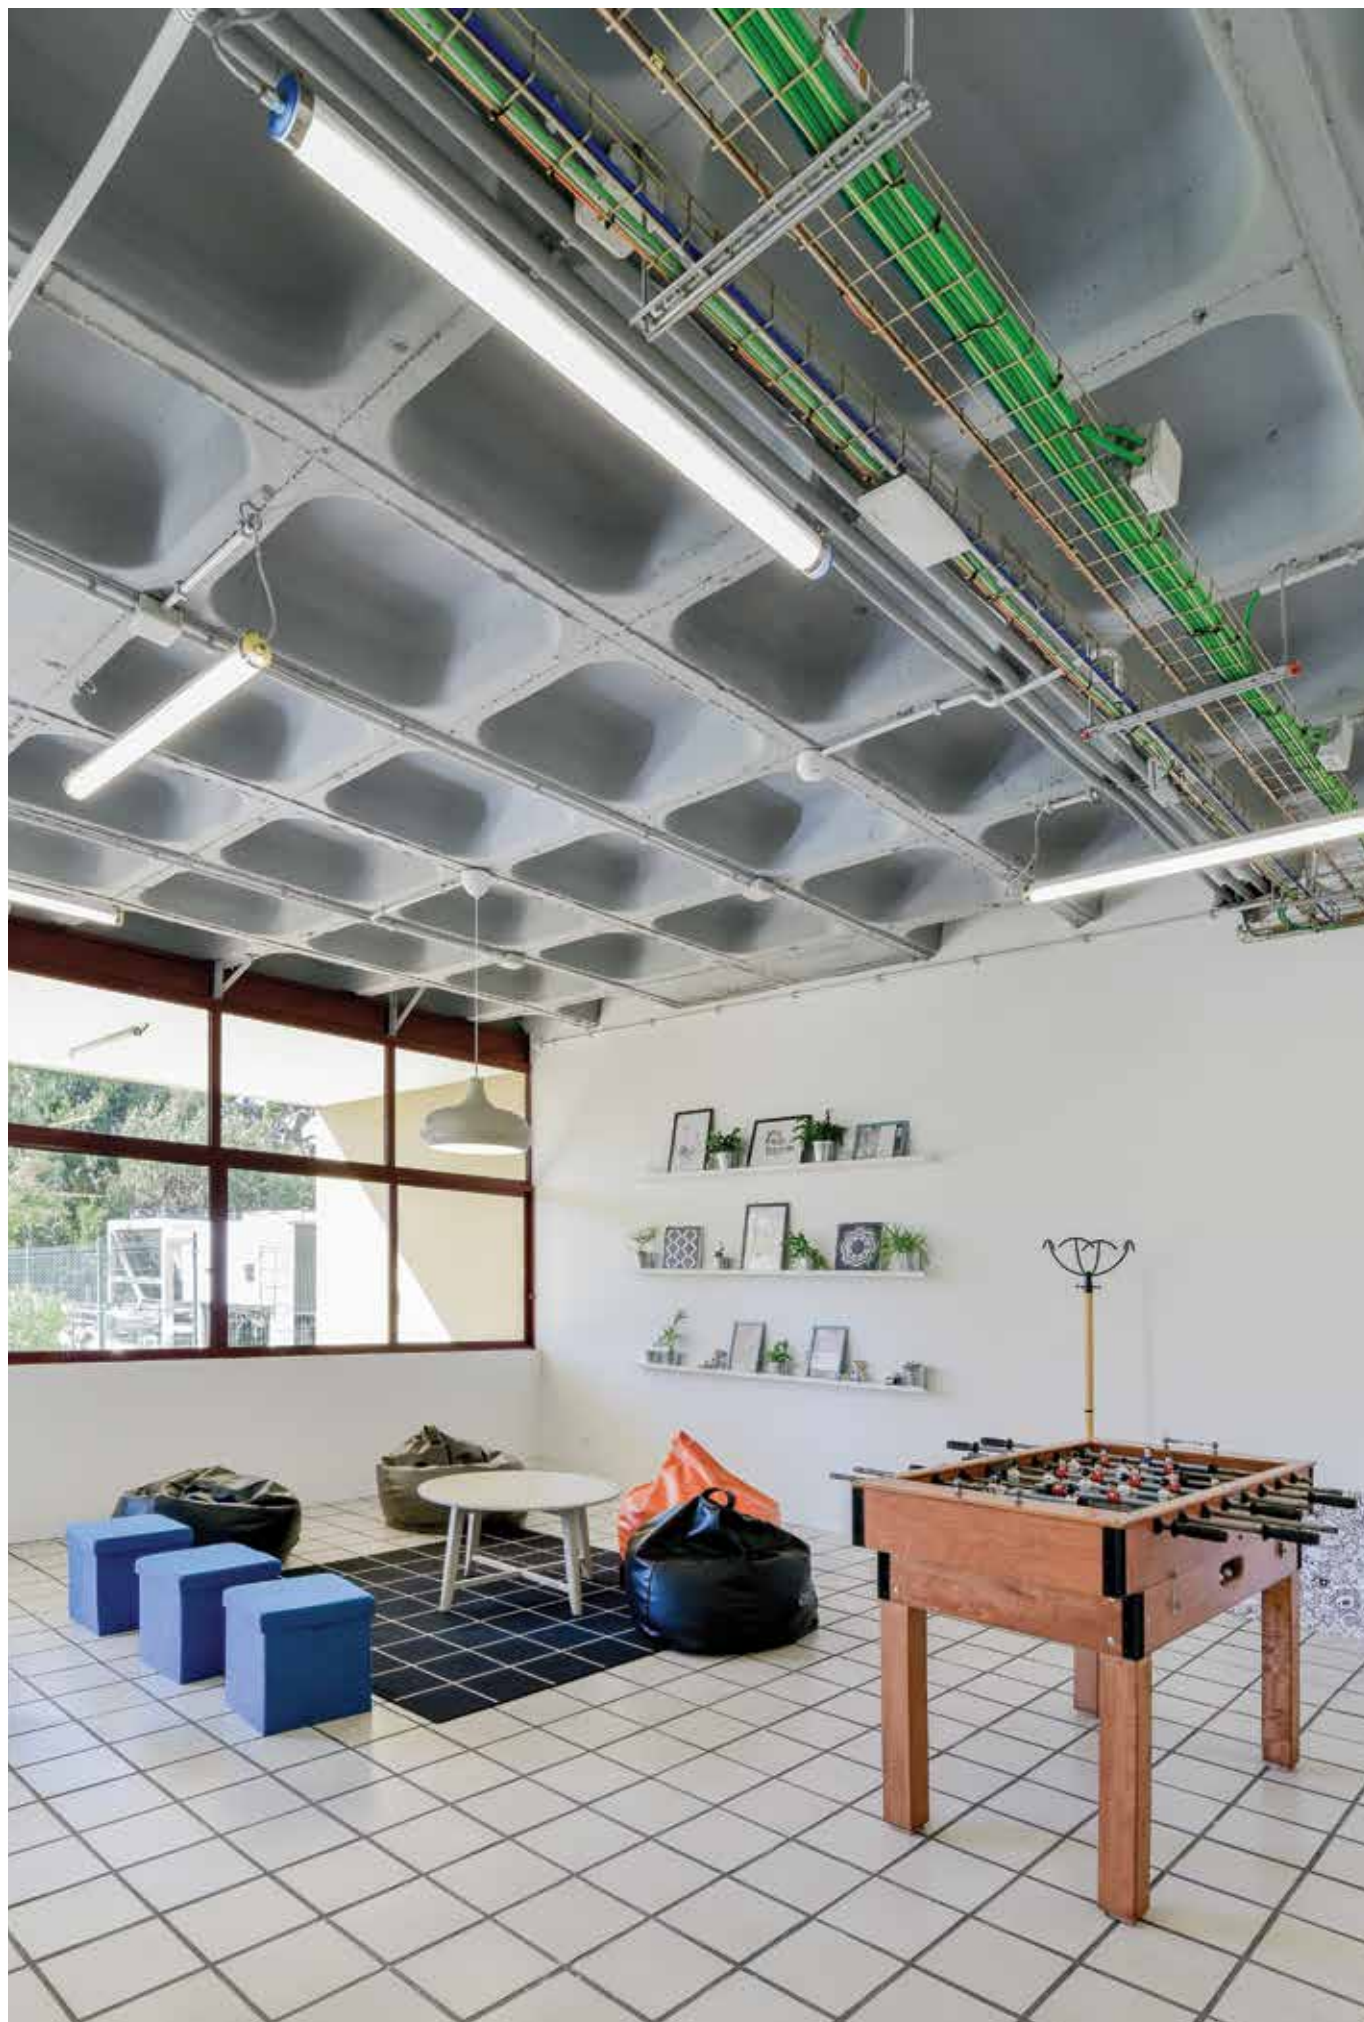

TTP 70 Colour

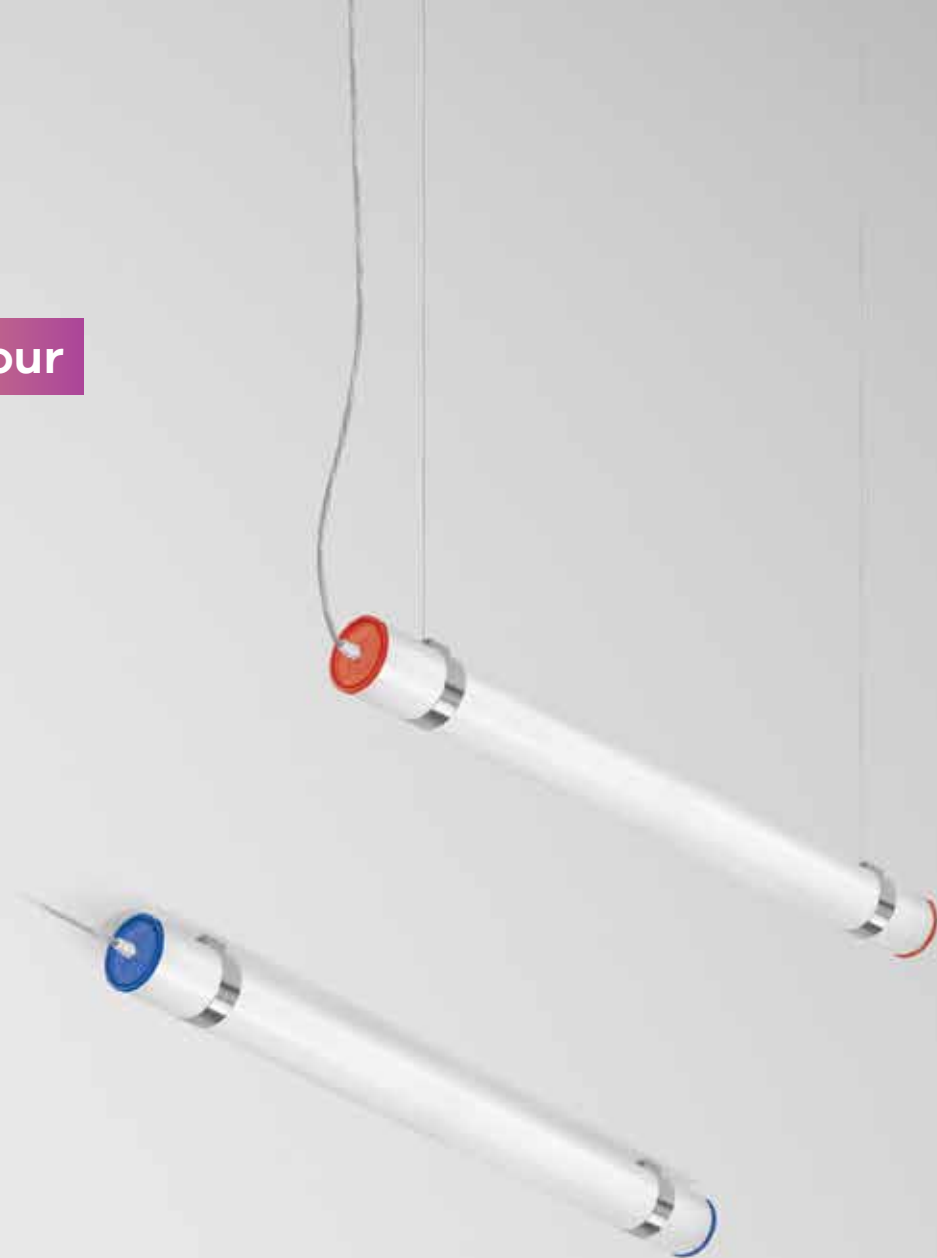

Product
characteristics

- Body**
Polycarbonate tube and injected polycarbonate end caps
- Finish**
White matte powder coated gear tray
- Fixing system**
Clamps not included
- Optical system**
TOP - Opal diffuser
- Wiring**
L1500 mm H07RN-F cable and plastic cable gland included
- Light source**
LED, RG0, CRI>80, MacAdam Step ≤3
- LED lifetime**
80.000h @ L90, B10, Ta 25°C
- Control gear**
LED driver 220-240V-50/60Hz included

CE

RoHS

230V/50Hz

IP 40

960°C



*Replace the symbols to complete the code

Control gear ▼
HF E
DALI ¹ H


Colour ² ▲
□ Transparent 0
■ Black B
■ Purple X
■ Red K
■ Orange Y
■ Yellow T
■ Green V
■ Blue U

Emergency ●
No EM 0
EM 3h (K3) ³ 3


Colour temp. ◆
3000K 3
4000K 0

01. Select version

TTP 70 Colour



TOP - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
12	1691	141	620	90551L060▼▲0◆00
17	2536	149	900	90551L090▼▲0◆00
21	3382	161	1180	90551L120▼▲0◆00
26	4227	163	1460	90551L150▼▲0◆00

TTP 70 Colour

- To complete the product add the fixing system. Please order separately.
- For suspended application add the suspension and ceiling rose. Please order separately.

02. Select options

OPTIONS Code

Fixing system
Stainless steel clamp A1 D70 (x2)  915403

Suspension
S4 L3000 mm (x2) 910204
S4 L6000 mm (x2) 910208

Transparent current supply cable
L3000 mm - 3 x 0,75 mm² 940401
L3000 mm - 5 x 0,75 mm² 940501
L6000 mm - 3 x 0,75 mm² 940402
L6000 mm - 5 x 0,75 mm² 940507

Round ceiling rose
Surface T24 D95  45 | Ø95 978600▲
Recessed T5 D90  Ø70 33 | Ø90 971300▲

IP44
• Under request.

¹ In the DALI versions, the luminaire is equipped with a metal cable gland and transparent 5 x 0,75 mm² cable.

² End cap colour.

³ 3h emergency unit with self-test. Only available in HF versions.