




Architectural
lighting

VEGA

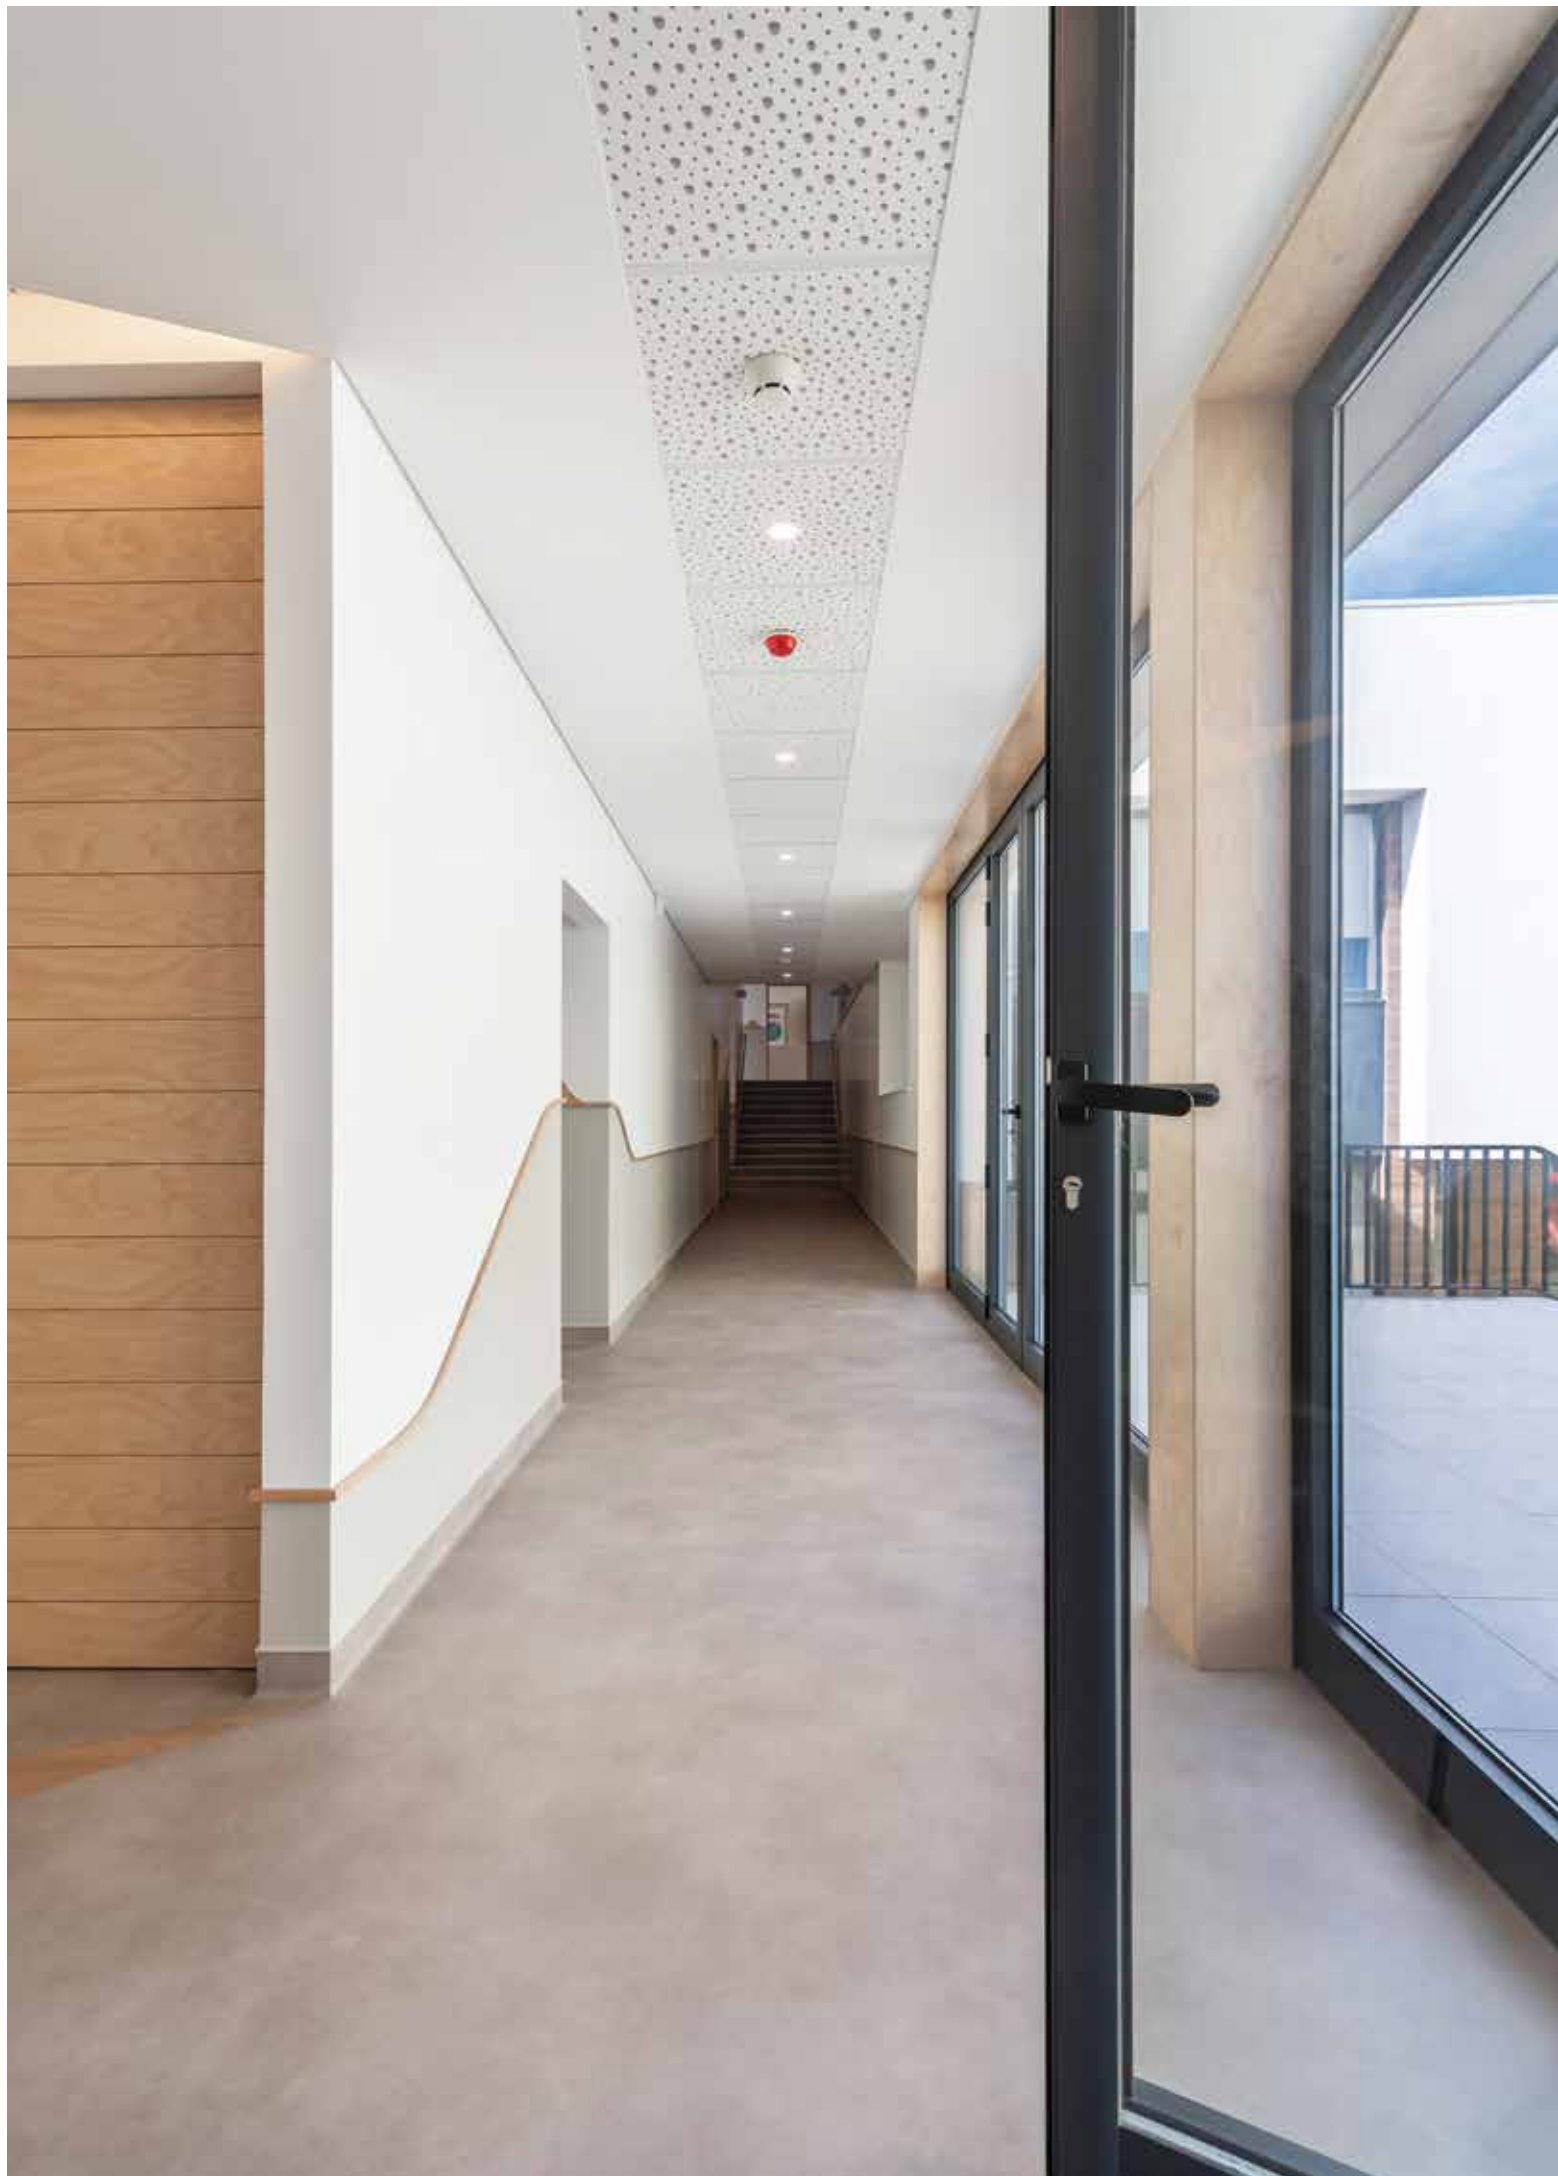

VEGA /E
366



VEGA Sq /E
368



VEGA
372



VEGA Sq
374



VEGA IP /E
378




VEGA IP Sq /E
380




VEGA IP
382



Application types

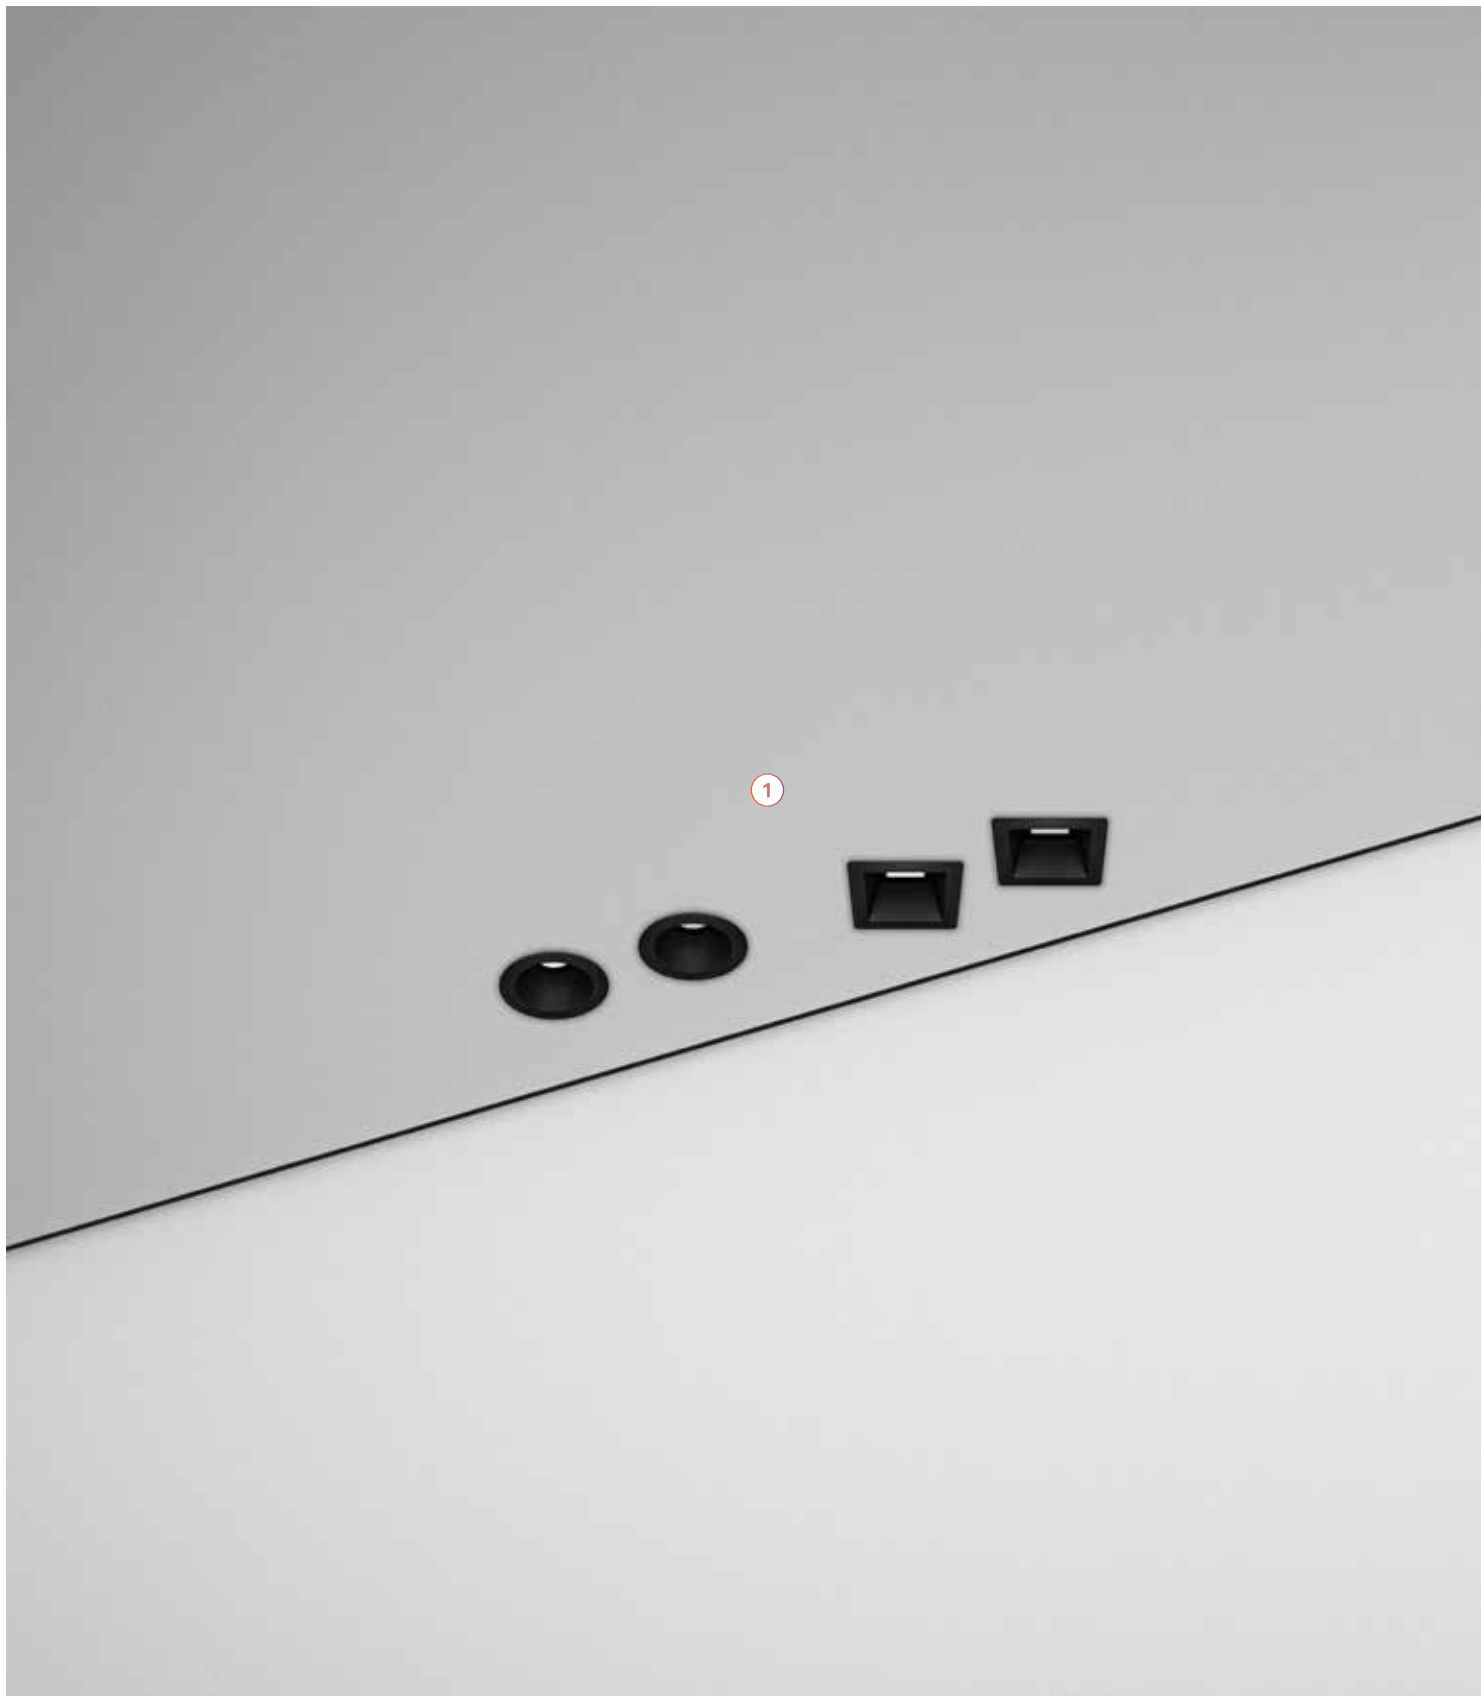

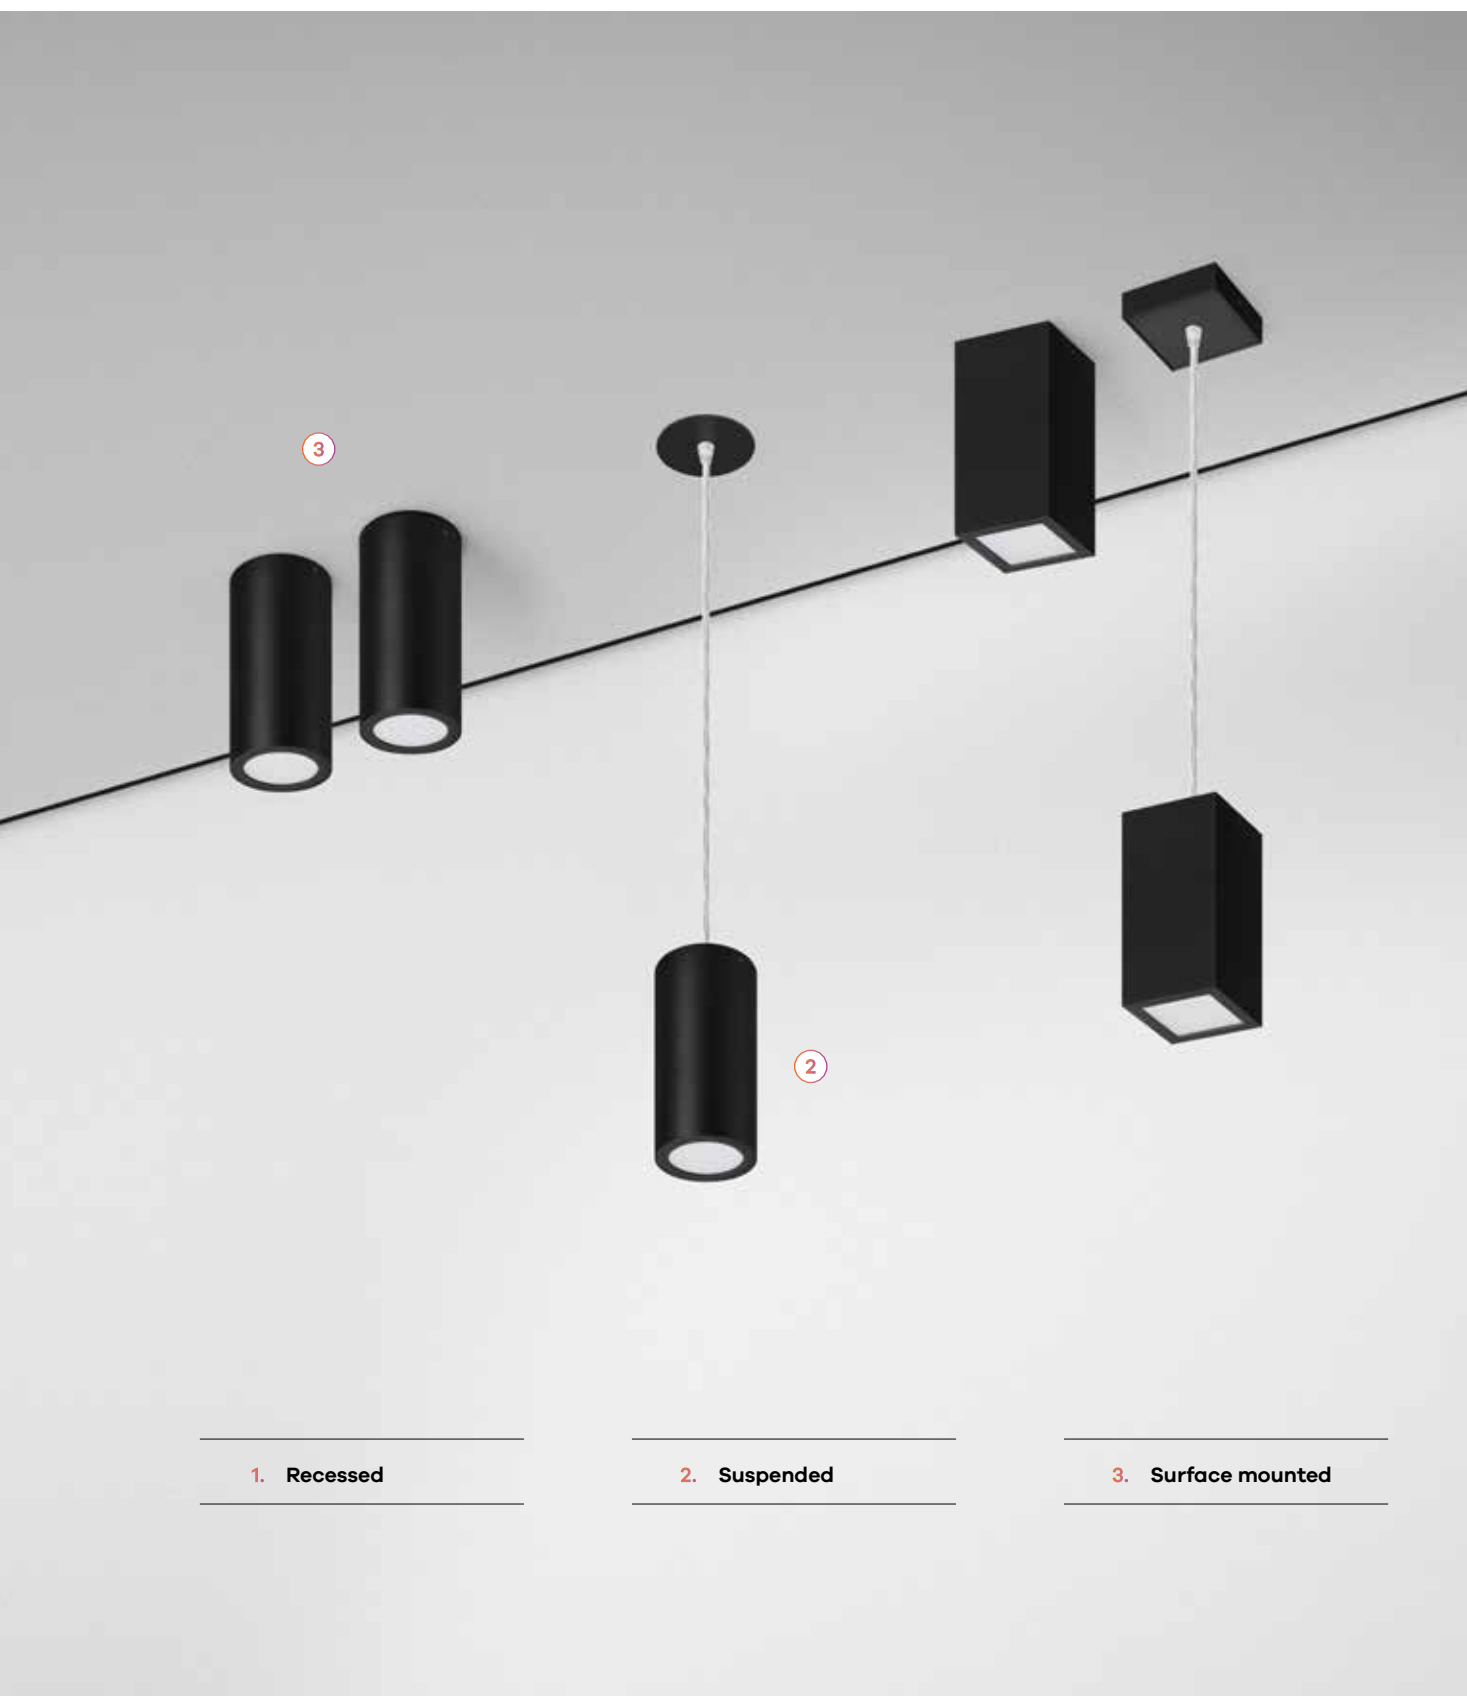

1. Recessed

2. Suspended

3. Surface mounted

VEGA /E



Product characteristics

Body
Injected ABS and aluminium heatsink

Finish
Powder coated

Optical system
PRISM+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source
LED, CRI>90, MacAdam Step ≤3

LED lifetime
50.000h @ L90, B10, Ta 25°C


Control gear
Not included

Ceiling thickness
For ceilings between 1-25 mm



01. Select version


VEGA /E



110

Ø100

PRISM+ - Microprismatic diffuser




C0 - C180

C180 - C270

UGR	W	lm output	lm/W	mA	Ø	CODE*
≤19	7	701	100	200	Ø85	90441L0080▲0♦00
≤22	8	856	107	250	Ø85	90441L0110▲0♦00
≤22	12	1152	96	350	Ø85	90441L0150▲0♦00

LIGHT+ - Opal diffuser



C0 - C180

C180 - C270

UGR	W	lm output	lm/W	mA	Ø	CODE*
≤22	7	649	93	200	Ø85	90430L0080▲0♦00
≤22	8	791	99	250	Ø85	90430L0110▲0♦00
≤22	12	1082	90	350	Ø85	90430L0150▲0♦00



*Replace the symbols to complete the code

Colour	Symbol
White	W
Black	B

Colour temp.	Symbol
3000K	3
4000K	0

VEGA /E

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS

Code

Control gear HF

Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E

Control gear dimmable DALI


Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H

Steel safety cable

L 1500 mm	955010
-----------	--------



Product details



Finish in white colour

VEGA Sq /E




Product characteristics

- Body**
Injected ABS and aluminium heatsink
- Finish**
Powder coated
- Optical system**
PRISM+ - Microprismatic diffuser
LIGHT+ - Opal diffuser
- Light source**
LED, CRI>90, MacAdam Step ≤3
- LED lifetime**
50.000h @ L90, B10, Ta 25°C
- Control gear**
Not included
- Ceiling thickness**
For ceilings between 1-25 mm




01. Select version

VEGA Sq /E




PRISM+ - Microprismatic diffuser



UGR	W	lm output	lm/W	mA	Size	CODE*
≤19	7	712	102	200	85x85	90442L0080▲0♦00
≤19	8	869	109	250	85x85	90442L0110▲0♦00
≤22	12	1170	98	350	85x85	90442L0150▲0♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	mA	Size	CODE*
≤19	7	701	100	200	85x85	90437L0080▲0♦00
≤22	8	856	107	250	85x85	90437L0110▲0♦00
≤22	12	1152	96	350	85x85	90437L0150▲0♦00

VEGA Sq /E

• To complete the product add the control gear. Please order separately.



*Replace the symbols to complete the code

Colour ▲
☐ White W
☒ Black B

Colour temp. ♦
 3000K 3
 4000K 0

02. Select options

OPTIONS Code

Control gear HF

Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E

Control gear dimmable DALI

Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H

Steel safety cable

L 1500 mm	955010
-----------	--------



Product details



Finish in white colour





VEGA



Product characteristics

Body
Aluminium

Finish
Powder coated

Optical system
PRISM+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source
LED, CRI>90, MacAdam Step ≤3

LED lifetime
50.000h @ L90, B10, Ta 25°C

Control gear
LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40

650°C


01. Select version



VEGA




PRISM+ - Microprismatic diffuser



UGR	W	lm output	lm/W	CODE*
≤19	8	681	85	90445L008▼▲0◆00
≤19	9	843	94	90445L011▼▲0◆00
≤22	14	1152	82	90445L015▼▲0◆00

LIGHT+ -Opal diffuser



UGR	W	lm output	lm/W	CODE*
≤22	8	691	86	90443L008▼▲0◆00
≤22	9	856	95	90443L011▼▲0◆00
≤25	14	1152	82	90443L015▼▲0◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour	▲
□ White	W
■ Black	B

Colour temp.	◆
3000K	3
4000K	0


VEGA

• To complete the product add the ceiling rose. Please order separately.

02. Select ceiling rose



Recessed




HF

Ø95 CODE* 912620▲

DALI

Ø95 CODE* 912630▲

Surface



HF

Ø95 CODE* 912600▲

DALI

Ø95 CODE* 912610▲

*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

CEILING ROSE

• Transparent current supply cable with L1500 mm included.

VEGA Sq




Product characteristics

Body Aluminium
Finish Powder coated
Optical system PRISM+ - Microprismatic diffuser LIGHT+ - Opal diffuser
Light source LED, CRI>90, MacAdam Step ≤3
LED lifetime 50.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included


CE	RoHS
230V/50Hz	
⏚	IP 40
650°C	

01. Select version

VEGA Sq




PRISM+ - Microprismatic diffuser



UGR	W	lm output	lm/W	CODE*
≤19	8	743	93	90446L008▼▲0◆00
≤19	9	908	101	90446L011▼▲0◆00
≤22	14	1241	89	90446L015▼▲0◆00

LIGHT+ -Opal diffuser



UGR	W	lm output	lm/W	CODE*
≤22	8	743	93	90444L008▼▲0◆00
≤22	9	921	102	90444L011▼▲0◆00
≤25	14	1259	90	90444L015▼▲0◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour	▲
□ White	W
■ Black	B


Colour temp.	◆
3000K	3
4000K	0

VEGA Sq

• To complete the product add the current supply cable and the ceiling rose. Please order separately.

02. Select ceiling rose

Recessed




HF

CODE*
100x100 912720▲

DALI

CODE*
100x100 912730▲

Surface



HF

CODE*
100x100 912700▲

DALI

CODE*
100x100 912710▲




*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

CEILING ROSE

• Transparent current supply cable with L1500 mm included.

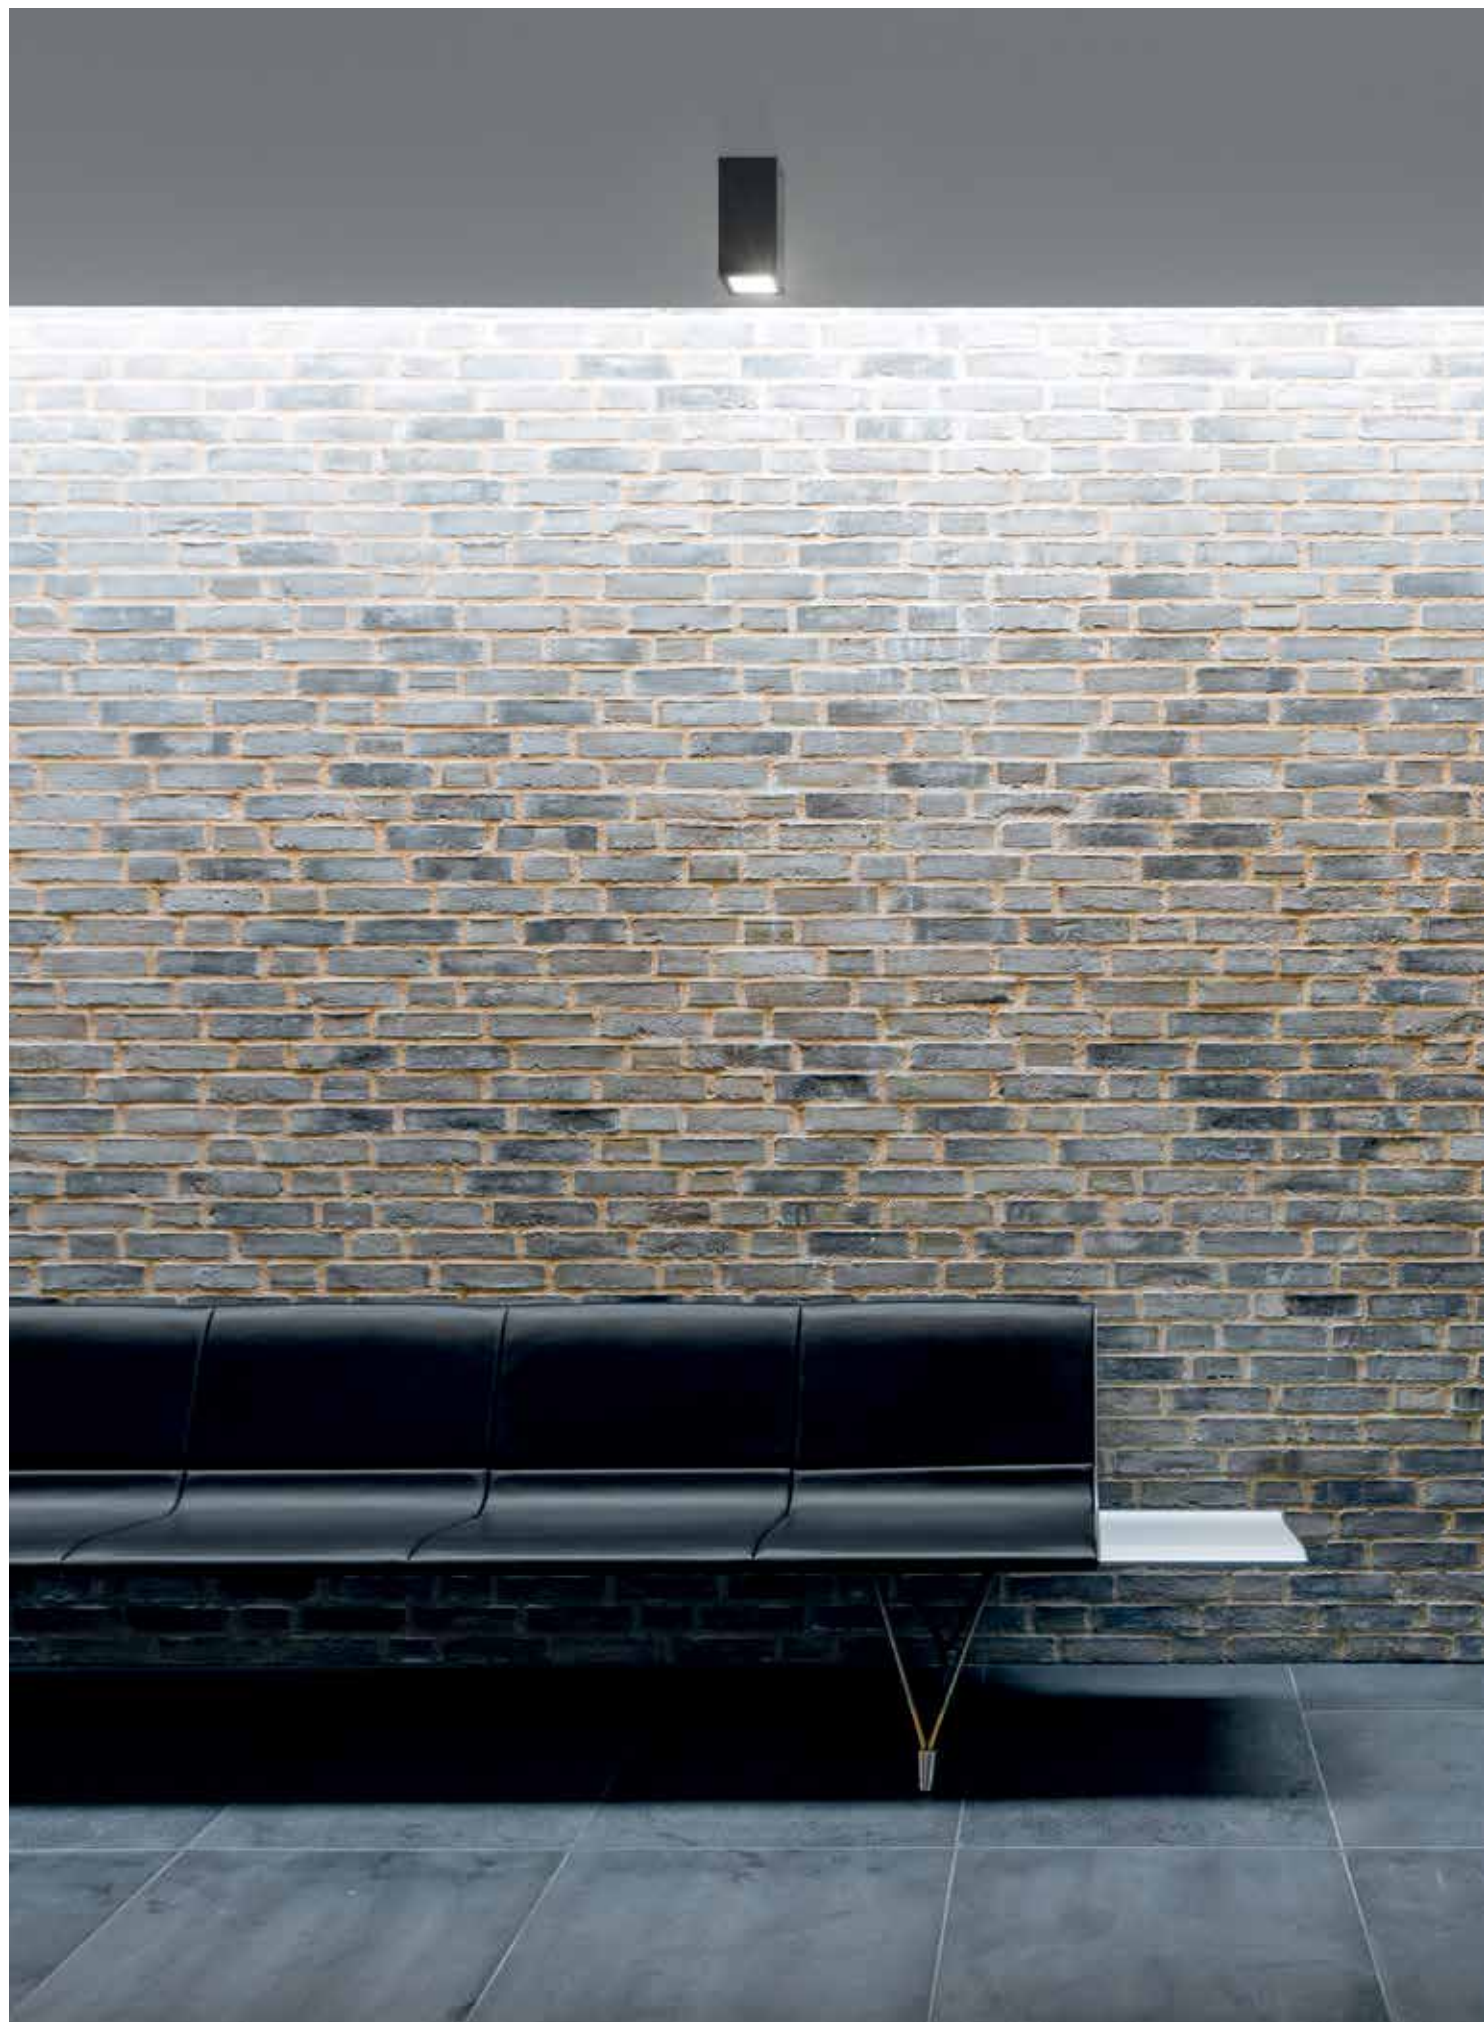




VEGA IP /E



Product characteristics

Body
Injected ABS and aluminium heatsink
Finish
Powder coated
Optical system
LIGHT+ - Opal diffuser
Light source
LED, CRI>90, MacAdam Step ≤3
LED lifetime
50.000h @ L90, B10, Ta 25°C
Control gear
Not included
Ceiling thickness
For ceilings between 1-25 mm



01. Select version




VEGA IP / E



110

LIGHT+ - Opal diffuser



W	lm output	lm/W	mA	Ø	CODE*
7	649	93	200	Ø85	90575L0080▲0◆00
8	791	99	250	Ø85	90575L0110▲0◆00
12	1082	90	350	Ø85	90575L0150▲0◆00

*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B

Colour temp.	◆
3000K	3
4000K	0

VEGA IP / E

• To complete the product add the control gear. Please order separately.

02. Select options



Product details

OPTIONS Code

Control gear HF	
Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E

Control gear dimmable DALI	
Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H

Steel safety cable	
L 1500 mm	955010




Finish in white colour

VEGA IP Sq /E




Product characteristics

Body
Injected ABS and aluminium heatsink
Finish
Powder coated
Optical system
LIGHT+ - Opal diffuser
Light source
LED, CRI>90, MacAdam Step ≤3
LED lifetime
50.000h @ L90, B10, Ta 25°C
Control gear
Not included
Ceiling thickness
For ceilings between 1-25 mm




01. Select version

VEGA IP Sq /E



LIGHT+ - Opal diffuser



W	lm output	lm/W	mA	Size	CODE*
7	701	100	200	85x85	90569L0080▲0◆00
8	856	107	250	85x85	90569L0110▲0◆00
12	1152	96	350	85x85	90569L0150▲0◆00



*Replace the symbols to complete the code

Colour	Symbol
□ White	W
■ Black	B

Colour temp.	Symbol
3000K	3
4000K	0

VEGA IP Sq /E

• To complete the product add the control gear. Please order separately.

02. Select options

OPTIONS Code

Control gear HF

Driver 8,4W 10-42V 200mA HF	900001E
Driver 10,5W 10-42V 250mA HF	900002E
Driver 14,7W 10-42V 350mA HF	900004E

Control gear dimmable DALI

Driver 10,4W 09-52V 200mA DALI+ PUSH	900101H
Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 18,2W 09-52V 350mA DALI+ PUSH	900104H

Steel safety cable

L 1500 mm	955010
-----------	--------



Product details



Finish in white colour

VEGA IP



Product
characteristics

Body

Aluminium

Finish

Powder coated

Optical system

LIGHT+ - Opal diffuser

Light source


LED, CRI>90, MacAdam Step ≤3

LED lifetime

50.000h @ L90, B10, Ta 25°C

Control gear


LED driver 220-240V-50/60Hz included




01. Select version



VEGA IP



LIGHT+ - Opal diffuser



W
8
9
14

lm
output
691
856
1152

lm/W
86
95
82

CODE*
90447L008▼♣0♦00
90447L011▼♣0♦00
90447L015▼♣0♦00

*Replace the symbols to complete the code

Control gear
HF E
DALI H

Colour
□ White W
■ Black B

Colour temp. ♦
3000K 3
4000K 0



Product details



White finish



