


CLOUD

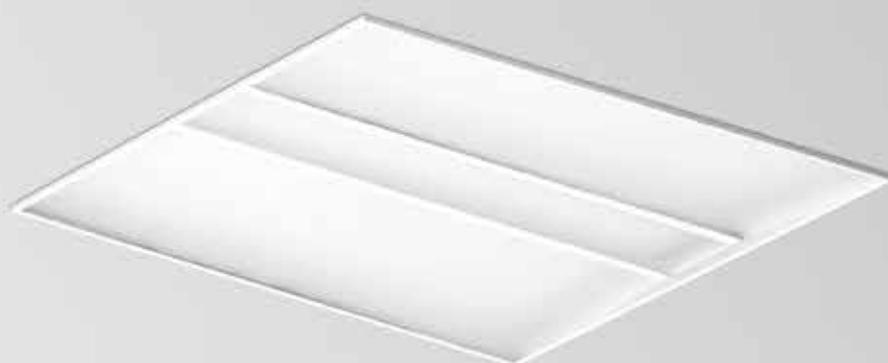

Product characteristics

Body

Steel sheet

Finish

White matte powder coated

Fixing system

Pull-up recessed version with brackets

Optical system

DAM - Microprismatic diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime


80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included

Ceiling thickness


For ceilings between 1-25 mm




01. Select version



CLOUD



DAM - Microprismatic diffuser



UGR	W	lm output	lm/W	□	CODE*
≤19	41	4370	107	582x582	90840L060▼W●◆♣
≤22	47	5376	114	582x582	90839L060▼W●◆♣

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3


Colour temp.	◆
3000K	3
4000K	0

Connector	♣
No connector	00
W3M ²	W3
W5MD ³	W5

02. Select options

Product details

OPTIONS	Code
Steel safety cable L1500 mm	955000
Air handling • Under request.	
Bespoke projects • Under request.	

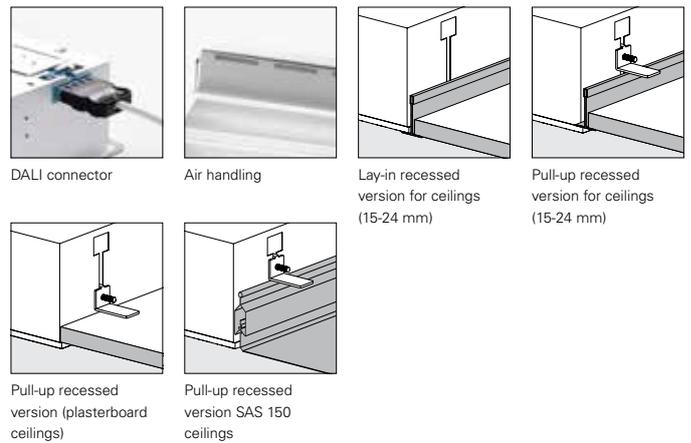

¹ Prepared for emergency remote control.

² 3-pole Wieland GST18i3 male connector.

³ 5-pole Wieland GST18i5 DIM male connector.