CORA

Product characteristics

Body
Steel sheet

Finish
Powder coated

Optical system
bOPTICS - Symmetric reflector

Light source
LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime
80.000h @ L90, B10, Ta 25°C

Control gear
LED driver 220-240V-50/60Hz included

CE RoHS

230V/50Hz

IP 20

650°C

01. Select version

CORA 2



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	Lmm	CODE*
≤10	18	2272	126	597	90727L260♥♠●♦00
≤10	30	3779	126	897	90727L290♥♠●♦00
≤10	39	5286	136	1197	90727L212♥♠●♦00
≤10	50	6816	136	1497	90727L215♥♠●♦00

CORA 3



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	CODE*
≤10	26	3408	131	90727Q360♥♠●♦00

CORA 4



bOPTICS - Symmetric reflector 48°



UGR	W	lm output	lm/W	CODE*
≤10	34	4544	134	90727Q460♥♠●♦00

CORA 2 | CORA 3 | CORA 4

- To complete the product add the suspension, current supply cable and ceiling rose. Please order separately.

***Replace the symbols to complete the code**

Control gear	♥
HF	E
DALI	H

Colour	♠
☐ White	W
■ Black	B

Emergency	●
No EM	0
EM 3h (K3) [1]	3

Colour temp.	♦
3000K	3
4000K	0

[1] Prepared for emergency remote control.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm²	940400
L1500 mm - 5 x 0,75 mm²	940500
L1500 mm - 7 x 0,75 mm²	940600
L3000 mm - 3 x 0,75 mm²	940401
L3000 mm - 5 x 0,75 mm²	940501
L3000 mm - 7 x 0,75 mm²	940601
L6000 mm - 3 x 0,75 mm²	940402
L6000 mm - 5 x 0,75 mm²	940507
L6000 mm - 7 x 0,75 mm²	940602
• For the option DALI with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm².	
Ceiling rose	
Surface mounted T25 45 I ⊠ 100	978610♠
Surface mounted T29 (DALI+K3)	978611♠
Recessed T7 Ø70 35 I ⊠ 90	971400♠
Recessed T59 (DALI+K3)	971410♠
Low Output version	
• Under request.	

***Replace the symbols to complete the code**

Colour	♠
☐ White	W
■ Black	B

Product details

Suspended application

bOPTICS diffuser

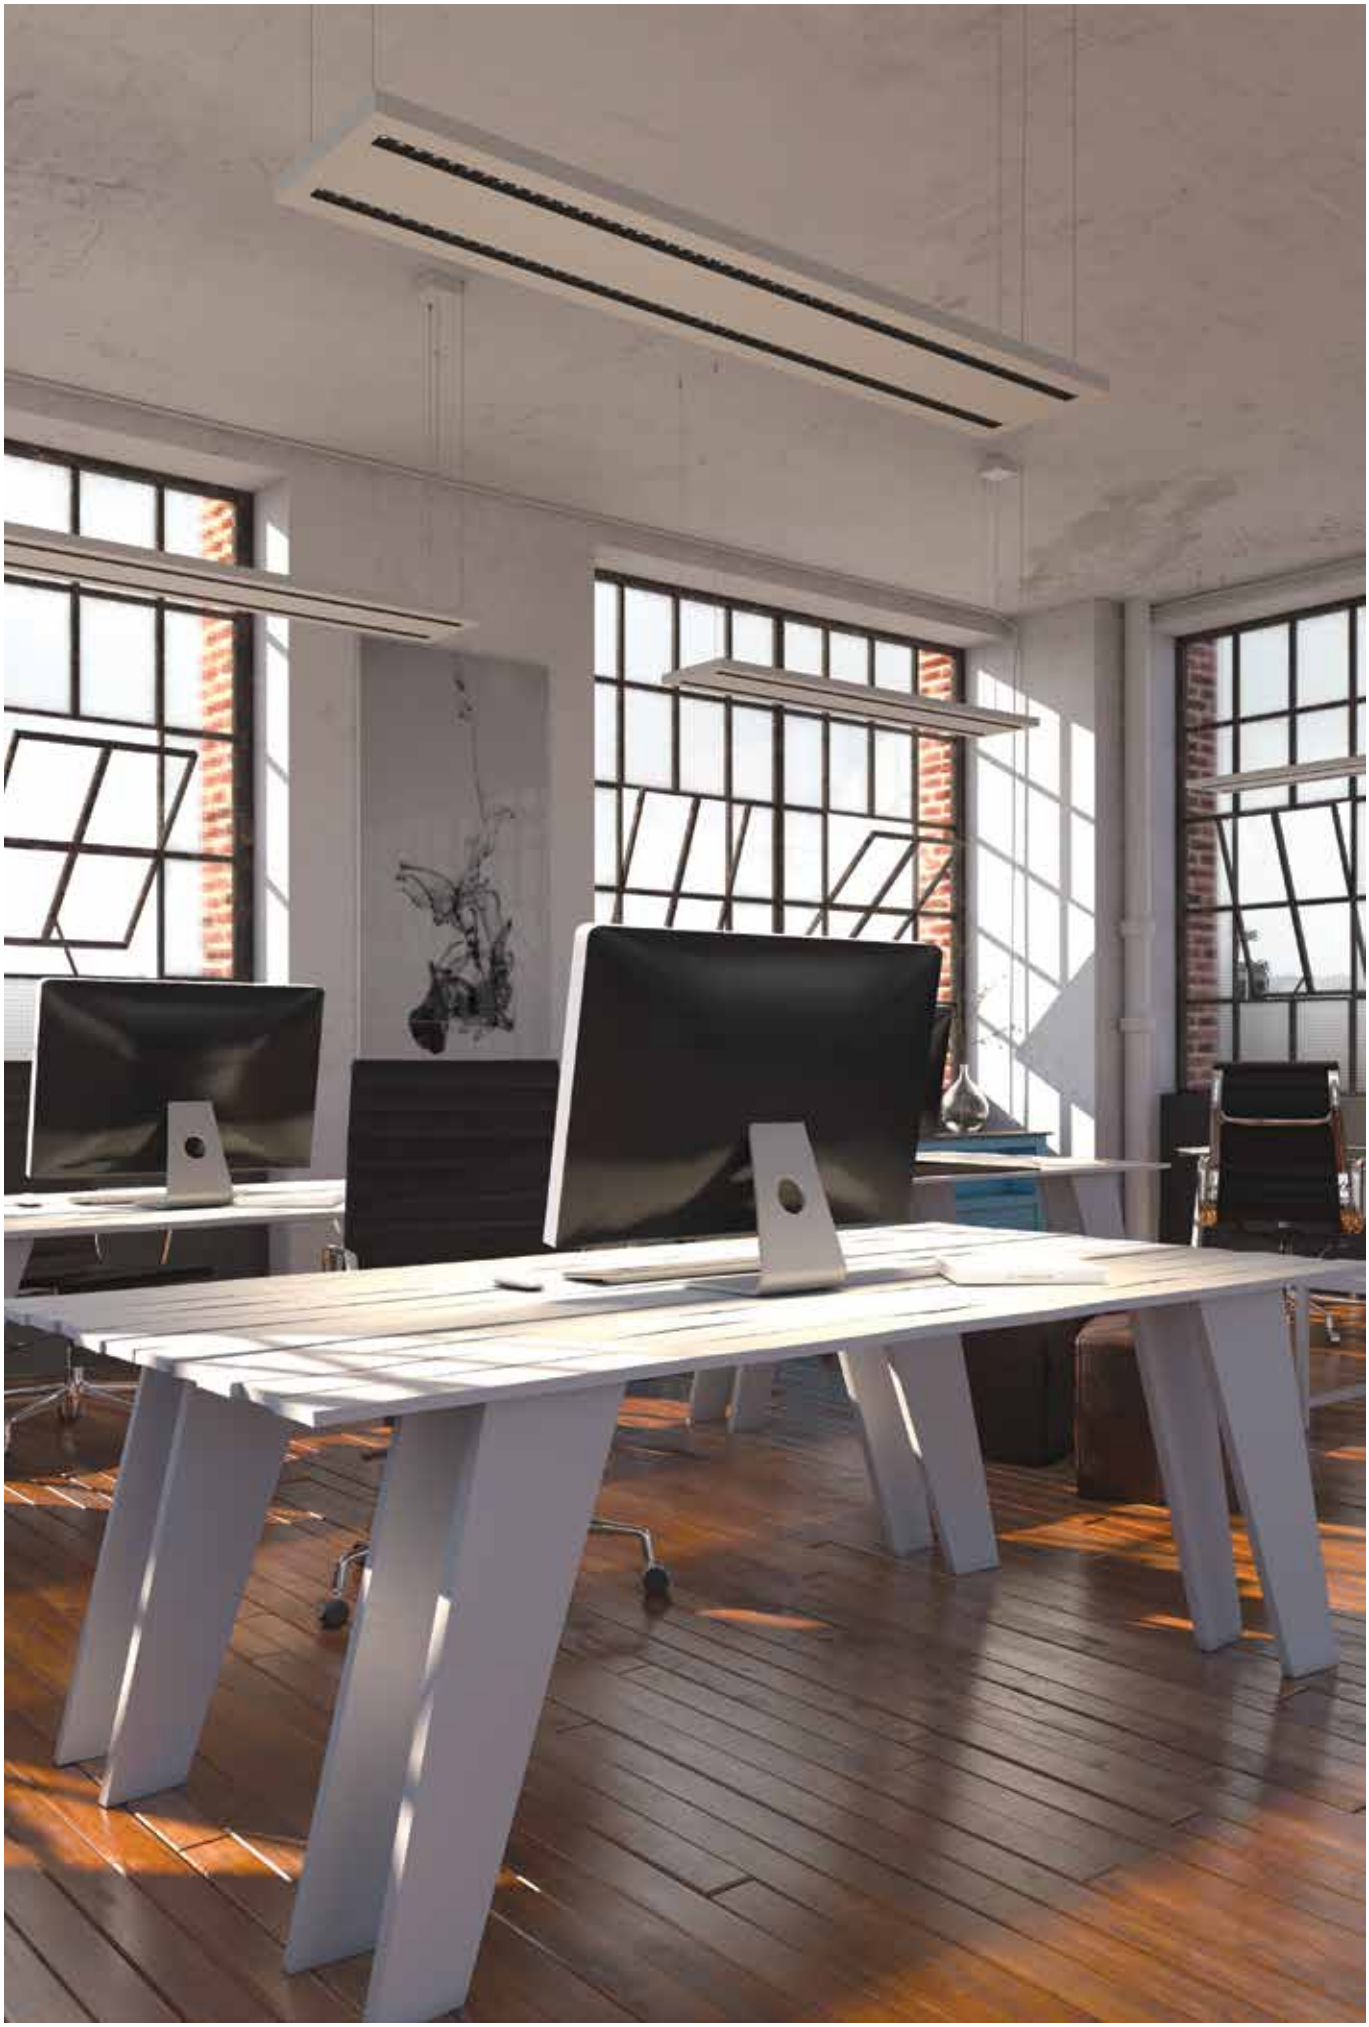
Ceiling roses