



Architectural
lighting

OREO



OREO /C
214



OREO In
216



OREO Out
220



OREO V In
224



OREO V Out
228




OREO Linea Down
232




OREO Linea Up
236



Application types

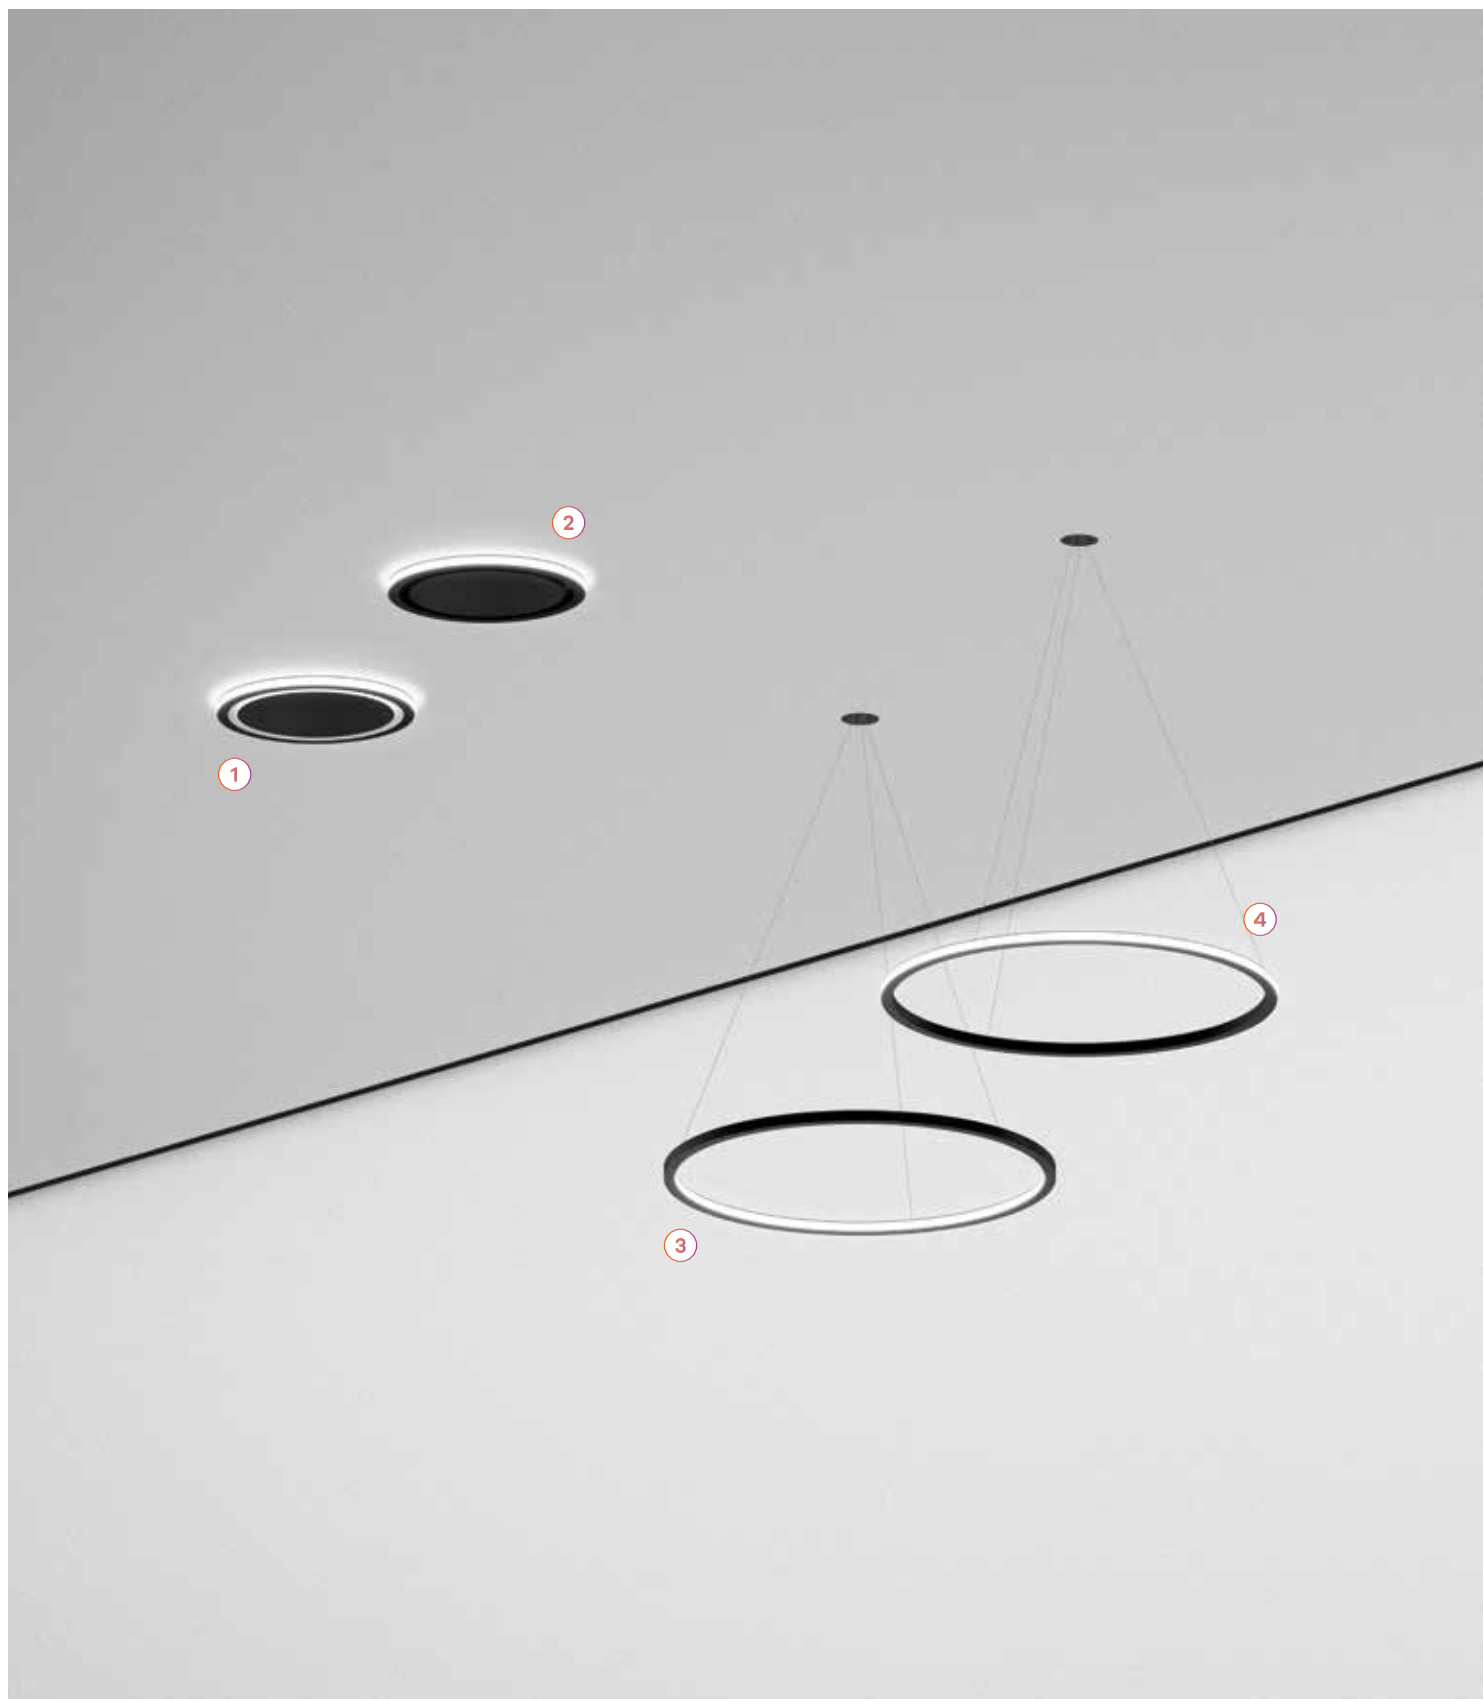

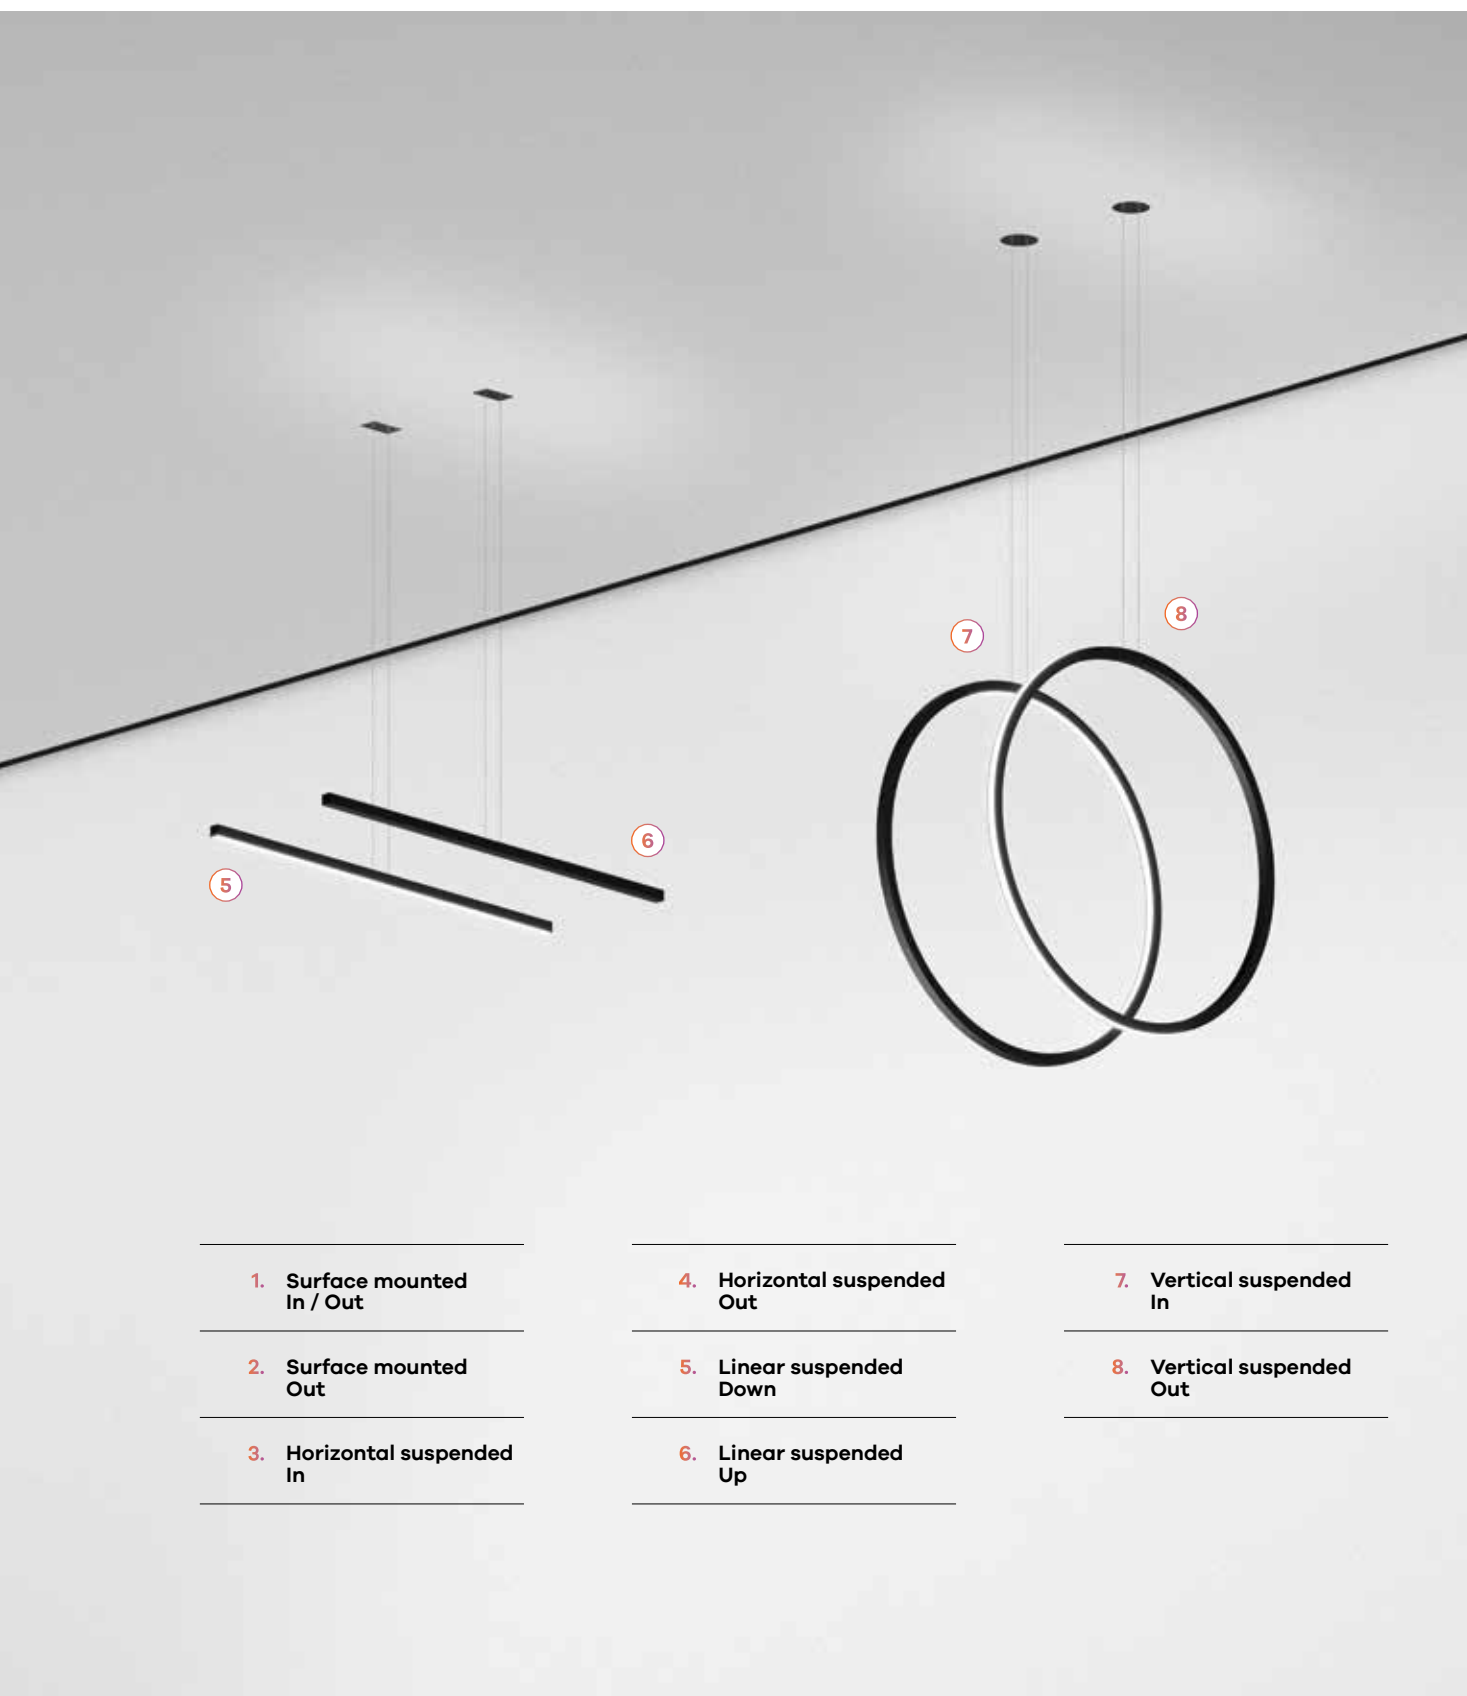

1. Surface mounted
In / Out

2. Surface mounted
Out

3. Horizontal suspended
In

4. Horizontal suspended
Out


5. Linear suspended
Down

6. Linear suspended
Up

7. Vertical suspended
In

8. Vertical suspended
Out

Minimalism and technology

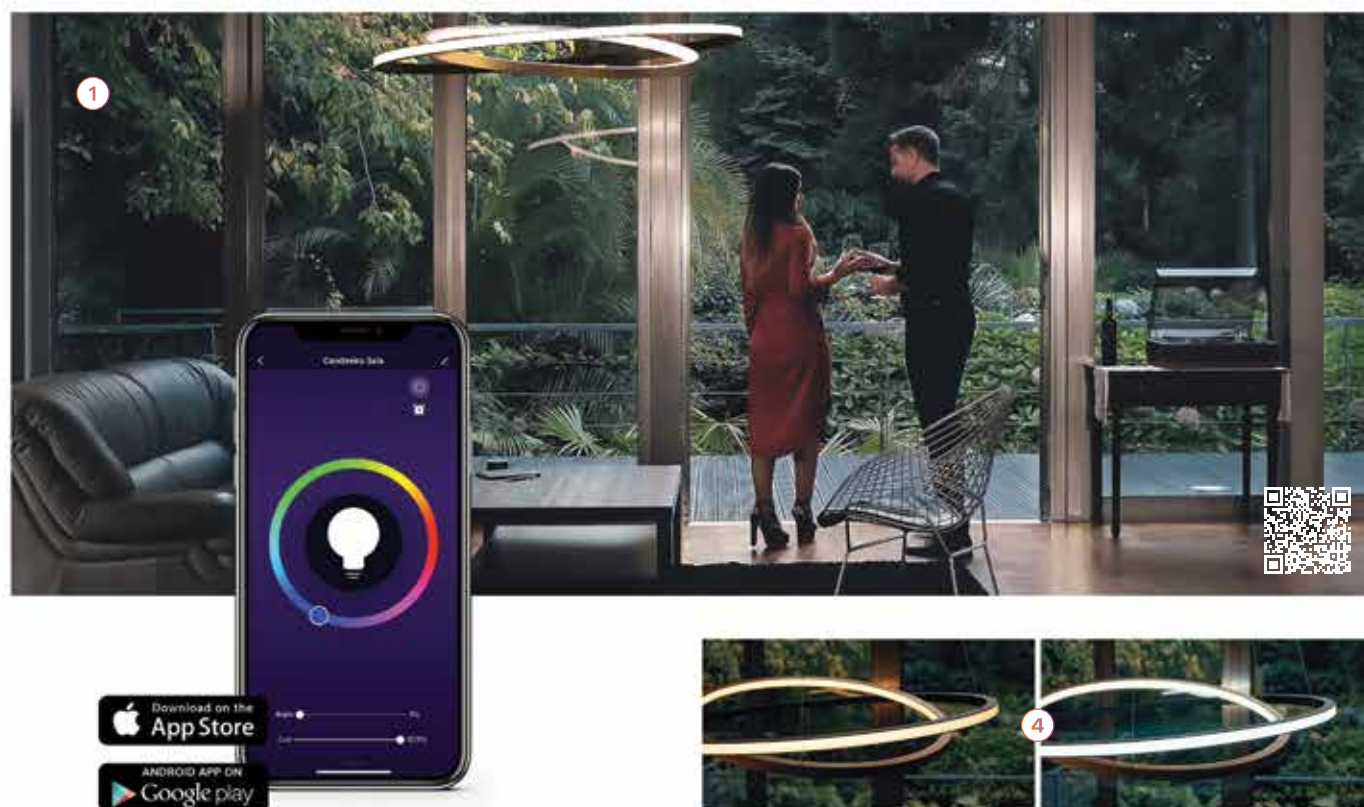

1. OmniaControl (VOICE & APP Tuya Smart)

Through the OmniaControl module installed in the luminaires and using voice control devices from Amazon Echo, Google Home or the Tuya Smart App, you can control all your smart lighting.

2. Body

Seamlessly welded aluminium profile, available in 12 colours.

3. LED

SDCM MacAdam ≤ 3 , 2700K / 3000K colour temperature, CRI > 90 and 60.000h lifetime L80 B10.

4. Tunable White & RGB White

Tunable White versions available with a white light spectrum from 3000K to 5700K. The RGB White versions are also available.

5. bLINE

High-tech clip-in optical system with opal diffuser (bLINE) for high visual comfort lighting.


6. The suspensions are also the current supply cable

The suspensions with a standard length of 1500 mm also work as a power supply cable, providing a "cleaner" look to your space.


7. Ceiling rose

Trimless recessed, recessed with trim or surface-mounted ceiling roses available in white or black colour.

Optical system


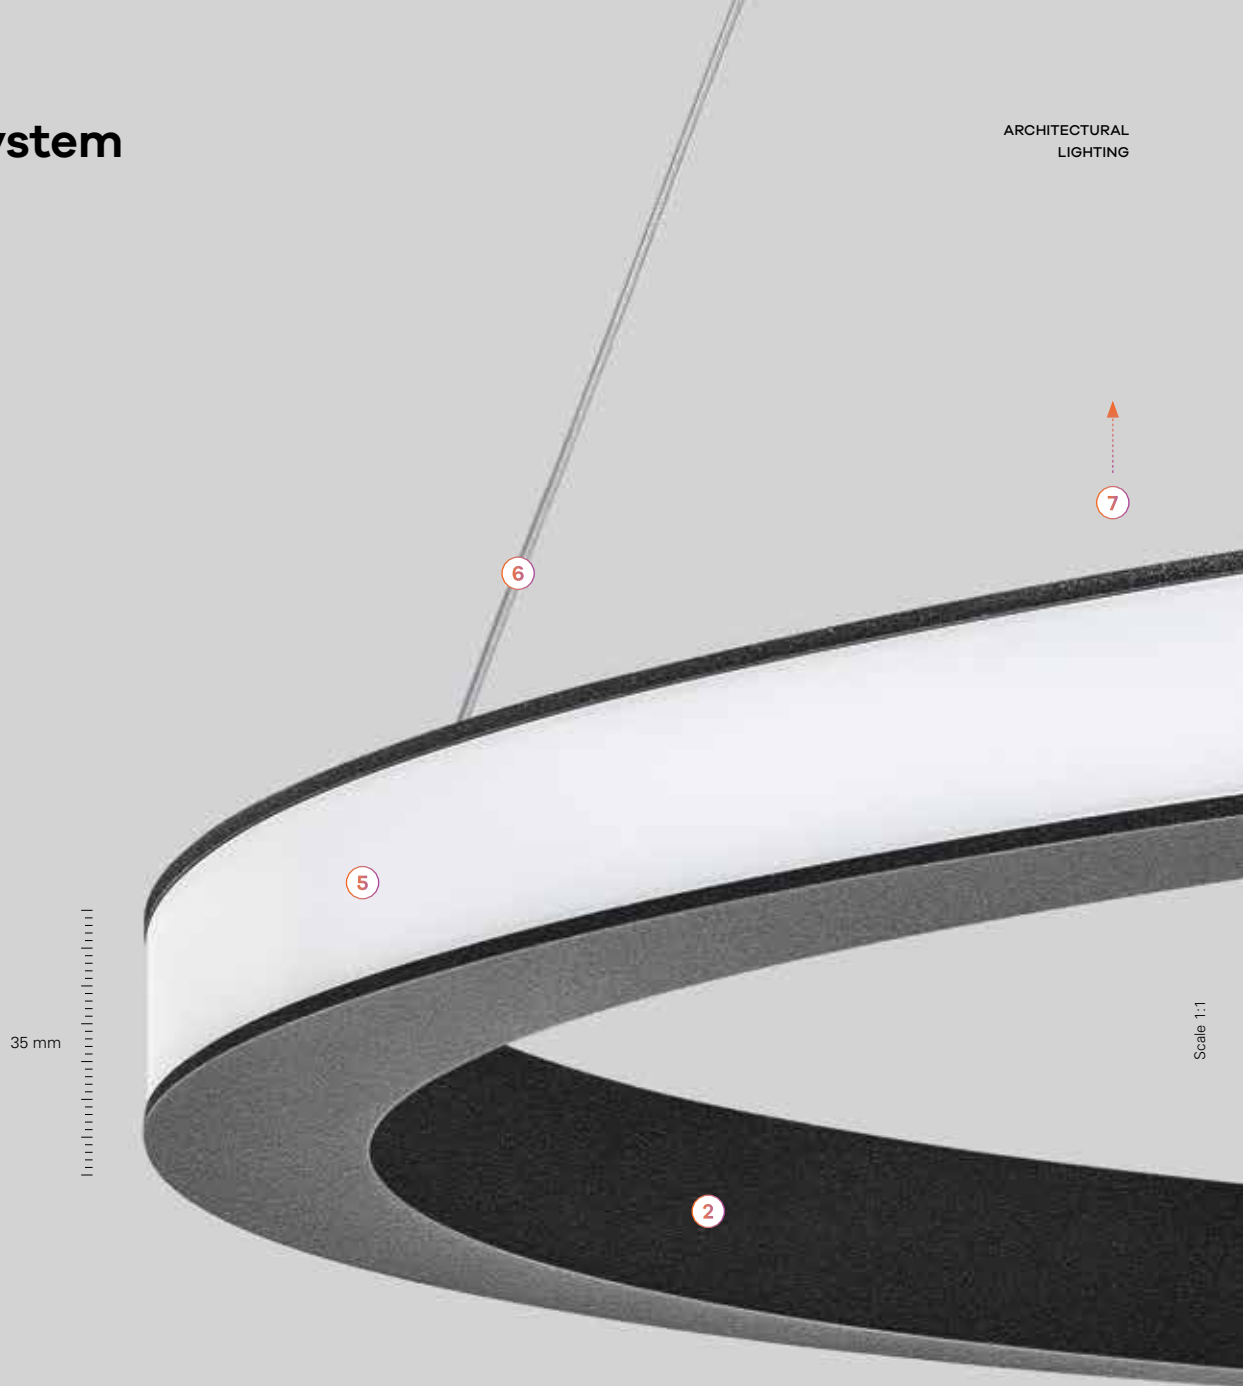
ARCHITECTURAL
LIGHTING

5. bLINE



Define your colour

ARCHITECTURAL
LIGHTING





OREO /C



Product
characteristics


Body
Aluminium
Finish
Powder coated
Optical system
bLINE - Opal diffuser
Light source
LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime
60.000h @ L80, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included




01. Select version




OREO /C

45 | 35 |  Ø630

In/Out | bLINE - Opal diffuser

W
51lm
output
1697lm/W
33CODE*
90423L630▼▲●●00

Out | bLINE - Opal diffuser

W
31lm
output
1100lm/W
35CODE*
90422L630▼▲●●00

*Replace the symbols to complete the code

Control gear ▼

HF	E
DALI	H
SwitchDIM ¹	O
OC	T

Colour ² ▲

☐ White	W
☐ Grey	G
☐ Black	B
☐ Sahara	0
☐ Mist	1
☐ Carbon	I
☐ Autumn	L
☐ Rusty chain	R
☐ Jungle	N
☐ Golden eye	D
☐ Old rose	5
☐ Copper	7

Colour temp. ●

2700K	2
3000K	3
4000K	0
Tunable White ³	T
RGB White ⁴	R



Product details



bLINE diffuser



Clip-in diffuser

¹ Only available for In/Out versions of 2700K, 3000K or 4000K.

² See page 212.

³ Tunable White (3000K - 5700K). Only available with OC OmniaControl Driver.

⁴ RGB White (2700K). Only available with OC OmniaControl Driver.

OREO In




Product characteristics

Body Aluminium	
Finish Powder coated	
Optical system bLINE - Opal diffuser	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 60.000h @ L80, B10, Ta 25°C	
Control gear Not included	


CE	RoHS
24V DC	III
IP 40	850°C

01. Select version

OREO In



bLINE - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
26	1378	53	Ø650	90400L6500▲0◆00
38	2067	54	Ø970	90400L9700▲0◆00
50	2687	54	Ø1255	90400L1250▲0◆00
61	3307	54	Ø1540	90400L1540▲0◆00
78	4203	54	Ø1955	90400L1950▲0◆00

OREO In

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For RGB White versions, the product must include a transparent current supply cable.



*Replace the symbols to complete the code

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.

² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.

³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose



Trimless

50 I  Ø120

 Ø128

HF

	CODE*
Ø650	975800♣
Ø970, Ø1255	975801♣
Ø1540, Ø1955	975803♣

DALI

	CODE*
Ø650	975900♣
Ø970, Ø1255	975901♣
Ø1540, Ø1955	975903♣

OmniaControl

	CODE*
Ø650	976000♣
Ø970, Ø1255	976001♣
Ø1540, Ø1955	976003♣

RGB White + OmniaControl

	CODE*
Ø650, Ø970	976005♣
Ø1255	976007♣
Ø1540	976008♣
Ø1955	976009♣

Tunable White + OmniaControl

	CODE*
Ø650, Ø970	976010♣
Ø1255	976012♣
Ø1540	976013♣
Ø1955	976014♣

Recessed

82 I  Ø150

 Ø128

HF

	CODE*
Ø650	975500♣
Ø970, Ø1255	975501♣
Ø1540, Ø1955	975503♣

DALI

	CODE*
Ø650	975600♣
Ø970, Ø1255	975601♣
Ø1540, Ø1955	975603♣

OmniaControl

	CODE*
Ø650	975700♣
Ø970, Ø1255	975701♣
Ø1540, Ø1955	975703♣

RGB White + OmniaControl

	CODE*
Ø650, Ø970	975705♣
Ø1255	975707♣
Ø1540	975708♣
Ø1955	975709♣

Tunable White + OmniaControl

	CODE*
Ø650, Ø970	975710♣
Ø1255	975712♣
Ø1540	975713♣
Ø1955	975714♣

Surface mounted

41,5 I  Ø400

HF

	CODE*
Ø650	975200♣
Ø970, Ø1255	975201♣
Ø1540, Ø1955	975203♣

DALI

	CODE*
Ø650	975300♣
Ø970, Ø1255	975301♣
Ø1540, Ø1955	975303♣

OmniaControl

	CODE*
Ø650	975400♣
Ø970, Ø1255	975401♣
Ø1540, Ø1955	975403♣

RGB White + OmniaControl

	CODE*
Ø650, Ø970	975405♣
Ø1255	975407♣
Ø1540	975408♣
Ø1955	975409♣

Tunable White + OmniaControl

	CODE*
Ø650, Ø970	975410♣
Ø1255	975412♣
Ø1540	975413♣
Ø1955	975414♣

*Replace the symbols to complete the code

Colour	
☐ White	W
☐ Black	B

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.



Product details




bLINE diffuser



Clip-in diffuser



Trimless recessed ceiling rose



Recessed ceiling rose



Surface ceiling rose



Photo: Pedro Sampayo Ribeiro

OREO Out




Product characteristics

Body Aluminium	
Finish Powder coated	
Optical system bLINE - Opal diffuser	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 60.000h @ L80, B10, Ta 25°C	
Control gear Not included	


CE	RoHS
24V DC	III
IP 40	850°C

01. Select version

OREO Out



bLINE - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
23	1310	57	Ø630	90401L6300▲0◆00
36	2038	57	Ø950	90401L9500▲0◆00
49	2766	56	Ø1270	90401L1270▲0◆00
60	3422	57	Ø1555	90401L1550▲0◆00
77	4368	57	Ø1970	90401L1970▲0◆00

OREO Out

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For RGB White versions, the product must include a transparent current supply cable.



*Replace the symbols to complete the code

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.

² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.

³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose



Trimless

50 | Ø120

Ø128

HF

	CODE*
Ø630	975800
Ø950, Ø1270	975801
Ø1555, Ø1970	975803

DALI

	CODE*
Ø630	975900
Ø950, Ø1270	975901
Ø1555, Ø1970	975903

OmniaControl

	CODE*
Ø630	976000
Ø950, Ø1270	976001
Ø1555, Ø1970	976003

RGB White + OmniaControl

	CODE*
Ø630, Ø950	976005
Ø1270	976007
Ø1555	976008
Ø1970	976009

Tunable White + OmniaControl

	CODE*
Ø630, Ø950	976010
Ø1270	976012
Ø1555	976013
Ø1970	976014

Recessed

82 | Ø150

Ø128

HF

	CODE*
Ø630	975500
Ø950, Ø1270	975501
Ø1555, Ø1970	975503

DALI

	CODE*
Ø630	975600
Ø950, Ø1270	975601
Ø1555, Ø1970	975603

OmniaControl

	CODE*
Ø630	975700
Ø950, Ø1270	975701
Ø1555, Ø1970	975703

RGB White + OmniaControl

	CODE*
Ø630, Ø950	975705
Ø1270	975707
Ø1555	975708
Ø1970	975709

Tunable White + OmniaControl

	CODE*
Ø630, Ø950	975710
Ø1270	975712
Ø1555	975713
Ø1970	975714

Surface mounted

41,5 | Ø400

HF

	CODE*
Ø630	975200
Ø950, Ø1270	975201
Ø1555, Ø1970	975203

DALI

	CODE*
Ø630	975300
Ø950, Ø1270	975301
Ø1555, Ø1970	975303

OmniaControl

	CODE*
Ø630	975400
Ø950, Ø1270	975401
Ø1555, Ø1970	975403

RGB White + OmniaControl

	CODE*
Ø630, Ø950	975405
Ø1270	975407
Ø1555	975408
Ø1970	975409

Tunable White + OmniaControl

	CODE*
Ø630, Ø950	975410
Ø1270	975412
Ø1555	975413
Ø1970	975414

*Replace the symbols to complete the code

Colour	
White	W
Black	B

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.




Product details



bLINE diffuser



Clip-in diffuser



Trimless recessed ceiling rose



Recessed ceiling rose



Surface ceiling rose



OREO V In



Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bLINE - Opal diffuser

Light source

LED, RG1, CRI>90, MacAdam Step ≤3

LED lifetime

60.000h @ L80, B10, Ta 25°C

Control gear


Not included




01. Select version



OREO V In



bLINE - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
26	1378	53	Ø650	90425L6500▲0◆00
38	2067	54	Ø970	90425L9700▲0◆00
50	2687	54	Ø1255	90425L1250▲0◆00
61	3307	54	Ø1540	90425L1540▲0◆00
78	4203	54	Ø1955	90425L1950▲0◆00

OREO V In

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For Ø1540 and Ø1955 mm versions, the product must include a transparent power cable.
- For Tunable White and RGB White versions, the product must include a transparent current supply cable.

*Replace the symbols to complete the code

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7


Colour temp.	◆
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.

² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.

³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose

Trimless	Recessed	Surface mounted
 50 Ø120 Ø128	 82 Ø150 Ø128	 a) 270 135 44 b) 320 145 44
HF	HF	HF
CODE* Ø650 976700 Ø970, Ø1255 976701 Ø1540, Ø1955 976703	CODE* Ø650 976400 Ø970, Ø1255 976401 Ø1540, Ø1955 976403	CODE* Ø650 ^{a)} 976100 Ø970, Ø1255 ^{a)} 976101 Ø1540, Ø1955 ^{b)} 976103
DALI	DALI	DALI
CODE* Ø650 976800 Ø970, Ø1255 976801 Ø1540, Ø1955 976803	CODE* Ø650 976500 Ø970, Ø1255 976501 Ø1540, Ø1955 976503	CODE* Ø650 ^{a)} 976200 Ø970, Ø1255 ^{a)} 976201 Ø1540, Ø1955 ^{b)} 976203
OmniaControl	OmniaControl	OmniaControl
CODE* Ø650 976900 Ø970, Ø1255 976901 Ø1540, Ø1955 976903	CODE* Ø650 976600 Ø970, Ø1255 976601 Ø1540, Ø1955 976603	CODE* Ø650 ^{a)} 976300 Ø970, Ø1255 ^{a)} 976301 Ø1540, Ø1955 ^{b)} 976303
RGB White + OmniaControl	RGB White + OmniaControl	RGB White + OmniaControl
CODE* Ø650, Ø970 976905 Ø1255, Ø1540 976907 Ø1955 976909	CODE* Ø650, Ø970 976605 Ø1255, Ø1540 976607 Ø1955 976609	CODE* Ø650, Ø970 ^{a)} 976305 Ø1255 ^{a)} 976307 Ø1540 ^{b)} 976308 Ø1955 ^{b)} 976309
Tunable White + OmniaControl	Tunable White + OmniaControl	Tunable White + OmniaControl
CODE* Ø650, Ø970 976910 Ø1255, Ø1540 976912 Ø1955 976914	CODE* Ø650, Ø970 976610 Ø1255, Ø1540 976612 Ø1955 976614	CODE* Ø650, Ø970 ^{a)} 976310 Ø1255 ^{a)} 976312 Ø1540 ^{b)} 976313 Ø1955 ^{b)} 976314




*Replace the symbols to complete the code

Colour	
□ White	W
■ Black	B

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.

Product details

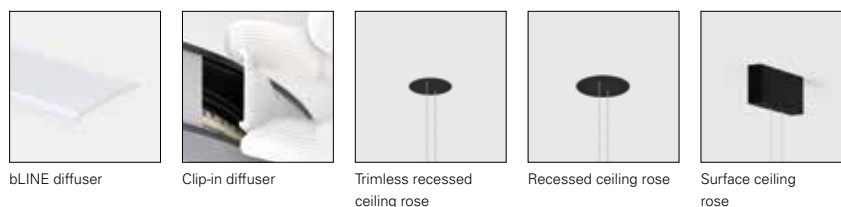


bLINE diffuser

Clip-in diffuser

Trimless recessed ceiling rose

Recessed ceiling rose

Surface ceiling rose

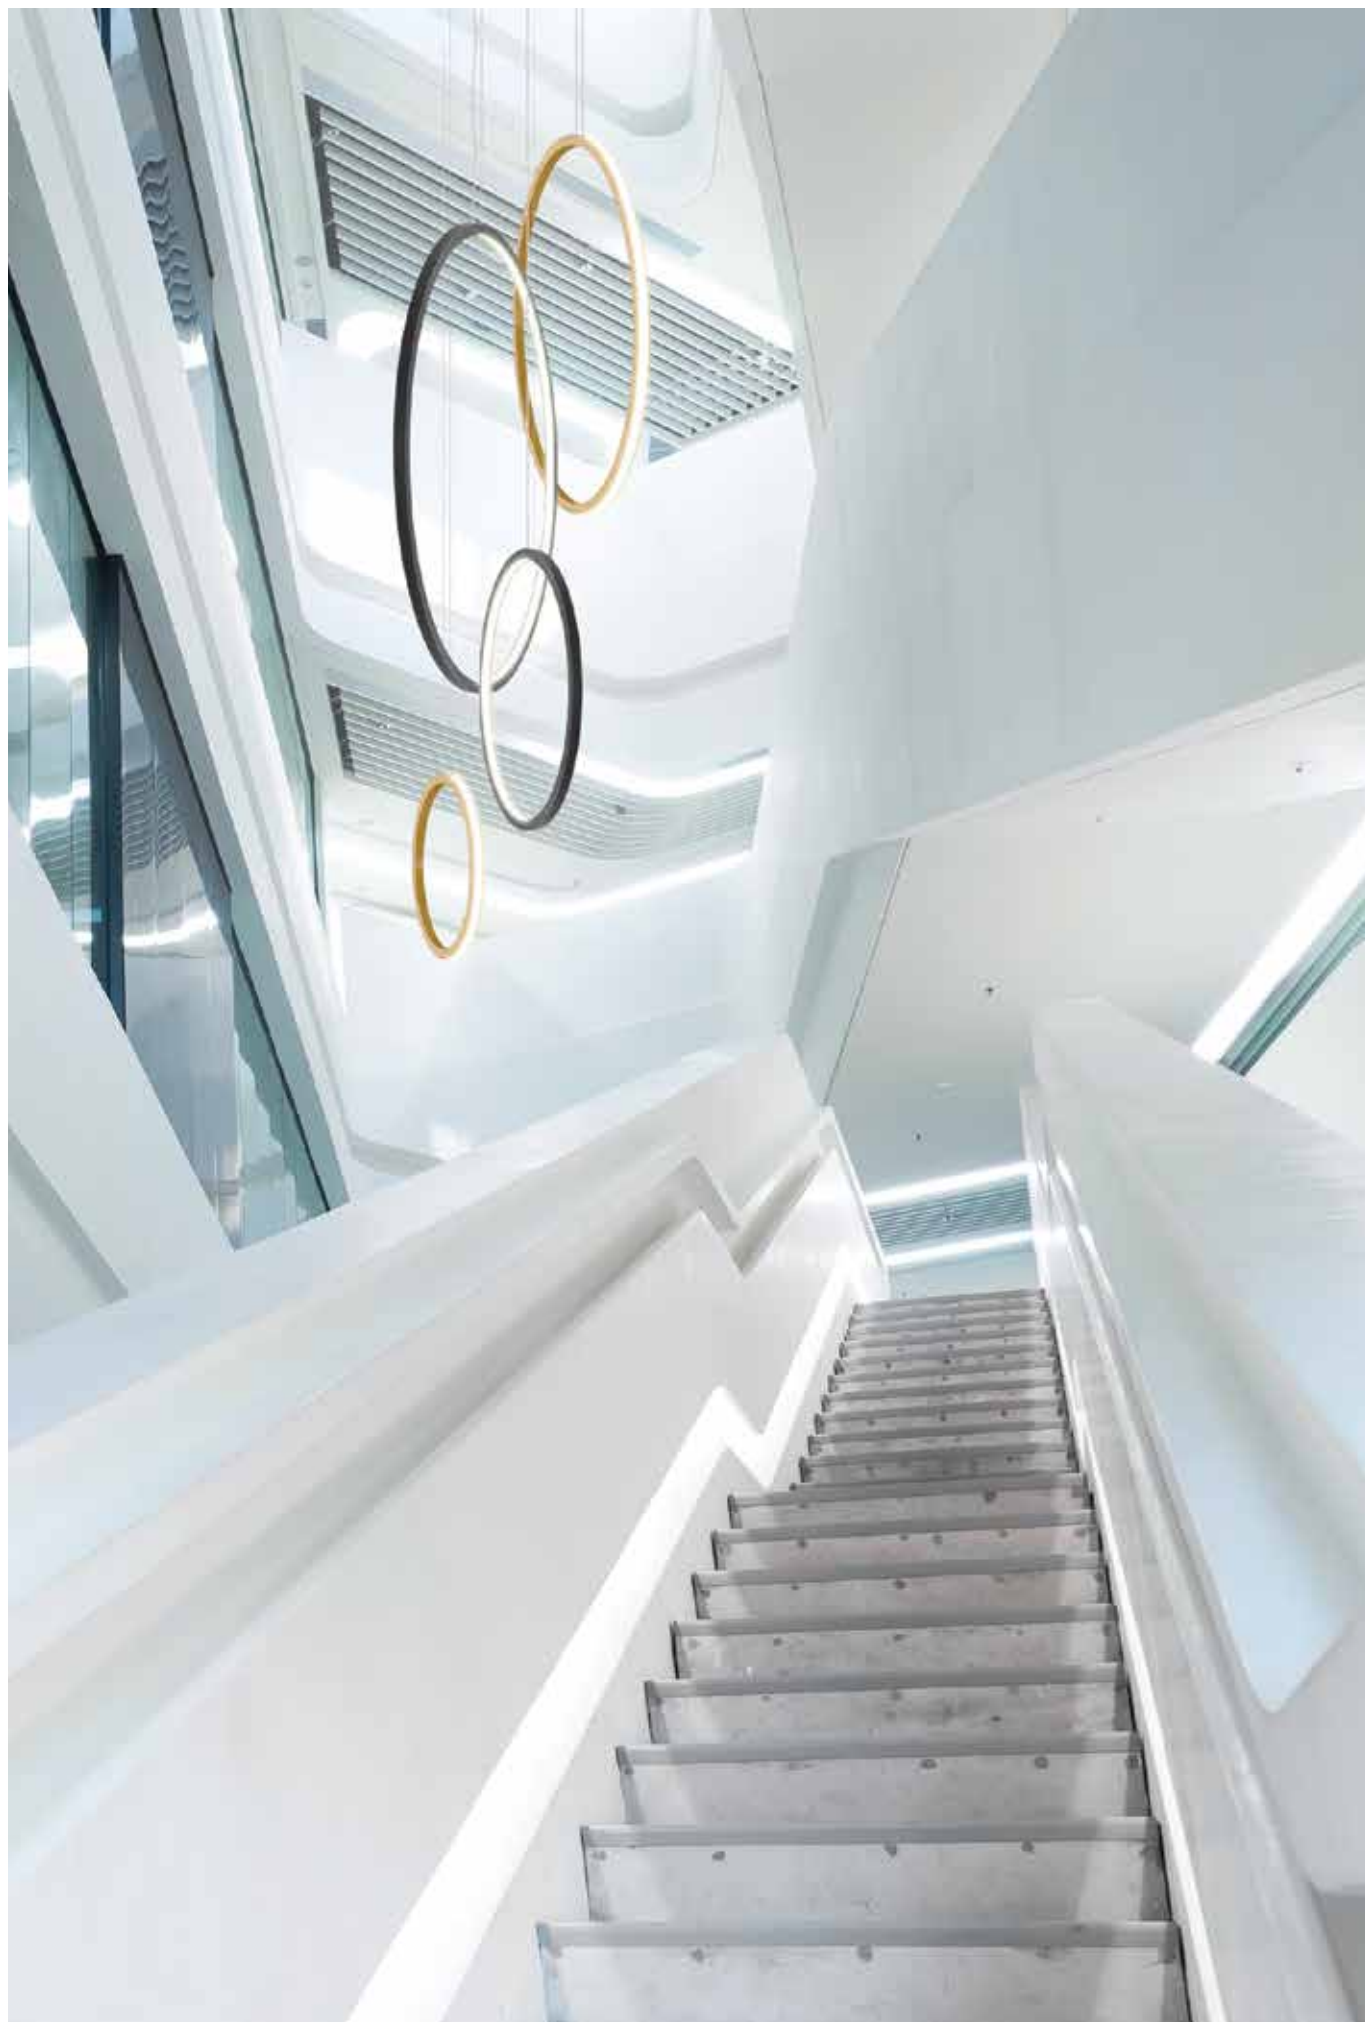

OREO V Out



Product
characteristics


Body Aluminium
Finish Powder coated
Optical system bLINE - Opal diffuser
Light source LED, RG1, CRI>90, MacAdam Step ≤3
LED lifetime 60.000h @ L80, B10, Ta 25°C
Control gear Not included

CE	RoHS
24V DC	III
IP 40	850°C


01. Select version



OREO V Out



bLINE - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
22	1238	56	Ø630	90419L6300▲0♦00
35	1966	56	Ø950	90419L9500▲0♦00
47	2694	57	Ø1270	90419L1270▲0♦00
59	3349	57	Ø1555	90419L1550▲0♦00
76	4295	57	Ø1970	90419L1970▲0♦00

OREO V Out

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For Ø1555 and Ø1970 mm versions, the product must include a transparent power cable.
- For Tunable White and RGB White versions, the product must include a transparent current supply cable.

*Replace the symbols to complete the code

Colour ¹	▲
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	♦
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.

² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.

³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose

Trimless

50 |  Ø120

• Ø128

HF

	CODE*
Ø630	976700♣
Ø950, Ø1270	976701♣
Ø1555, Ø1970	976703♣

DALI

	CODE*
Ø630	976800♣
Ø950, Ø1270	976801♣
Ø1555, Ø1970	976803♣

OmniaControl

	CODE*
Ø630	976900♣
Ø950, Ø1270	976901♣
Ø1555, Ø1970	976903♣

RGB White + OmniaControl

	CODE*
Ø630, Ø950	976905♣
Ø1270, Ø1555	976907♣
Ø1970	976909♣

Tunable White + OmniaControl

	CODE*
Ø630, Ø950	976910♣
Ø1270, Ø1555	976912♣
Ø1970	976914♣

Recessed

82 |  Ø150

• Ø128

HF

	CODE*
Ø630	976400♣
Ø950, Ø1270	976401♣
Ø1555, Ø1970	976403♣

DALI

	CODE*
Ø630	976500♣
Ø950, Ø1270	976501♣
Ø1555, Ø1970	976503♣

OmniaControl

	CODE*
Ø630	976600♣
Ø950, Ø1270	976601♣
Ø1555, Ø1970	976603♣

RGB White + OmniaControl

	CODE*
Ø630, Ø950	976605♣
Ø1270, Ø1555	976607♣
Ø1970	976609♣

Tunable White + OmniaControl

	CODE*
Ø630, Ø950	976610♣
Ø1270, Ø1555	976612♣
Ø1970	976614♣

Surface mounted

a) 270
135 |  44
b) 320
145 |  44

HF

	CODE*
Ø630 ^{a)}	976100♣
Ø950, Ø1270 ^{a)}	976101♣
Ø1555, Ø1970 ^{b)}	976103♣

DALI

	CODE*
Ø630 ^{a)}	976200♣
Ø950, Ø1270 ^{a)}	976201♣
Ø1555, Ø1970 ^{b)}	976203♣

OmniaControl

	CODE*
Ø630 ^{a)}	976300♣
Ø950, Ø1270 ^{a)}	976301♣
Ø1555, Ø1970 ^{b)}	976303♣

RGB White + OmniaControl

	CODE*
Ø630, Ø950 ^{a)}	976305♣
Ø1270 ^{a)}	976307♣
Ø1555 ^{b)}	976308♣
Ø1970 ^{b)}	976309♣

Tunable White + OmniaControl

	CODE*
Ø630, Ø950 ^{a)}	976310♣
Ø1270 ^{a)}	976312♣
Ø1555 ^{b)}	976313♣
Ø1970 ^{b)}	976314♣



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Black	B

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.




Product details




bLINE diffuser




Clip-in diffuser



Trimless recessed ceiling rose



Recessed ceiling rose



Surface ceiling rose



OREO Linea Down



Product characteristics


Body Aluminium	
Finish Powder coated	
Optical system bLINE - Opal diffuser	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 60.000h @ L80, B10, Ta 25°C	
Control gear Not included	

CE	RoHS
24V DC	III
IP 40	850°C


01. Select version



OREO Linea Down



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
13	637	49	1014	90420L10100000
19	956	50	1514	90420L15100000
26	1274	49	2014	90420L20100000

OREO Linea Down

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For Tunable White and RGB White versions, the product must include a transparent current supply cable.

*Replace the symbols to complete the code

Colour ¹	◆
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.
² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.
³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose

Trimless	Recessed	Surface mounted
		
122x62	154x68	
HF	HF	HF
CODE*	CODE*	CODE*
L1014, L1514, L2014 977600♣	L1014, L1514, L2014 977300♣	L1014, L1514, L2014 977900♣
DALI	DALI	DALI
CODE*	CODE*	CODE*
L1014, L1514, L2014 977700♣	L1014, L1514, L2014 977400♣	L1014, L1514, L2014 978000♣
OmniaControl	OmniaControl	OmniaControl
CODE*	CODE*	CODE*
L1014, L1514, L2014 977800♣	L1014, L1514, L2014 977500♣	L1014, L1514, L2014 978100♣
RGB White + OmniaControl	RGB White + OmniaControl	RGB White + OmniaControl
CODE*	CODE*	CODE*
L1014, L1514 977805♣ L2014 977806♣	L1014, L1514 977505♣ L2014 977506♣	L1014, L1514 978105♣ L2014 978106♣
Tunable White + OmniaControl	Tunable White + OmniaControl	Tunable White + OmniaControl
CODE*	CODE*	CODE*
L1014, L1514 977810♣ L2014 977811♣	L1014, L1514 977510♣ L2014 977511♣	L1014, L1514 978110♣ L2014 978111♣

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.



*Replace the symbols to complete the code


Colour	♣
□ White	W
■ Black	B



Product details




bLINE diffuser



Trimless recessed ceiling rose



Recessed ceiling rose



Surface ceiling rose



OREO Linea Up



Product characteristics


Body Aluminium	
Finish Powder coated	
Optical system bLINE - Opal diffuser	
Light source LED, RG1, CRI>90, MacAdam Step ≤3	
LED lifetime 60.000h @ L80, B10, Ta 25°C	
Control gear Not included	


01. Select version



OREO Linea Up



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
12	573	48	1014	90399L1010▲0◆00
18	892	50	1514	90399L1510▲0◆00
24	1210	50	2014	90399L2010▲0◆00

OREO Linea Up

- Current supply cable/suspension with 1500 mm included.
- To complete the product add ceiling rose. Please order separately.
- For Tunable White and RGB White versions, the product must include a transparent current supply cable.

*Replace the symbols to complete the code

Colour ¹	◆
□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D
■ Old rose	5
■ Copper	7

Colour temp.	◆
2700K	2
3000K	3
4000K	0
Tunable White ²	T
RGB White ³	R

¹ See page 212.

² Tunable White (3000K - 5700K). Only available with ceiling rose TW + OmniaControl.

³ RGB White (2700K). Only available with ceiling rose RGB White + OmniaControl.

02. Select ceiling rose

Trimless



122x62

HF

CODE*

L1014, L1514, L2014 977600♣

DALI

CODE*

L1014, L1514, L2014 977700♣

OmniaControl

CODE*

L1014, L1514, L2014 977800♣

RGB White + OmniaControl

CODE*

L1014, L1514 977805♣
L2014 977806♣

Tunable White + OmniaControl

CODE*

L1014, L1514 977810♣
L2014 977811♣

Recessed



154x68

HF

CODE*

L1014, L1514, L2014 977300♣

DALI

CODE*

L1014, L1514, L2014 977400♣

OmniaControl

CODE*

L1014, L1514, L2014 977500♣

RGB White + OmniaControl

CODE*

L1014, L1514 977505♣
L2014 977506♣

Tunable White + OmniaControl

CODE*

L1014, L1514 977510♣
L2014 977511♣

Surface mounted



HF

CODE*

L1014, L1514, L2014 977900♣

DALI

CODE*

L1014, L1514, L2014 978000♣

OmniaControl

CODE*

L1014, L1514, L2014 978100♣

RGB White + OmniaControl

CODE*

L1014, L1514 978105♣
L2014 978106♣

Tunable White + OmniaControl

CODE*

L1014, L1514 978110♣
L2014 978111♣



*Replace the symbols to complete the code

Colour ♣
□ White W
■ Black B

CEILING ROSE

- Control gear included in the ceiling rose.
- The trimless recessed ceiling rose is class III.
- The surface ceiling rose is class I.



Product details



bLINE diffuser



Trimless recessed ceiling rose



Recessed ceiling rose



Surface ceiling rose

