


ROFY 60 Sq

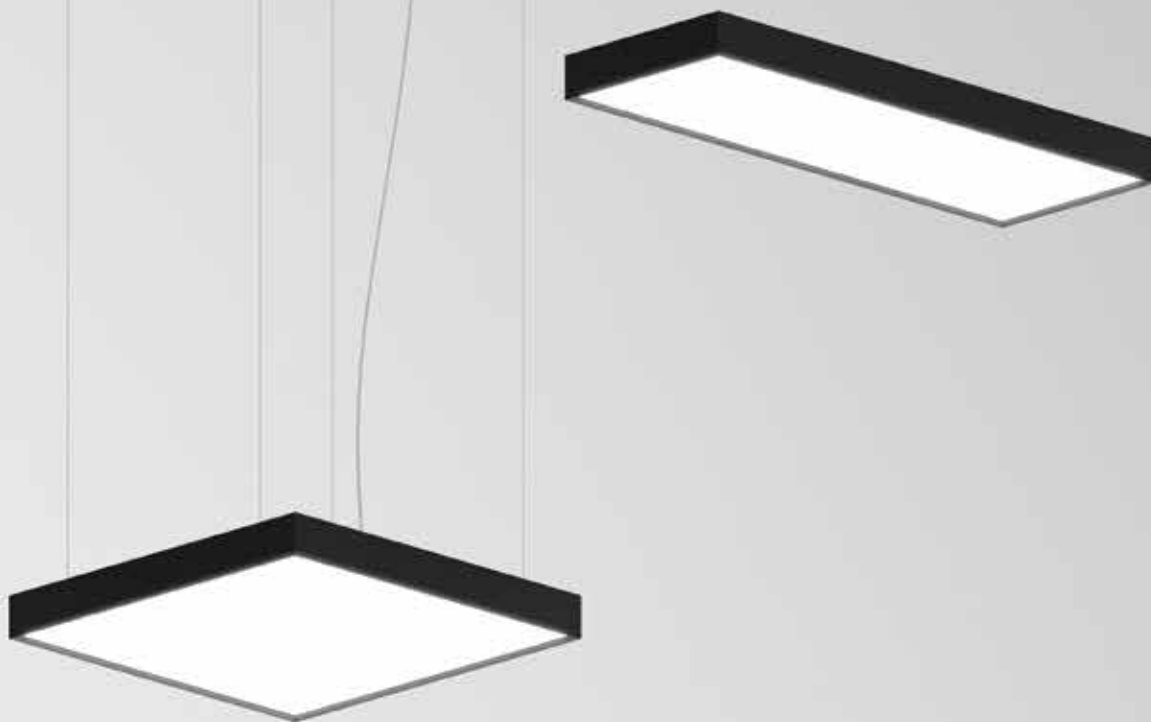

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40


K 04

650°C


01. Select version



ROFY 60 Sq




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤19	12	1478	123	286x286	90718L286▼▲0◆00
≤19	45	5913	131	550x550	90718L550▼▲◆◆00
≤19	25	2956	118	550x286	90718L552▼▲0◆00
≤19	36	4435	123	814x286	90718L812▼▲◆◆00
≤19	45	5913	131	1078x286	90718L102▼▲◆◆00
≤19	56	7391	132	1342x286	90718L132▼▲◆◆00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	12	1582	132	286x286	90720L286▼▲0◆00
≤22	45	6329	141	550x550	90720L550▼▲◆◆00
≤22	25	3165	127	550x286	90720L552▼▲0◆00
≤22	36	4747	132	814x286	90720L812▼▲◆◆00
≤22	45	6329	141	1078x286	90720L102▼▲◆◆00
≤22	56	7912	141	1342x286	90720L132▼▲◆◆00

ROFY 60 Sq

• For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D





Emergency	
No EM	0
EM 3h (K3) ²	3

Colour temp.	
3000K	3
4000K	0
Tunable White	T

¹ See page 164.

² Prepared for emergency remote control. Only available for the L550x550, L814, L1078 and L1342 mm versions.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
<ul style="list-style-type: none"> • For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm². 	
Ceiling rose	
Surface mounted T25  45  100	978610♣
Surface mounted T29 (DALI+K3)	978611♣
Recessed T7  Ø70 35  90	971400♣
Recessed T59 (DALI+K3)	971410♣
Low Output version	
<ul style="list-style-type: none"> • Under request. 	




*Replace the symbols to complete the code


Colour 
 White W
 Black B




Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses

