


## TTP 70 Colour




### Product characteristics

**Body**  
Polycarbonate tube and injected polycarbonate end caps

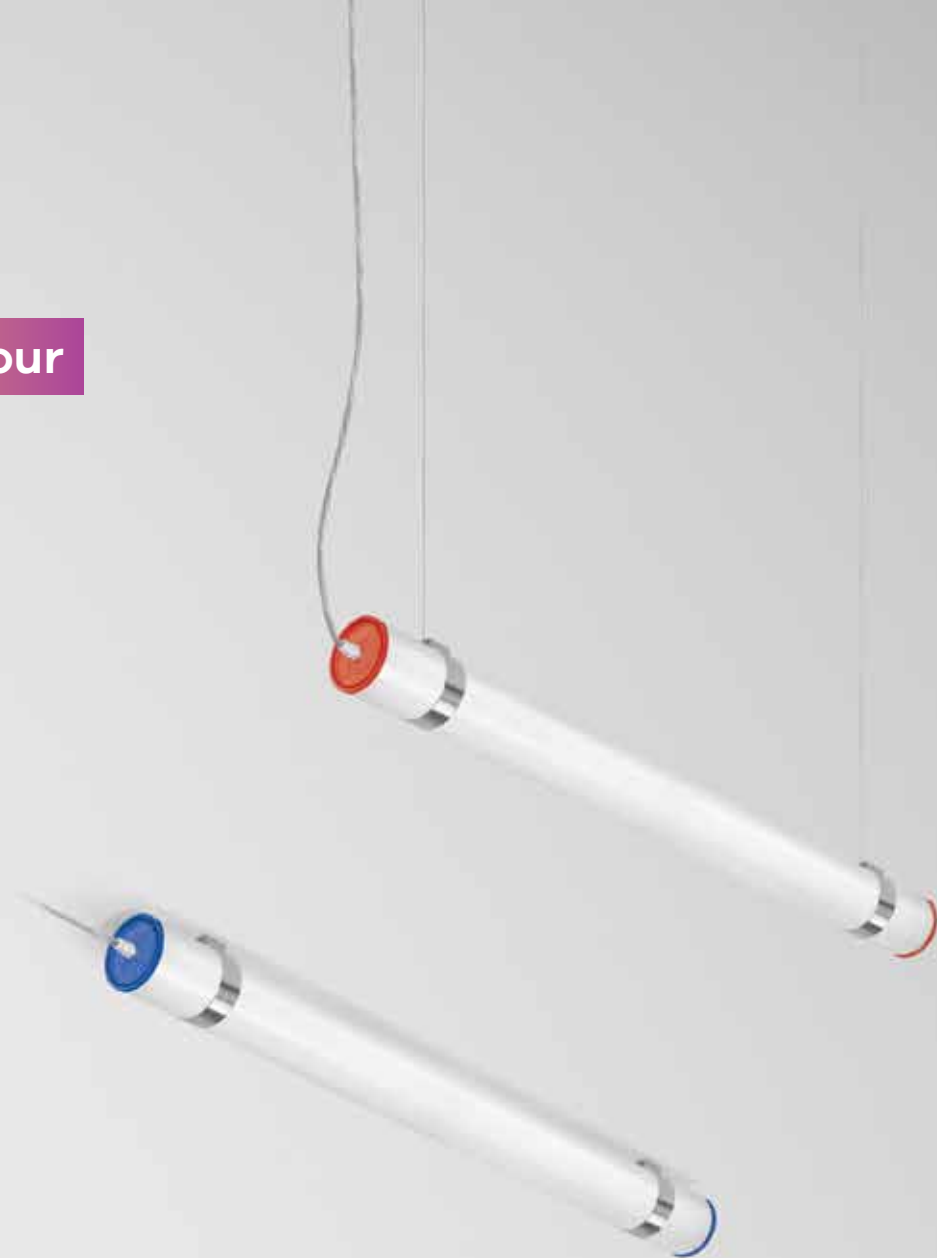

**Finish**  
White matte powder coated gear tray



**Fixing system**  
Clamps not included



**Optical system**  
TOP - Opal diffuser



**Wiring**  
L1500 mm H07RN-F cable and plastic cable gland included


**Light source**  
LED, RG0, CRI>80, MacAdam Step ≤3

**LED lifetime**  
80.000h @ L90, B10, Ta 25°C


**Control gear**  
LED driver 220-240V-50/60Hz included

## 01. Select version

### TTP 70 Colour



#### TOP - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
12	1691	141	620	90551L060▼▲◆0◆00
17	2536	149	900	90551L090▼▲◆0◆00
21	3382	161	1180	90551L120▼▲◆0◆00
26	4227	163	1460	90551L150▼▲◆0◆00

### TTP 70 Colour

- To complete the product add the fixing system. Please order separately.
- For suspended application add the suspension and ceiling rose. Please order separately.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI <sup>1</sup>	H


Colour <sup>2</sup>	
Transparent	0
Black	B
Purple	X
Red	K
Orange	Y
Yellow	T
Green	V
Blue	U

Emergency	
No EM	0
EM 3h (K3) <sup>3</sup>	3

Colour temp.	
3000K	3
4000K	0

## 02. Select options

### OPTIONS Code

Fixing system			
Stainless steel clamp A1 D70 (x2)		36 185 20	915403

Suspension		
S4 L3000 mm (x2)		910204
S4 L6000 mm (x2)		910208

Transparent current supply cable		
L3000 mm - 3 x 0,75 mm <sup>2</sup>		940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>		940501
L6000 mm - 3 x 0,75 mm <sup>2</sup>		940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>		940507

Round ceiling rose			
Surface T24 D95		45   Ø95	978600▲
Recessed T5 D90		Ø70 33   Ø90	971300▲

### IP44

- Under request.

<sup>1</sup> In the DALI versions, the luminaire is equipped with a metal cable gland and transparent 5 x 0,75 mm<sup>2</sup> cable.

<sup>2</sup> End cap colour.

<sup>3</sup> 3h emergency unit with self-test. Only available in HF versions.