


VISA

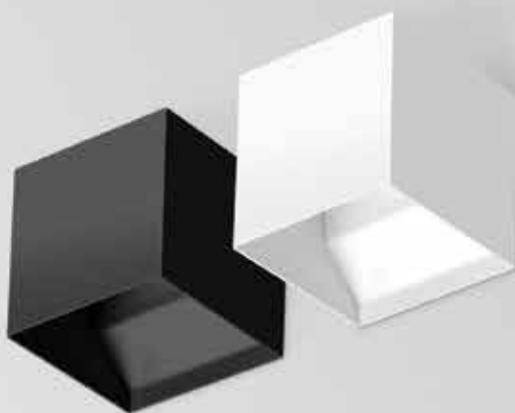

Product characteristics

Body

Steel sheet

Finish

Powder coated

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

50.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 20

650°C


01. Select version



VISA



Direct / Indirect | Beam angle of 90° + 90°




W
3
5

lm output
141
232

CODE*
90220L101E♣0♦90
90220L103E♣0♦90

CO-C180 —
CO-C270 - -

Direct / Indirect | Beam angle of 90° + 5°



W
3
5

lm output
80
143

CODE*
90220L101E♣0♦05
90220L103E♣0♦05

CO-C180 —
CO-C270 - -

***Replace the symbols to complete the code**

Colour	♣
□ White	W
■ Black	B
■ Sahara	0
■ Carbon	I
■ Rusty chain	R
■ Golden eye	D

Colour temp.	♦
3000K	3
4000K	0
5700K	5