



# TALEA

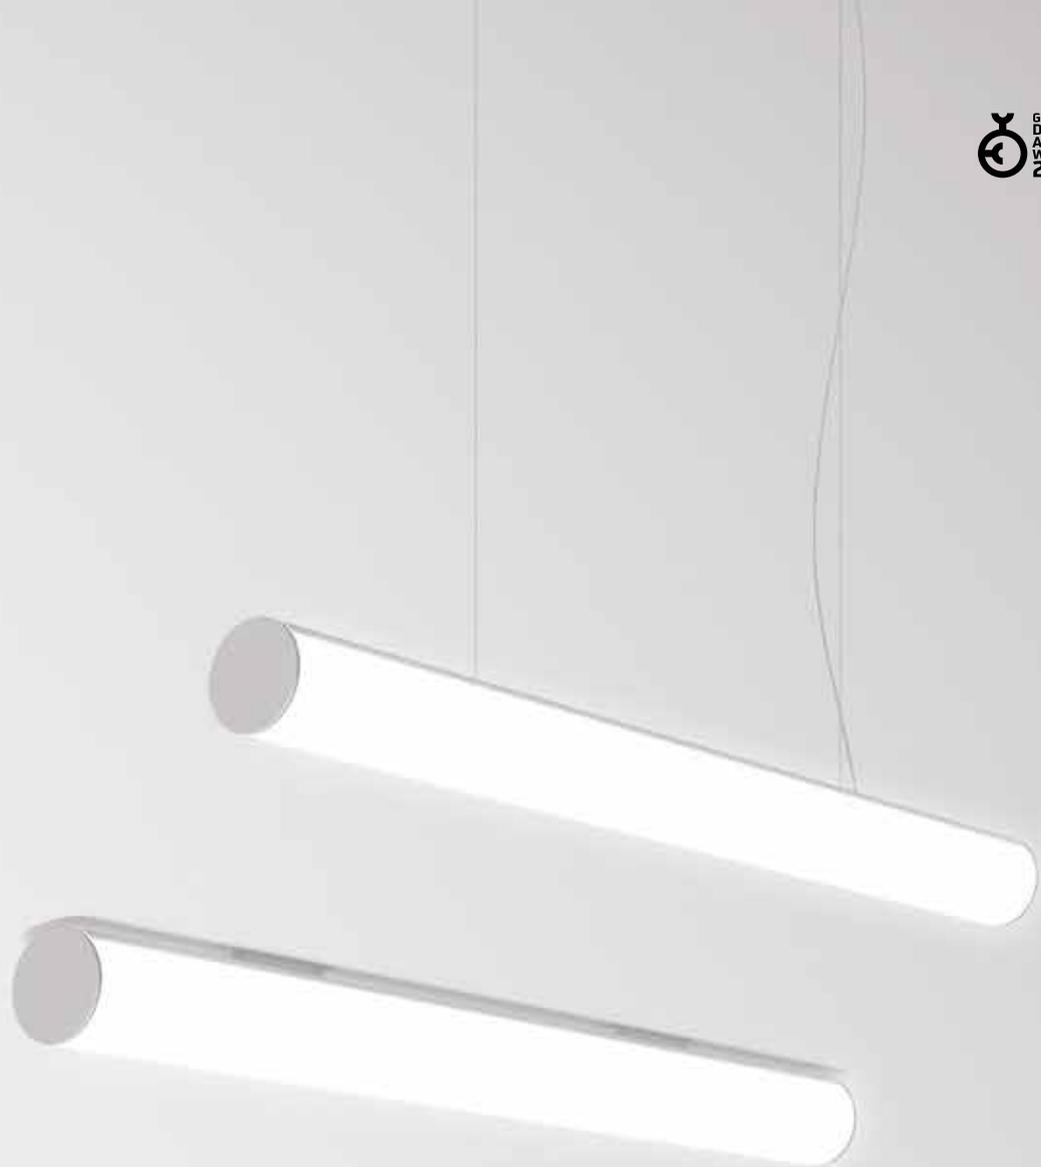

## Product characteristics


- 
- Body**  
Extruded aluminium profile
- End caps**  
Injected polycarbonate
- Finish**  
Anodized in natural colour
- Optical system**  
bLINE - Opal diffuser
- Wiring**  
Pre-wired with 1500 mm transparent current supply cable included
- Light source**  
LED, RG1, CRI>80, MacAdam Step  $\leq 3$
- LED lifetime**  
80.000h @ L90, B10, Ta 25°C
- Control gear**  
LED driver 220-240V-50/60Hz included
- 




# 01. Select version



## TALEA



### bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
19	2340	123	598	90438L220▼▲0♦00
27	3510	130	878	90438L230▼▲0♦00
35	4680	134	1158	90438L240▼▲0♦00
43	5850	136	1438	90438L250▼▲0♦00
54	7020	130	1718	90438L260▼▲0♦00
62	8190	132	1998	90438L270▼▲0♦00
70	9360	134	2278	90438L280▼▲0♦00
78	10530	135	2558	90438L290▼▲0♦00
86	11700	136	2838	90438L200▼▲0♦00

\*Replace the symbols to complete the code

**Module direction ▲**  
 LEFT L  
 RIGHT R


**Control gear ▼**  
 HF E  
 DALI H

**Colour<sup>1</sup> ▲**  
 □ White W  
 ■ Grey G  
 ■ Black B


**Emergency ●**  
 No EM 0  
 EM 3h (K3)<sup>2</sup> 3

**Colour temp. ♦**  
 3000K 3  
 4000K 0

## TALEA HRZ



### bLINE - Opal diffuser



W	lm output	lm/W	CODE*
35	4680	134	90753▲220▼▲0♦00

## TALEA

- For surface application add surface mounting kit. Please order separately.
- For suspended application add the suspension and ceiling rose. Please order separately.

<sup>1</sup> End cap colour.

<sup>2</sup> 3h emergency unit with self-test. Only available in HF versions.

## 02. Select options

OPTIONS	Code*
<b>Surface mounting kit</b>	
TALEA (x2)	926400
TALEA HRZ (x4)	926410
<b>Suspension</b>	
• For TALEA:	
S5 L1500 mm (x2)	910409
S5 L3000 mm (x2)	910412
S5 L6000 mm (x2)	910421
• For TALEA HRZ:	
S5 L1500 mm (x3)	910423
S5 L3000 mm (x3)	910424
S5 L6000 mm (x3)	910425
<b>Current supply cable</b>	
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
<b>Round ceiling rose</b>	
Surface mounted T24 D95 45 l  Ø95	978600▲
Recessed T5 D90  Ø70 33 l  Ø90	971300▲




\*Replace the symbols to complete the code


**Colour** ▲  
 White W  
 Black B




## Product details



Ceiling surface application



Suspended application



Wall application



Talea HRZ



bLINE diffuser




Clip-in diffuser



Light uniformity



Surface mounting kit



Ceiling roses

