


## CONCEPT O 35 /E

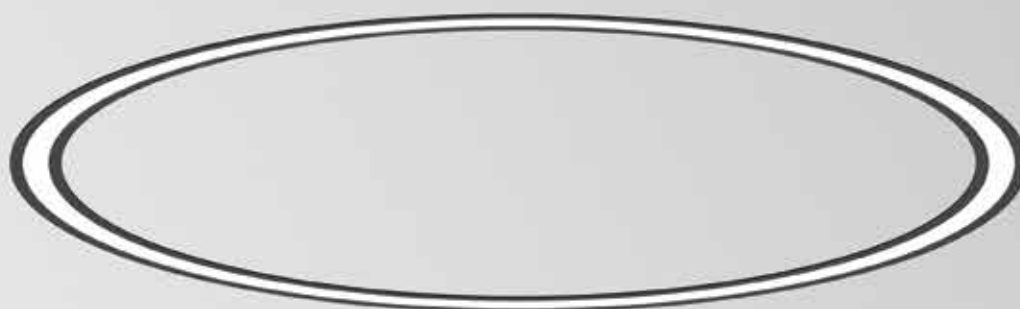

### Product characteristics

---

**Body**

Aluminium

**Finish**

Powder coated

230V/50Hz

**Optical system**

bFLEX - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

**LED lifetime**

70.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included


**Ceiling thickness**

For ceilings between 1-25mm


---

## 01. Select version

### CONCEPT O 35 / E



#### bFLEX - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
36	3296	92	Ø458	90708L012▼▲◆◆00
68	6602	97	Ø780	90708L016▼▲◆◆00
97	9904	102	Ø1139	90708L024▼▲◆◆00
136	13205	97	Ø1497	90708L032▼▲◆◆00
166	16506	99	Ø1856	90708L040▼▲◆◆00
244	23108	95	Ø2572	90708L056▼▲◆◆00
272	26410	97	Ø2929	90708L064▼▲◆◆00
360	36313	101	Ø4003	90708L088▼▲◆◆00
544	52819	97	Ø5792	90708L128▼▲◆◆00
784	72626	93	Ø7939	90708L176▼▲◆◆00

### CONCEPT O 35 / E

- For all diameters above Ø1497 mm the product is composed by multiple modules.
- To obtain the cutting dimensions, see the instruction manual attached to the product or on our website.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour <sup>1</sup>	
White	W
Gray	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Colour temp.	
3000K	3
4000K	0

## 02. Select options



### Select options

OPTIONS Code

#### SwitchDIM

- Under request.

#### Steel safety cable

L1500 mm 955000



bFLEX diffuser

<sup>1</sup> See page 84.