


CONCEPT O 35

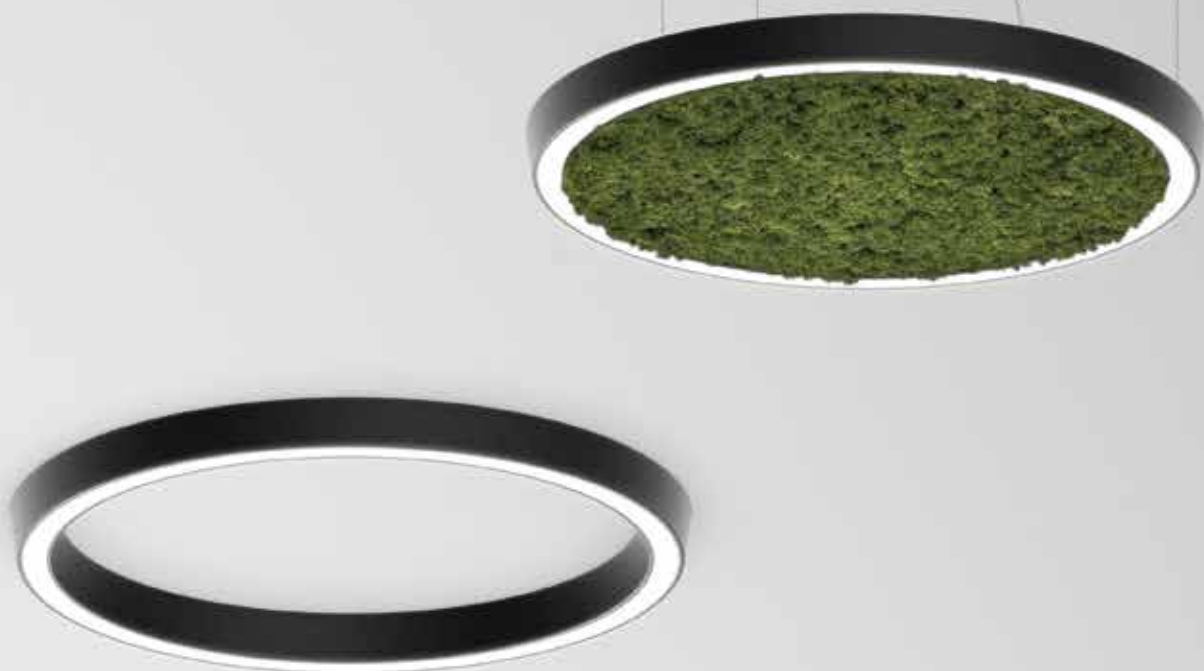

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40




01. Select version



CONCEPT O 35



bFLEX - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
36	3296	92	Ø455	90539L012▼▲◆◆
68	6602	97	Ø777	90539L016▼▲◆◆
97	9904	102	Ø1136	90539L024▼▲◆◆
136	13205	97	Ø1494	90539L032▼▲◆◆
166	16506	99	Ø1853	90539L040▼▲◆◆
244	23108	95	Ø2569	90539L056▼▲◆◆
272	26410	97	Ø2926	90539L064▼▲◆◆
360	36313	101	Ø4000	90539L088▼▲◆◆
544	52819	97	Ø5789	90539L128▼▲◆◆
784	72626	93	Ø7936	90539L176▼▲◆◆

*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Gray	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7





CONCEPT O 35

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- For all diameters above Ø1494 mm the product is composed by multiple modules.
- Create your own configurations on CONFIGURATOR.INDELAGEGROUP.COM.

Colour temp.	
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS	Code*
SwitchDIM	
• Under request.	
Suspension	
S11 (x3) - Ø455, Ø777 mm	912903▲
S11 (x4) - Ø1136 mm	912904▲
S11 (x6) - Ø1494, Ø1853 mm	912906▲
S11 (x8) - Ø2569 mm	912908▲
S11 (x12) - Ø2926, Ø4000 mm	912912▲
S11 (x24) - Ø5789 mm	912924▲
S11 (x32) - Ø7936 mm	912932▲
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
Round ceiling rose	
Surface mounted T24 D95 45 l  Ø95	978600▲
Recessed T5 D90  Ø70 33 l  Ø90	971300▲
Central ceiling rose	
Surface mounted T20 3l - Ø455, Ø777 mm	977201▲
Surface mounted T20 4l - Ø1136 mm	977202▲
Surface mounted T20 6l - Ø1494 mm	977204▲
45 l  Ø95	
Acoustic moss	
Ø455 mm	926800
Ø777 mm	926801
Ø1136 mm	926802
• Sound absorption and humidity control.	
• Other diameters available under request.	
Acoustic panel	
Ø455 mm	926900
Ø777 mm	926901
Ø1136 mm	926902
• Sound absorption.	
• Other diameters available under request.	



*Replace the symbols to complete the code

Length	▲
L1500 mm	1
L3000 mm	2
L6000 mm	3

Colour	▲
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B




Select options



bFLEX diffuser



Ceiling roses



Acoustic panel



Acoustic panel (macro)



Acoustic panel



Acoustic panel (macro)

