


## CONCEPT S 35 /E

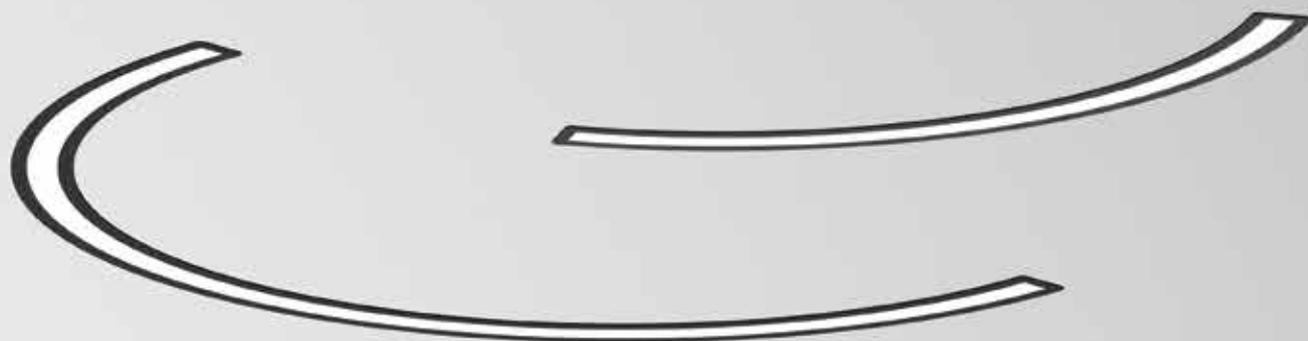


### Product characteristics

---

<b>Body</b> Aluminium
<b>Finish</b> Powder coated
<b>Optical system</b> bFLEX - Opal diffuser not included
<b>Wiring</b> Through-wiring included
<b>Light source</b> LED, RG1, CRI>80, MacAdam Step ≤3
<b>LED lifetime</b> 70.000h @ L90, B10, Ta 25°C
<b>Control gear</b> LED driver 220-240V-50/60Hz included
<b>Ceiling thickness</b> For ceilings between 1-25mm

---




# 01. Select module



## CURVED MODULE




### 1/16 (22,5°) | bFLEX - Opal diffuser (Not included)




W	lm output	lm/W	Lmm	Dmm	CODE*
49	4539	93	1549	Ø7939	90710▲011▼▲0♣♣




### 1/8 (45°) | bFLEX - Opal diffuser (Not included)




W	lm output	lm/W	Lmm	Dmm	CODE*
24	2063	86	710	Ø1856	90711▲005▼▲0♣♣
32	2889	90	984	Ø2572	90711▲007▼▲0♣♣
36	3301	92	1121	Ø2929	90711▲008▼▲0♣♣
49	4539	93	1532	Ø4003	90711▲011▼▲0♣♣
68	6602	97	2217	Ø5792	90711▲016▼▲0♣♣




### 1/4 (90°) | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	Dmm	CODE*
28	2476	88	805	Ø1139	90712▲006▼▲0♣♣
36	3301	92	1059	Ø1497	90712▲008▼▲0♣♣
44	4127	94	1312	Ø1856	90712▲010▼▲0♣♣
61	5777	95	1818	Ø2572	90712▲014▼▲0♣♣
68	6602	97	2071	Ø2929	90712▲016▼▲0♣♣
90	9078	101	2831	Ø4003	90712▲022▼▲0♣♣



### 1/2 (180°) | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	Dmm	CODE*
36	3301	92	780	Ø780	90713▲008▼▲0♣♣
53	4952	93	1139	Ø1139	90713▲012▼▲0♣♣
68	6602	97	1497	Ø1497	90713▲016▼▲0♣♣
83	8253	99	1856	Ø1856	90713▲020▼▲0♣♣

\*Replace the symbols to complete the code

**Module direction** ▲  
LEFT L  
RIGHT R


**Control gear** ▼  
HF E  
DALI H

**Colour 1** ♣  
□ White W  
■ Gray G  
■ Black B  
■ Sahara 0  
■ Mist 1  
■ Carbon I  
■ Autumn L  
■ Rusty chain R  
■ Jungle N  
■ Golden eye D  
■ Old rose 5  
■ Copper 7


**Colour temp.** ♦  
3000K 3  
4000K 0

**Module** ♣  
SRT 49  
MID/END 98

## LINEAR MODULE



### LINEA | bFLEX - Opal diffuser (Not included)



W	lm output	lm/W	Lmm	CODE*
28	2476	88	843	90709L006▼▲0♣♣
36	3301	92	1124	90709L008▼▲0♣♣
44	4127	94	1405	90709L010▼▲0♣♣
53	4952	93	1686	90709L012▼▲0♣♣
61	5777	95	1967	90709L014▼▲0♣♣
68	6602	97	2248	90709L016▼▲0♣♣
76	7428	98	2529	90709L018▼▲0♣♣
83	8253	99	2810	90709L020▼▲0♣♣

### CURVED MODULE | LINEAR MODULE

- To complete the individual product add bFLEX diffuser and start kit. Please order separately.
- To complete the line add bFLEX diffuser, start kit and body connector. Please order separately.
- Dimensions do not include the start kit. Add 6 mm to the recessing length to complete the line.
- To obtain the cutting dimensions, see the instruction manual attached to the product or on our website.

## 02. Select options

OPTIONS	Code*
<b>BFLEX diffuser</b>	
L5000 mm	985705
L15000 mm	985715
L30000 mm	985730
<b>SwitchDIM</b>	
• Under request.	
<b>Start kit - end cap start/end</b> 923010♣	
• Two end caps and screws included.	
<b>Body connector (x1)</b> 932010	
• Screws included.	
<b>Body connector VRT 90° (x1)</b> 932020	
• Screws included.	
<b>Steel safety cable</b>	
L1500 mm	955000
<b>Ceiling marking kit</b>	
• Under request.	



\*Replace the symbols to complete the code


Colour <sup>1</sup>	Symbol
White	W
Gray	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7



## Select options



End cap




Ceiling recessed application



Continuous diffuser



bFLEX diffuser



Diffuser detail

