


CONCEPT Sq 35 D/I

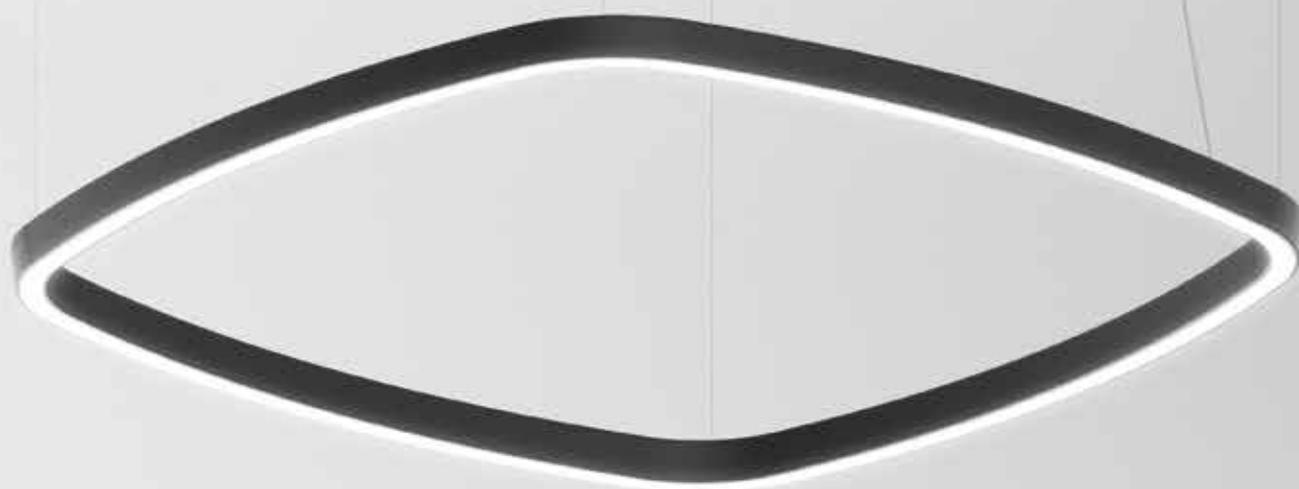

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

70.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40

bFLEX
960°C


01. Select version



CONCEPT Sq 35 D/I



bFLEX - Opal diffuser (80%/20%)



W	lm output	lm/W	Lmm	CODE*
140	13752	98	1126	90705L027▼▲0◆00
170	17053	100	1441	90705L033▼▲0◆00

*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour ¹	
White	W
Gray	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

CONCEPT Sq 35 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.

Colour temp.	
3000K	3
4000K	0

¹ See page 84.

02. Select options

OPTIONS			Code*
SwitchDIM			
• Under request.			
Suspension			
S11 L1500 mm (x4)			9129041
S11 L3000 mm (x4)			9129042
S11 L6000 mm (x4)			9129043
Transparent current supply cable			
L1500 mm - 3 x 0,75 mm ²			940400
L1500 mm - 5 x 0,75 mm ²			940500
L3000 mm - 3 x 0,75 mm ²			940401
L3000 mm - 5 x 0,75 mm ²			940501
L6000 mm - 3 x 0,75 mm ²			940402
L6000 mm - 5 x 0,75 mm ²			940507
Round ceiling rose			
Surface mounted T24 D95	45 l	 Ø95	978600▲
Recessed T5 D90	 Ø70	33 l  Ø90	971300▲
Central ceiling rose			
Surface mounted T20 4l	45 l	 Ø95	977202▲



*Replace the symbols to complete the code

Colour	▲
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B




Select options



Indirect light



bFLEX diffuser



Ceiling roses

