


## DYNA Sq

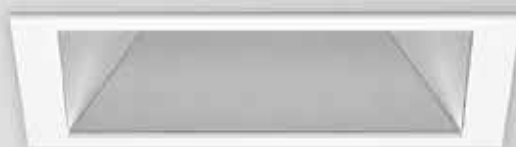

### Product characteristics

---

**Body**

Steel sheet

**Finish**

Powder coated

**Optical system**

PM - Matte reflector

**Light source**

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

**LED lifetime**

60.000h @ L70, B10, Ta 25°C

**Control gear**

Not included

**Ceiling thickness**


For ceilings between 1-25 mm

---


**01.** Select version



**DYNA Sq**



**PM - Matte reflector**



W	lm output	lm/W	mA	ƒ	CODE*
8	1172	145	250	209x209	90757L00L0♣0♦00
17	2283	135	500	209x209	90757L00M0♣0♦00
24	3096	128	700	209x209	90757L00H0♣0♦00

\*Replace the symbols to complete the code

Colour	Symbol
White	♣
Black	♠

Colour temp.	Symbol
3000K	♦
4000K	0

**DYNA Sq**

• To complete the product add the control gear. Please order separately.

**02.** Select options



**Product details**

**OPTIONS** Code

**Control gear HF**

Driver 10,5W 10-42V 250mA HF	900002E
Driver 21W 10-42V 500MA HF	900007E
Driver 28W 28-40V 700MA HF	900303E

**Control gear dimmable DALI**

Driver 13W 09-52V 250mA DALI+ PUSH	900102H
Driver 26W 09-52V 500MA DALI+ PUSH	900107H
Driver 26,3W 09-37,5V 700mA DALI+ PUSH	900111H

**Steel safety cable**

L1500 mm	955000
----------	--------

**Emergency unit (3 hours)**

• Under request.



Front view