


LNE IP

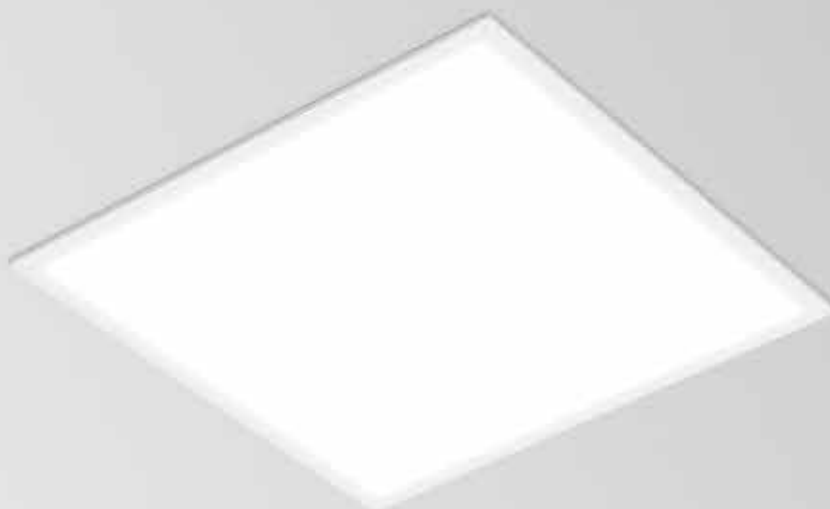

Product characteristics

Body

Steel sheet

Frame

Steel sheet

Finish

White matte powder coated

Fixing system

Pull-up: for plasterboard ceilings with brackets

Optical system

DAM - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

80.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included

Ceiling thickness

For ceilings between 1-25 mm



230V/50Hz




IP 20/54

650°C




01. Select version

LNE IP




DAM - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	⌘	CODE*
≤19	34	4225	124	1197x297	1180x280	90805L123▼W●000
≤19	42	5282	126	1479x297	1480x280	90805L153▼W●000
≤19	34	4225	124	597x597	580x588	90805L066▼W●000

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	⌘	CODE*
≤22	34	4587	135	1197x297	1180x280	90806L123▼W●000
≤22	42	5734	137	1479x297	1480x280	90806L153▼W●000
≤22	34	4587	135	597x597	580x588	90806L066▼W●000



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3

02. Selecionar opções

OPTIONS	Code
Connector	
3-pole Wieland GST18i3 male connector	965301
5-pole Wieland GST18i5 DIM male connector	965403
Steel safety cable	
L1500 mm	955000



Product details



Pull-up recessed version detail

¹ Prepared for emergency remote control.