


REBA 45 LITE /C Line

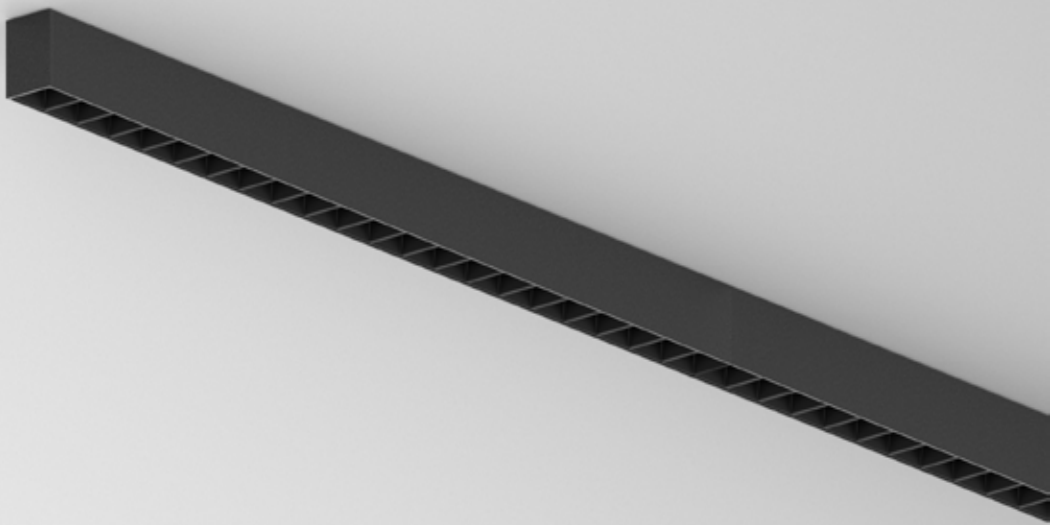

Product characteristics


Body
Extruded aluminium profile
Finish
Epoxy polyester powder coated
Optical system
bOPTICS - Symmetric reflector
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L80, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included

	
230V/50Hz	
	IP 40
650°C	


01. Select version



REBA 45 LITE /C Line



bOPTICS - Symmetric reflector



W	lm output	lm/W	Lmm	CODE*
14	1910	136	560	90980L006♥♣0♦00
27	3819	141	1120	90980L012♥♣0♦00
34	4774	140	1400	90980L015♥♣0♦00
40	5729	143	1680	90980L017♥♣0♦00
68	9548	140	2800	90980L030♥♣0♦00

REBA 45 LITE /C Line

- To complete the line, it is necessary to order the start kit separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- The maximum line length with 1 single feed/power point is 30000 mm.

*Replace the symbols to complete the code

Control gear

HF

DALI

Control gear

HF

DALI

Colour

White

Black

Colour temp.

3000K

4000K

♥

E

H

♣

W

B

♦

3

0

02. Select options



Product details

OPTIONS	Code*
Start kit - end cap start/end	923800♣
• 2 end caps included.	

*Replace the symbols to complete the code

Colour

White

Black

Colour

White

Black

♣

W

B



Start kit