


REBA 45 LITE /C

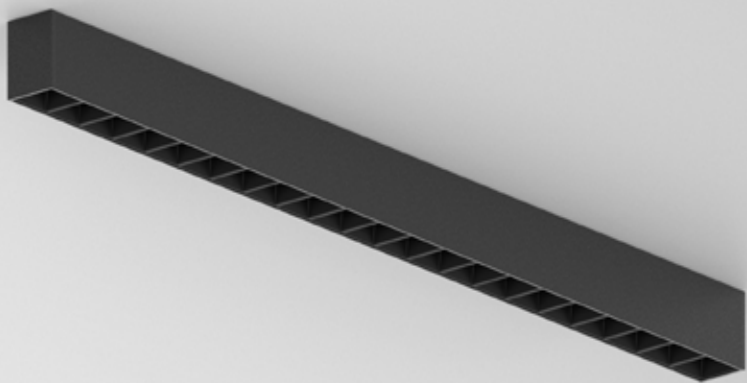

Product
characteristics

Body

Extruded aluminium profile

Finish

Epoxy polyester powder coated

Optical system

bOPTICS - Symmetric reflector

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40

650°C


01. Select version



REBA 45 LITE /C



bOPTICS - Symmetric reflector



W	lm output	lm/W	Lmm	CODE*
14	1910	136	566	90978L006▼♣0♦00
27	3819	141	1126	90978L012▼♣0♦00
34	4774	140	1406	90978L015▼♣0♦00
40	5729	143	1686	90978L017▼♣0♦00
68	9548	140	2806	90978L030▼♣0♦00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour	♣
□ White	W
■ Black	B

Colour temp.	♦
3000K	3
4000K	0