


REBA 50 HEXA

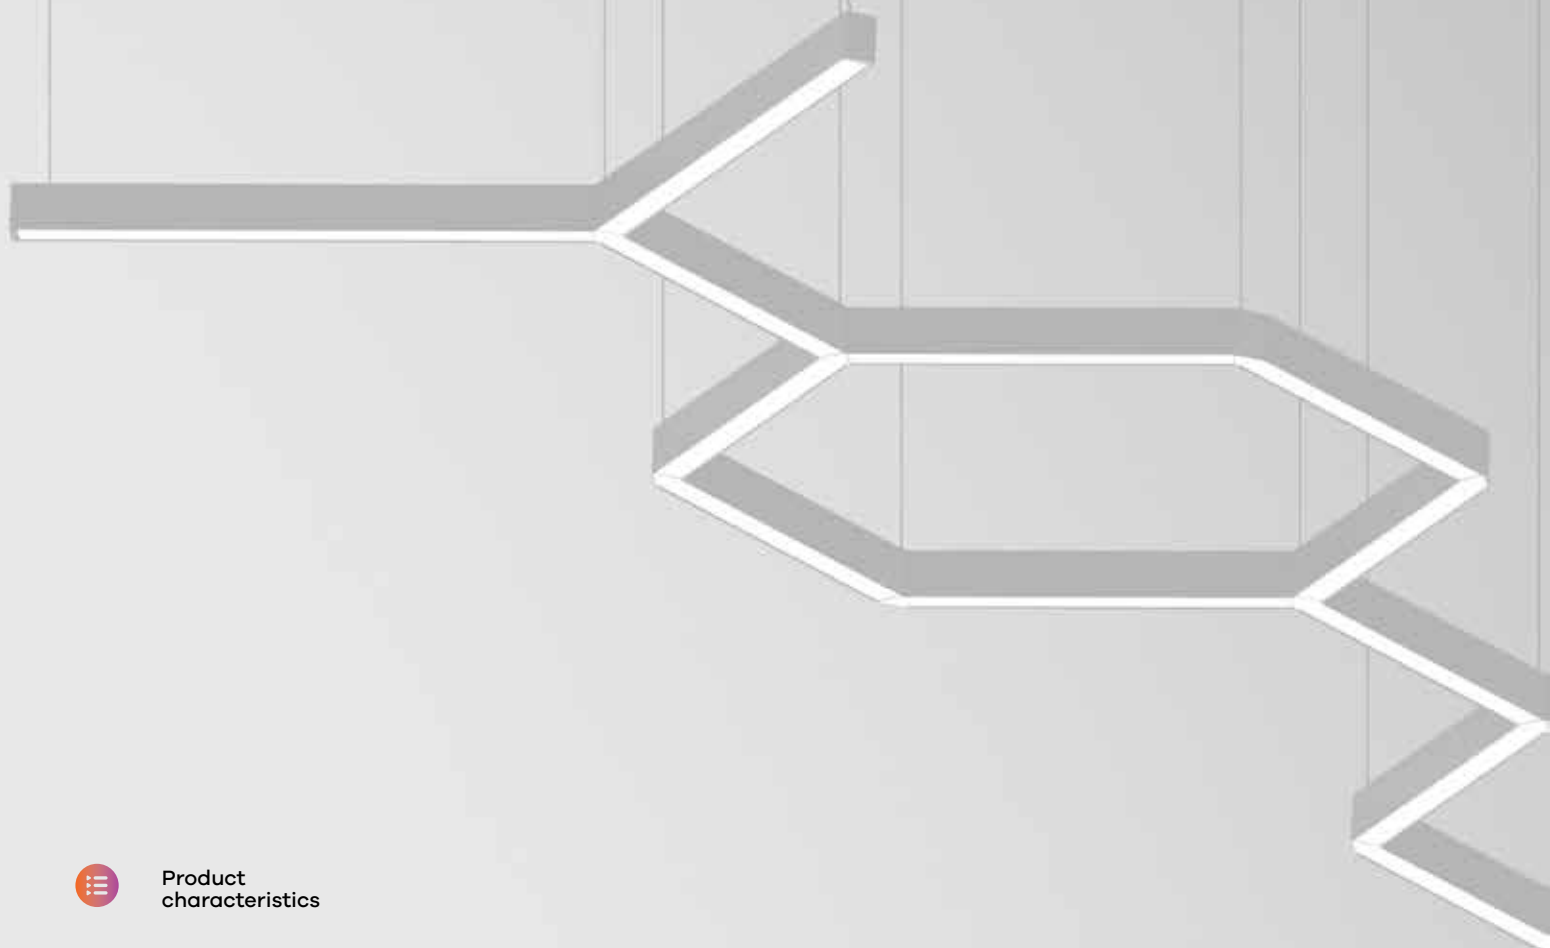

Product characteristics

Body
Extruded aluminium profile

Finish
Powder coated

Optical system
bGLARE - Microprismatic diffuser
bLINE - Opal diffuser

Light source
LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime
80.000h @ L90, B10, Ta 25°C

Control gear
LED driver 220-240V-50/60Hz included



230V/50Hz

IP 40

bGLARE
850°C


bLINE
960°C

01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm	CODE*
567	90505L0020▲0083
847	90505L0030▲0083
1127	90505L0040▲0083

*Replace the symbols to complete the code

Colour	Symbol
White	W
Grey	G
Black	B

Middle (MID)



Lmm	CODE*
562	90860L0020▲0000
842	90860L0030▲0000
1122	90860L0040▲0000


OUTER PROFILE

- To complete the product add the inner profile. Please order separately.
- For suspended version add the suspension, current supply cable and ceiling rose. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- Maximum line length with 1 single feeding point under request.


02. Select Inner and Outer Profile



INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser




W	lm output	lm/W	Lmm	CODE*
15	1603	107	562	90816L002♥W0♦00
22	2405	109	842	90816L003♥W0♦00
30	3207	107	1122	90816L004♥W0♦00

*Replace the symbols to complete the code

Control gear	Symbol
HF	E
DALI	H



bLINE - Opal diffuser








W	lm output	lm/W	Lmm	CODE*
15	1655	110	562	90814L002♥W0♦00
22	2483	113	842	90814L003♥W0♦00
30	3310	110	1122	90814L004♥W0♦00

*Replace the symbols to complete the code

Colour temp.	Symbol
3000K	3
4000K	0

03. Select options

OPTIONS	Code*
Start kit - end cap start/end (x1) 	923101▲
Body connector kit	
2 ways HF	932148▲
2 ways DALI	932149▲
3 ways HF	932150▲
3 ways DALI	932151▲
• White body connector cover. • Through-wiring included.	
Suspension	
S5 L1500 mm (x1)	910408
S5 L1500 mm (x2)	910409
S5 L3000 mm (x1)	910419
S5 L3000 mm (x2)	910412
S5 L6000 mm (x1)	910420
S5 L6000 mm (x2)	910421
Transparent current supply cable	
3 x 1,5 mm ²	94030▲
5 x 1,5 mm ²	94000▲
Square ceiling rose¹	
Surface mounted T25  45 100	978610▲
Recessed T7  Ø70 35 90	971400▲
Round ceiling rose¹	
Surface mounted T24  45 Ø95	978600▲
Recessed T5  Ø70 33 Ø90	971300▲
Low Output version	
• Under request.	
Bespoke projects	
• Under request.	



*Replace the symbols to complete the code

Length	▲
L1500 mm	0
L3000 mm	1
L6000 mm	2

Colour ¹	▲
<input type="checkbox"/> White	W
<input type="checkbox"/> Grey	G
<input type="checkbox"/> Black	B



Product details



