

REBA 50 Line



Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Optical system

bGLARE - Microprismatic diffuser

bLINE - Opal diffuser

ASYM - Asymmetric diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz

IP 40

ASYM
850°C

bGLARE
850°C


bLINE
960°C

01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm	CODE*
567	90505L0020▲0083
847	90505L0030▲0083
1127	90505L0040▲0083
1407	90505L0050▲0083
1687	90505L0060▲0083
1969	90505L0070▲0083
2249	90505L0080▲0083
2529	90505L0090▲0083
2809	90505L0100▲0083

*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

Middle (MID)




Lmm	CODE*
562	90505L0020▲0000
842	90505L0030▲0000
1122	90505L0040▲0000
1402	90505L0050▲0000
1682	90505L0060▲0000
1964	90505L0070▲0000
2244	90505L0080▲0000
2524	90505L0090▲0000
2804	90505L0100▲0000

Vertical corner (VRT)



Lmm	CODE*
606	90505V0040▲0000

Horizontal corner (HRZ) - Horizontal edge corner (EDGE)



Lmm	CODE*
601	90505H0040▲0000


OUTER PROFILE

- To complete the product add the inner profile. Please order separately.
- For suspended version add the suspension, current supply cable and ceiling rose. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- The maximum line length with 1 single feeding point is 30000 mm.


02. Select Inner and Outer Profile



INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser




W	lm output	lm/W	Lmm	CODE*	
15	1603	107	562	90498L002▼VV0◆00	
22	2405	109	842	90498L003▼VV0◆00	
30	3207	107	1122	90498L004▼VV◆◆00	
35	4008	115	1402	90498L005▼VV◆◆00	
42	4810	115	1682	90498L006▼VV◆◆00	
52	5612	108	1964	90498L007▼VV◆◆00	
60	6413	107	2244	90498L008▼VV◆◆00	
65	7215	111	2524	90498L009▼VV◆◆00	
70	8017	115	2804	90498L010▼VV◆◆00	
VRT	30	3207	107	599	90498V004▼VV0◆00
HRZ	30	3207	107	577	90498H004▼VV0◆00


bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*	
15	1655	110	562	90497L002▼VV0◆00	
22	2483	113	842	90497L003▼VV0◆00	
30	3310	110	1122	90497L004▼VV◆◆00	
35	4138	118	1402	90497L005▼VV◆◆00	
42	4965	118	1682	90497L006▼VV◆◆00	
52	5793	111	1964	90497L007▼VV◆◆00	
60	6620	110	2244	90497L008▼VV◆◆00	
65	7448	115	2524	90497L009▼VV◆◆00	
70	8275	118	2804	90497L010▼VV◆◆00	
VRT	30	3310	110	599	90497V004▼VV0◆00
HRZ	30	3310	110	577	90497H004▼VV0◆00



INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	lm output	lm/W	Lmm	CODE*	
16	1396	87	562	90500L002▼VV0◆00	
23	2095	91	842	90500L003▼VV0◆00	
29	2793	96	1122	90500L004▼VV◆◆00	
36	3491	97	1402	90500L005▼VV◆◆00	
44	4189	95	1682	90500L006▼VV◆◆00	
52	4888	94	1964	90500L007▼VV◆◆00	
58	5586	96	2244	90500L008▼VV◆◆00	
65	6284	97	2524	90500L009▼VV◆◆00	
73	6982	96	2804	90500L010▼VV◆◆00	
EDGE	29	2793	96	599	90500E004▼VV0◆00
HRZ	29	2793	96	577	90500H004▼VV0◆00

*Replace the symbols to complete the code

Control gear

HF	E
DALI	H

Emergency

No EM	0
EM 3h (K3) ^{1 2}	3

Colour temp.

3000K	3
4000K	0
Tunable White ³	T

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White	926600
<ul style="list-style-type: none"> Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm. 	
Start kit - end cap start/end	923100▲
<ul style="list-style-type: none"> 2 end caps included. 	
Through-wiring	
<ul style="list-style-type: none"> Standard 3 x 1,5 mm² 945650 5 x 1,5 mm² 945750 	
<ul style="list-style-type: none"> 2 x 1,5 mm² HF+K3 (x1) - L562 - L1682 mm 948000 HF+K3 (x2) - L1964 - L2804 mm 948001 	
<ul style="list-style-type: none"> 2 x 1,5 mm² + 5P terminal block DALI+K3 (x1) - L562 - L1682 mm 948200 DALI+K3 (x2) - L1964 - L2804 mm 948201 	
<ul style="list-style-type: none"> 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block K3+TEL (x1) - L562 - L1682 mm 948100 K3+TEL (x2) - L1964 - L2804 mm 948101 	
Body connector kit	932100
<ul style="list-style-type: none"> Steel body connector, screws included. 	
Suspension	
S5 L1500 mm (x1) 910408	
S5 L1500 mm (x2) 910409	
S5 L3000 mm (x1) 910419	
S5 L3000 mm (x2) 910412	
S5 L6000 mm (x1) 910420	
S5 L6000 mm (x2) 910421	
Transparent current supply cable	
3 x 1,5 mm ² 94030▲	
5 x 1,5 mm ² 94000▲	
7 x 1,5 mm ² 94010▲	
<ul style="list-style-type: none"> For the option DALI with emergency unit and remote control, it is necessary to order 2 current supply cables of 5 x 1,5 mm². 	
Square ceiling rose³	
Surface mounted T25 45  100 978610▲	
Surface mounted T29 (DALI+K3) 978611▲	
Recessed T7  90 971400▲	
Recessed T59 (DALI+K3) 971410▲	
Round ceiling rose³	
Surface mounted T24 45  Ø95 978600▲	
Surface mounted T26 (DALI+K3) 978601▲	
Recessed T5  Ø90 971300▲	
Recessed T27 (DALI+K3) 978700▲	
Blank part	
L1500 mm 992900▲	
L3000 mm 992901▲	
<ul style="list-style-type: none"> Includes inner profile and aluminium blank cover. 	
Low Output version	
<ul style="list-style-type: none"> Under request. 	
Bespoke projects	
<ul style="list-style-type: none"> Under request. 	




*Replace the symbols to complete the code

Length	▲
L1500 mm	0
L3000 mm	1
L6000 mm	2

Colour ³	▲
□ White	W
■ Grey	G
■ Black	B



Product details

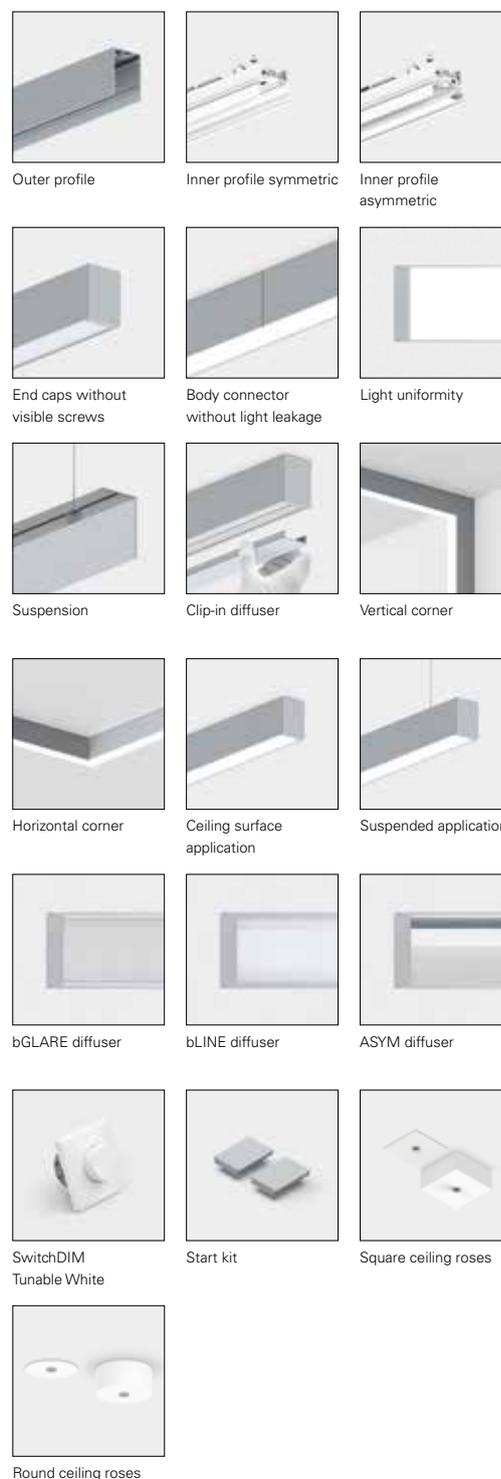

³The ceiling roses are available only in White or Black colour.