


REBA 50 /T

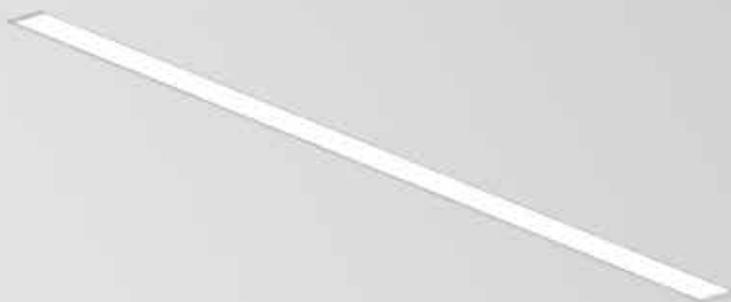

Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Fixing system

Trimless recessed mounting kit

Optical system

bGLARE - Microprismatic diffuser

bLINE - Opal diffuser

ASYM - Asymmetric diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤ 3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included


Ceiling thickness

For ceilings between 10, 13, 15 and 18 mm



01. Select Outer Profile

OUTER PROFILE



Lmm		CODE*
598	600	90519L0020▲0000
878	880	90519L0030▲0000
1158	1160	90519L0040▲0000
1438	1440	90519L0050▲0000
1718	1720	90519L0060▲0000
2000	2002	90519L0070▲0000
2280	2282	90519L0080▲0000
2560	2562	90519L0090▲0000
2840	2842	90519L0100▲0000



*Replace the symbols to complete the code


Colour	▲
<input type="checkbox"/> White	W
<input type="checkbox"/> Grey	G
<input type="checkbox"/> Black	B

OUTER PROFILE


• To complete the product add the inner profile. Please order separately.

02. Select Inner and Outer Profile


INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser



W	lm output	lm/W	Lmm	CODE*
15	1603	107	562	90498L002▼W0◆00
22	2405	109	842	90498L003▼W0◆00
30	3207	107	1122	90498L004▼W◆000
35	4008	115	1402	90498L005▼W◆000
42	4810	115	1682	90498L006▼W◆000
52	5612	108	1964	90498L007▼W◆000
60	6413	107	2244	90498L008▼W◆000
65	7215	111	2524	90498L009▼W◆000
70	8017	115	2804	90498L010▼W◆000



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
15	1655	110	562	90497L002▼W0◆00
22	2483	113	842	90497L003▼W0◆00
30	3310	110	1122	90497L004▼W◆000
35	4138	118	1402	90497L005▼W◆000
42	4965	118	1682	90497L006▼W◆000
52	5793	111	1964	90497L007▼W◆000
60	6620	110	2244	90497L008▼W◆000
65	7448	115	2524	90497L009▼W◆000
70	8275	118	2804	90497L010▼W◆000


*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H


Emergency	●
No EM	0
EM 3h (K3) ^{1 2}	3

Colour temp.	◆
3000K	3
4000K	0
Tunable White ³	T

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	lm output	lm/W	Lmm	Code*
16	1396	87	562	90500L002▼W0◆00
23	2095	91	842	90500L003▼W0◆00
29	2793	96	1122	90500L004▼W◆000
36	3491	97	1402	90500L005▼W◆000
44	4189	95	1682	90500L006▼W◆000
52	4888	94	1964	90500L007▼W◆000
58	5586	96	2244	90500L008▼W◆000
65	6284	97	2524	90500L009▼W◆000
73	6982	96	2804	90500L010▼W◆000

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code
SwitchDIM Tunable White • Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.	926600
Steel safety cable L1500 mm	955000
Low Output version • Under request.	

Product details



Outer profile



Inner profile symmetric



Inner profile asymmetric




Light uniformity



Trimless recessed mounting kit




Clip-in diffuser



Trimless application



bGLARE diffuser



bLINE diffuser



ASYM diffuser



SwitchDIM Tunable White

