


## REBA 50 /W

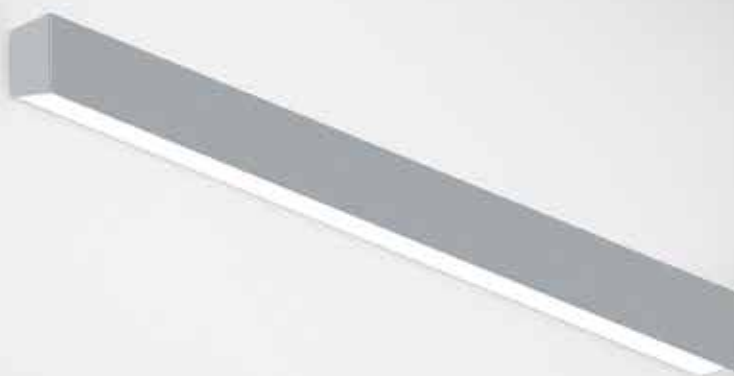

### Product characteristics

#### Body

Extruded aluminium profile

#### Finish

Powder coated

#### Optical system

bLINE - Opal diffuser

#### Light source

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

#### LED lifetime

80.000h @ L90, B10, Ta 25°C

#### Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 40



## 01. Select Outer Profile

### OUTER PROFILE



Lmm	CODE*
1128	90521L0040▲0000
1408	90521L0050▲0000
1688	90521L0060▲0000
1968	90521L0070▲0000
2248	90521L0080▲0000
2528	90521L0090▲0000
2808	90521L0100▲0000



\*Replace the symbols to complete the code


Colour	Symbol
White	W
Grey	G
Black	B

### OUTER PROFILE


• To complete the product add the inner profile. Please order separately.

## 02. Select Inner and Outer Profile

### INNER PROFILE | DIRECT / INDIRECT



#### bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
60	6724	112	1122	90536L004▼W0◆00
70	8405	120	1402	90536L005▼W0◆00
84	10085	120	1682	90536L006▼W0◆00
104	11766	113	1962	90536L007▼W0◆00
120	13447	112	2242	90536L008▼W0◆00
130	15128	116	2522	90536L009▼W0◆00
140	16809	120	2802	90536L010▼W0◆00

\*Replace the symbols to complete the code


Control gear	Symbol
HF	E
DALI	H
HF+CD <sup>1</sup>	Y
SWD+CD <sup>2</sup>	Q

Emergency	Symbol
No EM	0
EM 3h (K3) <sup>3</sup>	3

### INNER PROFILE | DIRECT




#### bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90535L004▼W0◆00
35	4202	120	1402	90535L005▼W0◆00
42	5043	120	1682	90535L006▼W0◆00
52	5883	113	1962	90535L007▼W0◆00
60	6724	112	2242	90535L008▼W0◆00
65	7564	116	2522	90535L009▼W0◆00
70	8405	120	2802	90535L010▼W0◆00

Colour temp.	Symbol
3000K	3
4000K	0
Tunable White <sup>4</sup>	T

### INNER PROFILE | INDIRECT



#### bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90518L004▼W0◆00
35	4202	120	1402	90518L005▼W0◆00
42	5043	120	1682	90518L006▼W0◆00
52	5883	113	1962	90518L007▼W0◆00
60	6724	112	2242	90518L008▼W0◆00
65	7564	116	2522	90518L009▼W0◆00
70	8405	120	2802	90518L010▼W0◆00

<sup>1</sup> HF + Double circuit.

<sup>2</sup> SwitchDIM + Double circuit.


<sup>3</sup> Prepared for emergency remote control.

<sup>4</sup> Only available for the DALI and SWD+CD without emergency unit versions (No EM).

### 03. Select options


OPTIONS	Code
<p><b>SwitchDIM Tunable White</b></p> <ul style="list-style-type: none"> <li>In the Direct version and in the Indirect version each SwitchDIM Tunable White allows the control up to 20 luminaires of <math>L \leq 1682</math> mm and up to 10 luminaires of <math>L \geq 1964</math> mm.</li> <li>In the Direct/Indirect version each SwitchDIM Tunable White allows the control up to 10 luminaires of <math>L \leq 1682</math> mm and up to 5 luminaires of <math>L \geq 1964</math> mm.</li> </ul>	926600
<p><b>Signage</b></p> <ul style="list-style-type: none"> <li>Allows signs or text engraving on the outer profile.</li> </ul>	
<p><b>Low Output version</b></p> <ul style="list-style-type: none"> <li>Under request.</li> </ul>	

### Product details



Outer profile

Inner profile



End caps without visible screws

Light uniformity



Clip-in diffuser

Wall application with direct/indirect light



Wall application with direct light

Wall application with indirect light



bLINE diffuser

SwitchDIM Tunable White



Bespoke signage under request

