

REBA 65 Line



Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Optical system

bGLARE - Microprismatic diffuser

bLINE - Opal diffuser

ASYM - Asymmetric diffuser

Light source


LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included




01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm	CODE*
567	90509L0020▲0083
847	90509L0030▲0083
1127	90509L0040▲0083
1407	90509L0050▲0083
1687	90509L0060▲0083
1969	90509L0070▲0083
2249	90509L0080▲0083
2529	90509L0090▲0083
2809	90509L0100▲0083

*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

Middle (MID)




Lmm	CODE*
562	90509L0020▲0000
842	90509L0030▲0000
1122	90509L0040▲0000
1402	90509L0050▲0000
1682	90509L0060▲0000
1964	90509L0070▲0000
2244	90509L0080▲0000
2524	90509L0090▲0000
2804	90509L0100▲0000

Vertical corner (VRT)



Lmm	CODE*
606	90509V0040▲0000

Horizontal corner (HRZ) - Horizontal edge corner (EDGE)



Lmm	CODE*
608	90509H0040▲0000


OUTER PROFILE

- To complete the product add the inner profile. Please order separately.
- For suspended version add the suspension, current supply cable and ceiling rose. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- The maximum line length with 1 single feeding point is 30000 mm.


02. Select Inner and Outer Profile



INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser




W	lm output	lm/W	Lmm	CODE*	
15	1577	105	562	90502L002♥VV♦♦00	
22	2366	108	842	90502L003♥VV♦♦00	
30	3155	105	1122	90502L004♥VV♦♦00	
35	3944	113	1402	90502L005♥VV♦♦00	
42	4732	113	1682	90502L006♥VV♦♦00	
52	5521	106	1964	90502L007♥VV♦♦00	
60	6310	105	2244	90502L008♥VV♦♦00	
65	7099	109	2524	90502L009♥VV♦♦00	
70	7887	113	2804	90502L010♥VV♦♦00	
<hr/>					
VRT	30	3155	105	606	90502V004♥VV♦♦00
HRZ	30	3155	105	608	90502H004♥VV♦♦00

bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*	
15	1681	112	562	90501L002♥VV♦♦00	
22	2521	115	842	90501L003♥VV♦♦00	
30	3362	112	1122	90501L004♥VV♦♦00	
35	4202	120	1402	90501L005♥VV♦♦00	
42	5043	120	1682	90501L006♥VV♦♦00	
52	5883	113	1964	90501L007♥VV♦♦00	
60	6724	112	2244	90501L008♥VV♦♦00	
65	7564	116	2524	90501L009♥VV♦♦00	
70	8405	120	2804	90501L010♥VV♦♦00	
<hr/>					
VRT	30	3362	112	606	90501V004♥VV♦♦00
HRZ	30	3362	112	608	90501H004♥VV♦♦00

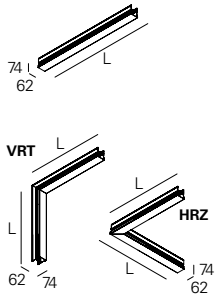

*Replace the symbols to complete the code

Control gear

HF E

DALI H

Emergency

No EM 0

EM 3h (K3) ^{1,2} 3


Colour temp.

3000K 3


4000K 0

Tunable White ³ T

INNER PROFILE | ASYMMETRIC

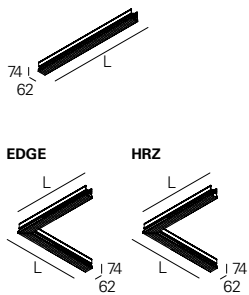

ASYM - Diffuser







W	lm output	lm/W	Lmm	CODE*	
16	1474	92	562	90504L002♥VV♦♦00	
23	2211	96	842	90504L003♥VV♦♦00	
29	2948	102	1122	90504L004♥VV♦♦00	
36	3685	102	1402	90504L005♥VV♦♦00	
44	4422	101	1682	90504L006♥VV♦♦00	
52	5159	99	1964	90504L007♥VV♦♦00	
58	5896	102	2244	90504L008♥VV♦♦00	
65	6633	102	2524	90504L009♥VV♦♦00	
73	7370	101	2804	90504L010♥VV♦♦00	
<hr/>					
EDGE	29	2948	102	606	90504E004♥VV♦♦00
HRZ	29	2948	102	608	90504H004♥VV♦♦00

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White	926600
• Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.	
Start kit - end cap start/end	923500▲
• 2 end caps included.	
Through-wiring	
• Standard	
3 x 1,5 mm ²	945650
5 x 1,5 mm ²	945750
• 2 x 1,5 mm²	
HF+K3 (x1) - L562 - L1682 mm	948000
HF+K3 (x2) - L1964 - L2804 mm	948001
• 2 x 1,5 mm² + 5P terminal block	
DALI+K3 (x1) - L562 - L1682 mm	948200
DALI+K3 (x2) - L1964 - L2804 mm	948201
• 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block	
K3+TEL (x1) - L562 - L1682 mm	948100
K3+TEL (x2) - L1964 - L2804 mm	948101
Body connector kit	932200
• Steel body connector, screws included.	
Suspension	
S5 L1500 mm (x1)	910408
S5 L1500 mm (x2)	910409
S5 L3000 mm (x1)	910419
S5 L3000 mm (x2)	910412
S5 L6000 mm (x1)	910420
S5 L6000 mm (x2)	910421
Transparent current supply cable	
3 x 1,5 mm ²	94030▲
5 x 1,5 mm ²	94000▲
7 x 1,5 mm ²	94010▲
• For the option DALI with emergency unit and remote control, it is necessary to order 2 current supply cables of 5 x 0,75 mm ² .	
Square ceiling rose ³	
Surface mounted T25	45  100 978610▲
Surface mounted T29 (DALI+K3)	978611▲
Recessed T7	Ø70 35  90 971400▲
Recessed T59 (DALI+K3)	971410▲
Round ceiling rose ³	
Surface mounted T24	45  Ø95 978600▲
Surface mounted T26 (DALI+K3)	978601▲
Recessed T5	Ø70 33  Ø90 971300▲
Recessed T27 (DALI+K3)	978700▲
Blank part	
L1500 mm	993000▲
L3000 mm	993001▲
• Includes inner profile and aluminium blank cover.	
Low Output version	
• Under request.	
Bespoke projects	
• Under request.	



*Replace the symbols to complete the code

Length	▲
L1500 mm	0
L3000 mm	1
L6000 mm	2

Colour ³	▲
□ White	W
■ Grey	G
■ Black	B




Product details



Outer profile

Inner profile symmetric

Inner profile asymmetric

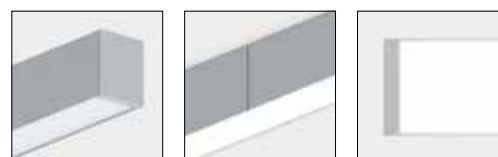

End caps without visible screws

Body connector without light leakage


Light uniformity



Suspension

Clip-in diffuser

Vertical corner

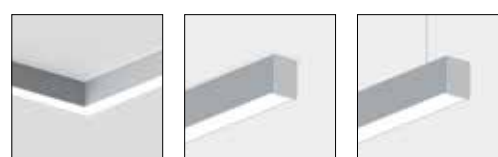

Horizontal corner

Ceiling surface application

Suspended application



bGLARE diffuser

bLINE diffuser


ASYM diffuser



SwitchDIM Tunable White

Start kit

Square ceiling roses



Round ceiling roses

³The ceiling roses are available only in White or Black colour.