

REBA 65



Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Optical system

bGLARE - Microprismatic diffuser

bLINE - Opal diffuser

ASYM - Asymmetric diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C


Control gear

LED driver 220-240V-50/60Hz included



01. Select Outer Profile

OUTER PROFILE



Lmm	CODE*
578	90522L0020♣0000
858	90522L0030♣0000
1138	90522L0040♣0000
1418	90522L0050♣0000
1698	90522L0060♣0000
1980	90522L0070♣0000
2260	90522L0080♣0000
2540	90522L0090♣0000
2820	90522L0100♣0000



*Replace the symbols to complete the code


Colour	Symbol
White	W
Grey	G
Black	B

OUTER PROFILE


- To complete the product add the inner profile. Please order separately.
- For suspended version add the suspension, current supply cable and ceiling rose. Please order separately.

02. Select Inner and Outer Profile

INNER PROFILE | SYMMETRIC



bGLARE - Microprismatic diffuser




W	lm output	lm/W	Lmm	CODE*
15	1577	105	562	90502L002♥W0♦00
22	2366	108	842	90502L003♥W0♦00
30	3155	105	1122	90502L004♥W♦000
35	3944	113	1402	90502L005♥W♦000
42	4732	113	1682	90502L006♥W♦000
52	5521	106	1964	90502L007♥W♦000
60	6310	105	2244	90502L008♥W♦000
65	7099	109	2524	90502L009♥W♦000
70	7887	113	2804	90502L010♥W♦000


*Replace the symbols to complete the code

Control gear	Symbol
HF	E
DALI	H

Emergency	Symbol
No EM	0
EM 3h (K3) ^{1 2}	3




bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
15	1681	112	562	90501L002♥W0♦00
22	2521	115	842	90501L003♥W0♦00
30	3362	112	1122	90501L004♥W♦000
35	4202	120	1402	90501L005♥W♦000
42	5043	120	1682	90501L006♥W♦000
52	5883	113	1964	90501L007♥W♦000
60	6724	112	2244	90501L008♥W♦000
65	7564	116	2524	90501L009♥W♦000
70	8405	120	2804	90501L010♥W♦000

Colour temp.	Symbol
3000K	3
4000K	0
Tunable White ³	T

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	lm output	lm/W	Lmm	CODE*
16	1474	92	562	90504L002♥W0♦00
23	2211	96	842	90504L003♥W0♦00
29	2948	102	1122	90504L004♥W♦000
36	3685	102	1402	90504L005♥W♦000
44	4422	101	1682	90504L006♥W♦000
52	5159	99	1964	90504L007♥W♦000
58	5896	102	2244	90504L008♥W♦000
65	6633	102	2524	90504L009♥W♦000
73	7370	101	2804	90504L010♥W♦000

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White	926600
<ul style="list-style-type: none"> Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm. 	
Suspension	
S5 L1500 mm (x1)	910408
S5 L1500 mm (x2)	910409
S5 L3000 mm (x1)	910419
S5 L3000 mm (x2)	910412
S5 L6000 mm (x1)	910420
S5 L6000 mm (x2)	910421
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
<ul style="list-style-type: none"> For the option DALI with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm². 	
Square ceiling rose	
Surface mounted T25  45 100	978610
Surface mounted T29 (DALI+K3) 	978611
Recessed T7  Ø70 35 90	971400
Recessed T59 (DALI+K3) 	971410
Round ceiling rose	
Surface mounted T24  45 Ø95	978600
Surface mounted T26 (DALI+K3) 	978601
Recessed T5  Ø70 33 Ø90	971300
Recessed T27 (DALI+K3) 	978700
Low Output version	
<ul style="list-style-type: none"> Under request. 	




*Replace the symbols to complete the code

Colour	▲
□ White	W
■ Black	B



Product details



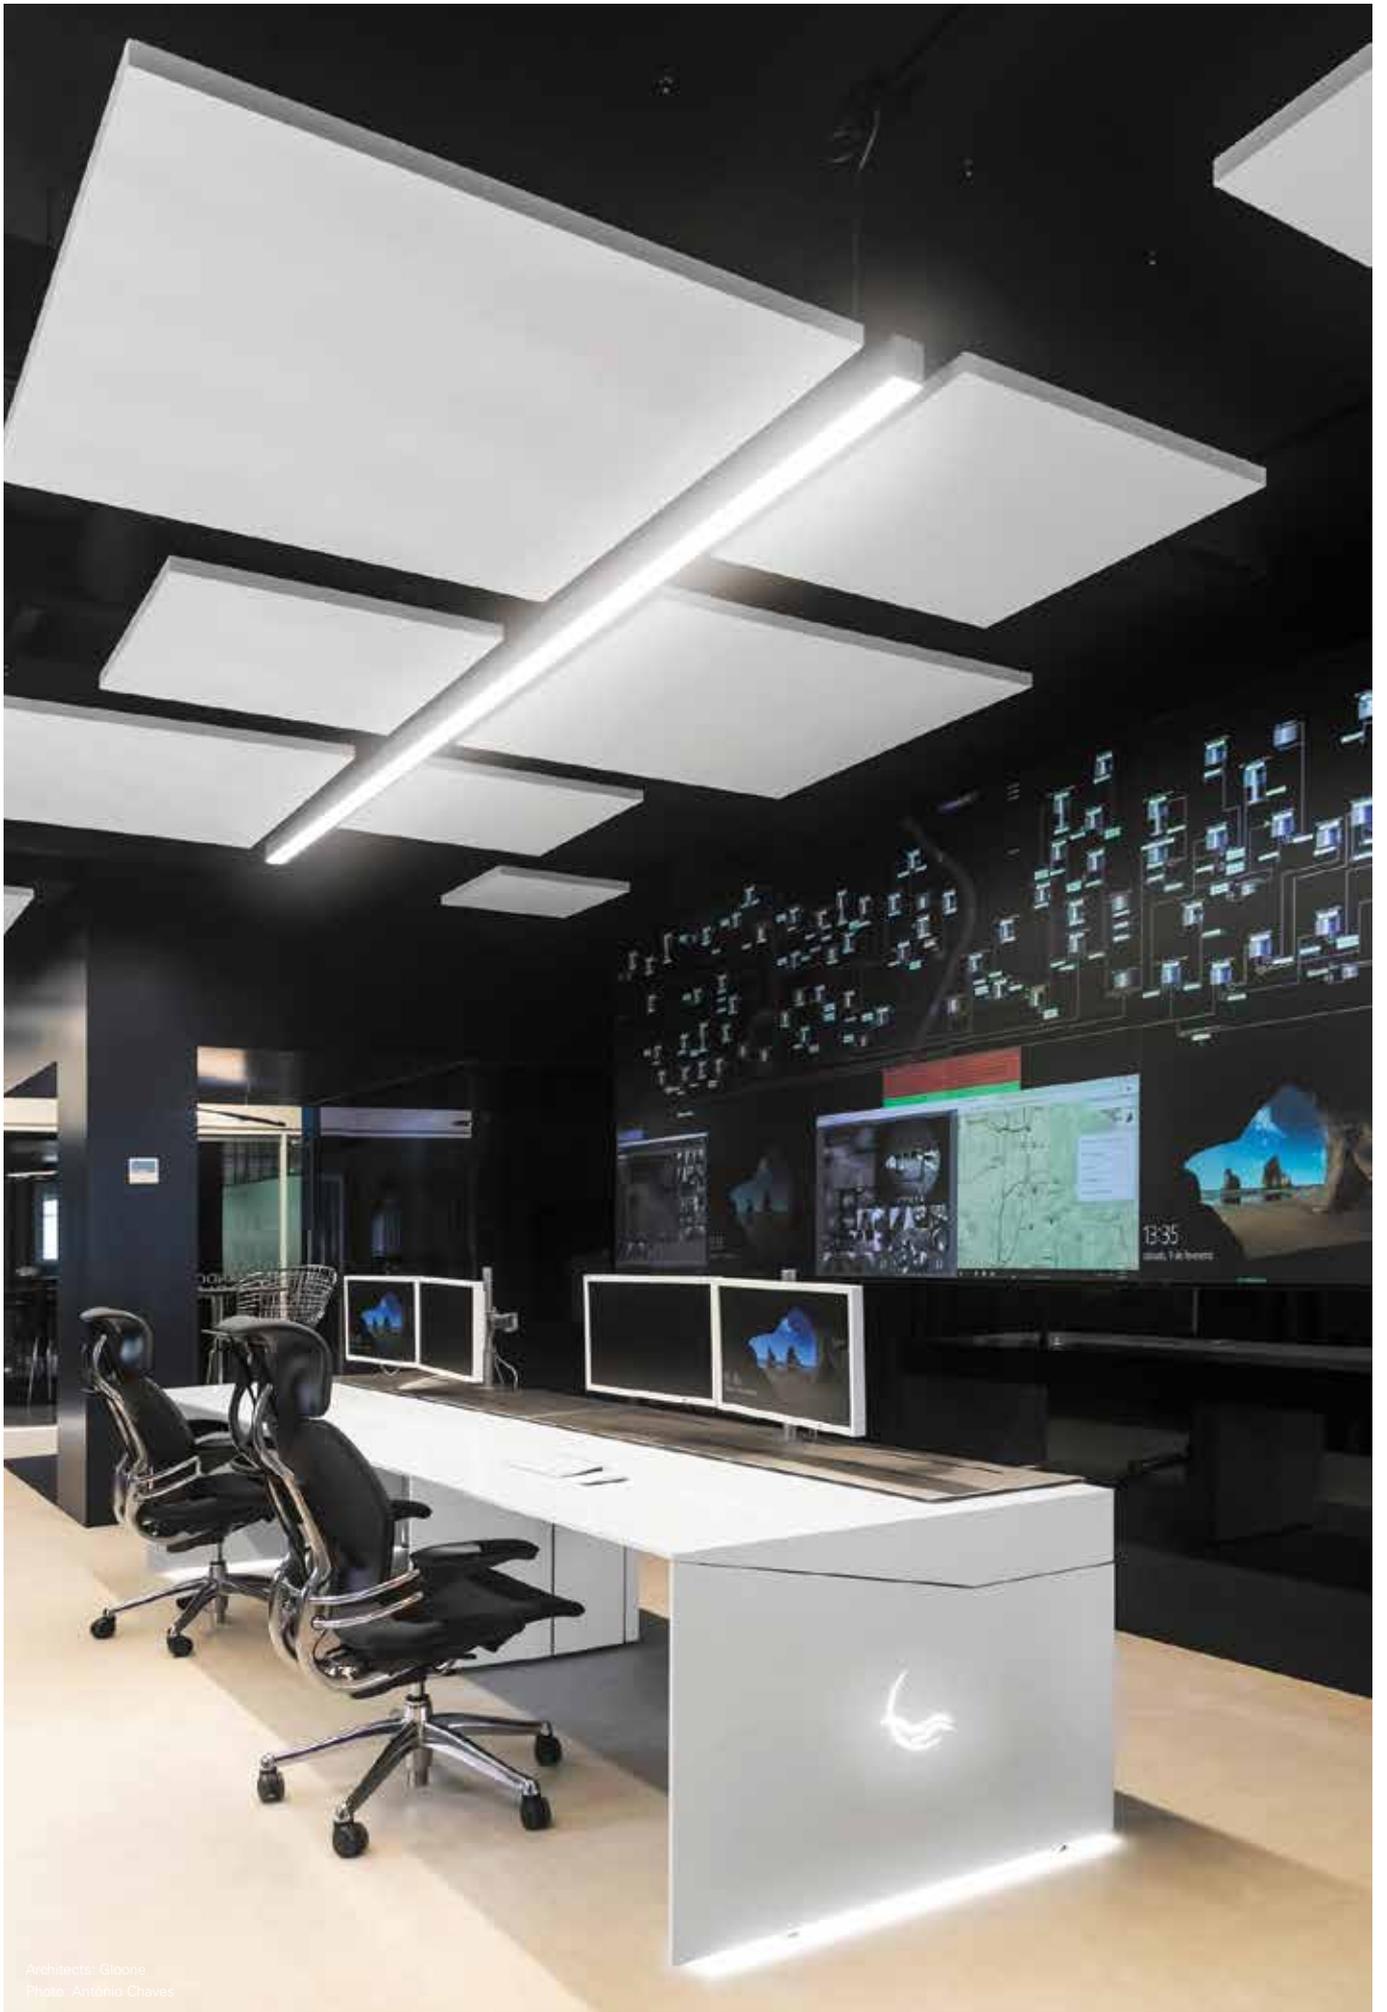

Architects: Glebno
Photo: Antonio Chaves