


ROFY 60 Sq D/I

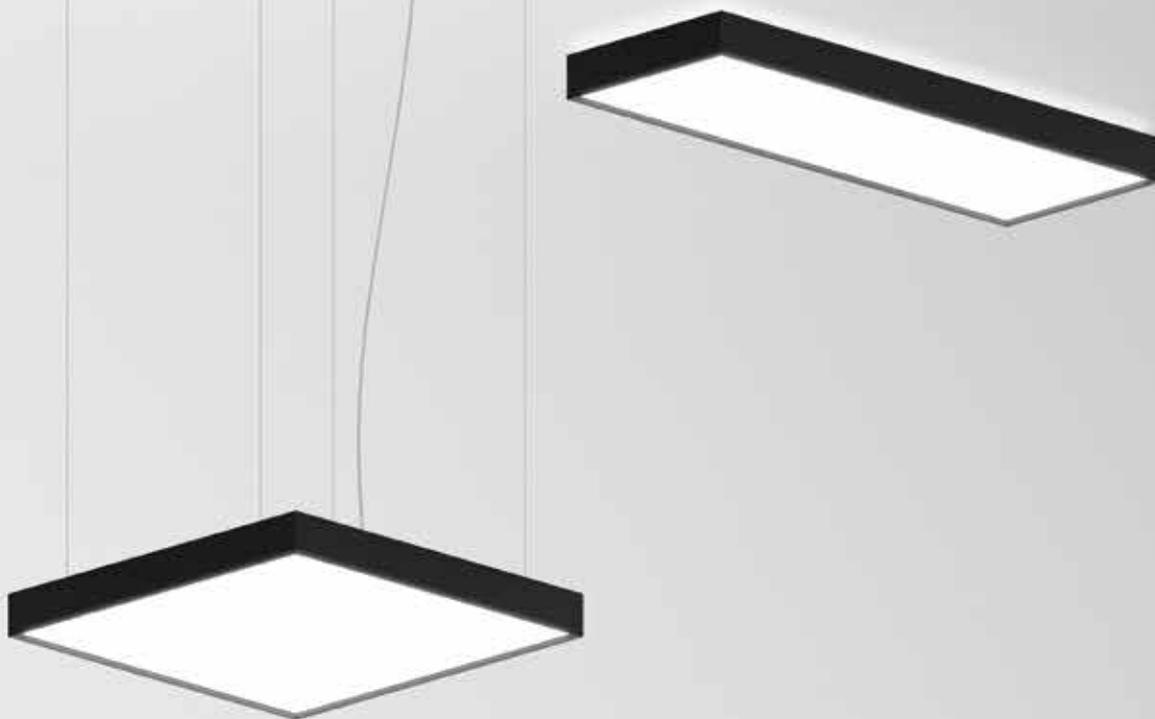

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40


K 04

650°C


01. Select version



ROFY 60 Sq D/I




gCONTROL+ - Microprismatic diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤16	18	2231	124	286x286	90714L286▼▲◆0◆00
≤19	60	7753	129	550x550	90714L550▼▲◆◆◆00
≤19	33	3967	120	550x286	90714L552▼▲◆0◆00
≤19	48	5963	124	814x286	90714L812▼▲◆◆◆00
≤19	60	7935	132	1078x286	90714L102▼▲◆◆◆00
≤19	75	9912	132	1342x286	90714L132▼▲◆◆◆00

LIGHT+ - Opal diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	18	2325	129	286x286	90716L286▼▲◆0◆00
≤22	60	8081	135	550x550	90716L550▼▲◆◆◆00
≤22	33	4135	125	550x286	90716L552▼▲◆0◆00
≤22	48	6215	129	814x286	90716L812▼▲◆◆◆00
≤22	60	8270	138	1078x286	90716L102▼▲◆◆◆00
≤22	75	10330	138	1342x286	90716L132▼▲◆◆◆00

ROFY 60 Sq D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee total light uniformity on the ceiling in the suspended version, installation must be carried out at a minimum distance of 500 mm.

*Replace the symbols to complete the code

Control gear

HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Colour³

□ White	W
■ Grey	G
■ Black	B
■ Sahara	0
■ Mist	1
■ Carbon	I
■ Autumn	L
■ Rusty chain	R
■ Jungle	N
■ Golden eye	D

Emergency

No EM	0
EM 3h (K3) ⁴	3

Colour temp.

3000K	3
4000K	0
Tunable White	T

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ See page 164.

⁴ Prepared for emergency remote control. Only available for the L550x550, L814, L1078 and L1342 mm versions.

02. Select options

OPTIONS	Code*
Suspension	
S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043
Transparent current supply cable	
L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602
<ul style="list-style-type: none"> • For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm². 	
Ceiling rose	
Surface mounted T25 45  100	978610▲
Surface mounted T29 (DALI+K3)	978611▲
Recessed T7  Ø70 35  90	971400▲
Recessed T59 (DALI+K3)	971410▲
Low Output version	
<ul style="list-style-type: none"> • Under request. 	




*Replace the symbols to complete the code

Colour	▲
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



Indirect light



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses

