

TTP 50



Product characteristics

Body
Polycarbonate tube

Finish
White matte powder coated
gear tray

Fixing system
Clamps not included


Optical system
TUP - Transparent diffuser
TOP - Opal diffuser

Wiring
1500 mm H07RN-F cable
and plastic cable gland included

Light source
LED, RG0, CRI>80, MacAdam Step ≤3

LED lifetime
80.000h @ L90, B10, Ta 25°C


Control gear
LED driver 220-240V-50/60Hz included




01. Select version



LOW OUTPUT




TUP - Transparent diffuser



W	lm output	lm/W	Lmm	CODE*
12	1868	156	620	90473L060▼▲0◆00
17	2802	165	900	90473L090▼▲0◆00
21	3735	178	1180	90473L120▼▲0◆00
26	4669	180	1460	90473L150▼▲0◆00

TOP - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
12	1573	131	620	90472L060▼▲0◆00
17	2359	139	900	90472L090▼▲0◆00
21	3146	150	1180	90472L120▼▲0◆00
26	3932	151	1460	90472L150▼▲0◆00

*Replace the symbols to complete the code


Control gear	
HF	E
DALI	H

End caps	
Polycarbonate ¹	0
Stainless steel ²	S


Emergency	
No EM	0
EM 3h (K3) ³	3

Colour temp.	
3000K	3
4000K	0
Tunable White ⁴	T

HIGH OUTPUT




TUP - Transparent diffuser



W	lm output	lm/W	Lmm	CODE*
26	3982	153	620	90471L060▼▲0◆00
40	5973	149	900	90471L090▼▲0◆00
51	7964	156	1180	90471L120▼▲0◆00
63	9954	158	1460	90471L150▼▲0◆00

TOP - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
26	3419	132	620	90470L060▼▲0◆00
40	5129	128	900	90470L090▼▲0◆00
51	6838	134	1180	90470L120▼▲0◆00
63	8548	136	1460	90470L150▼▲0◆00

LOW OUTPUT | HIGH OUTPUT

- To complete the product add the fixing system. Please order separately.
- For suspended version add the suspension and ceiling rose. Please order separately.
- The luminaire with sensor has 130 mm more than the standard length.

¹ Transparent injected polycarbonate end caps. The product is class II.

² Stainless steel end caps. The product is class I.

³ 3h emergency unit with self-test. Only available in HF versions.

⁴ Only available for the DALI without emergency unit versions (No EM).

02. Select options

OPTIONS		Code*
SwitchDIM Tunable White 926600		
• The SwitchDIM Tunable White allows the control of up to 20 luminaires.		
Fixing system		
PVC clamp D50 (x2)	 26 69 17	915001
Stainless steel clamp with clip D50 (x2)	 14 60 10	915003
Stainless steel clamp A1 D50 (x2)	 36 65 20	915303
Stainless steel clamp A2 D50 (x2)	 56 63 20	915305
Stainless steel clamp with fast lock D50 (x2)	 29 67 20	915304
Suspension		
S4 L1500 mm (x2)		910200
Ceiling rose ¹		
Surface mounted T24 D95	45  Ø95	978600▲
Recessed T5 D90	 Ø70 33  Ø90	971300▲
Cable gland for HF versions		
Metal M16 (x1)		925000
Breathable metal M16 (x1)		926700
Cable gland for DALI versions		
Metal M20 (x1)		925001
Breathable metal M20 (x1)		926701
Sensor		
• Under request.		
• Detection range: 100%. Hold time: 5s.		
Daylight Threshold: disabled. For other types of programming, consult the sensor's instructions manual.		
Sensor and emergency unit (3 hours)		
• Under request.		





*Replace the symbols to complete the code

Colour ▲
 White W
 Black B



Product details

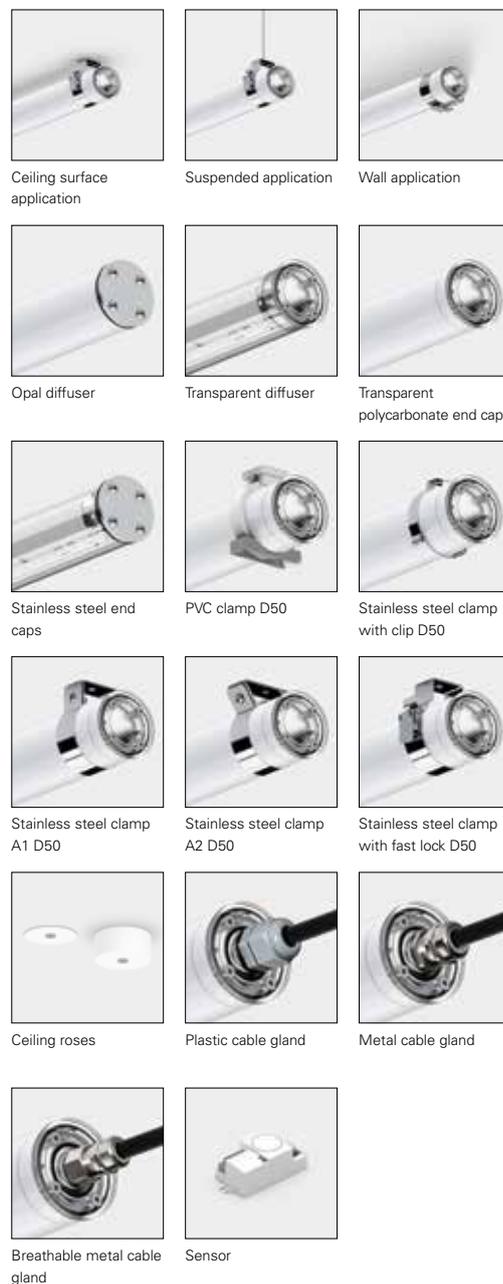

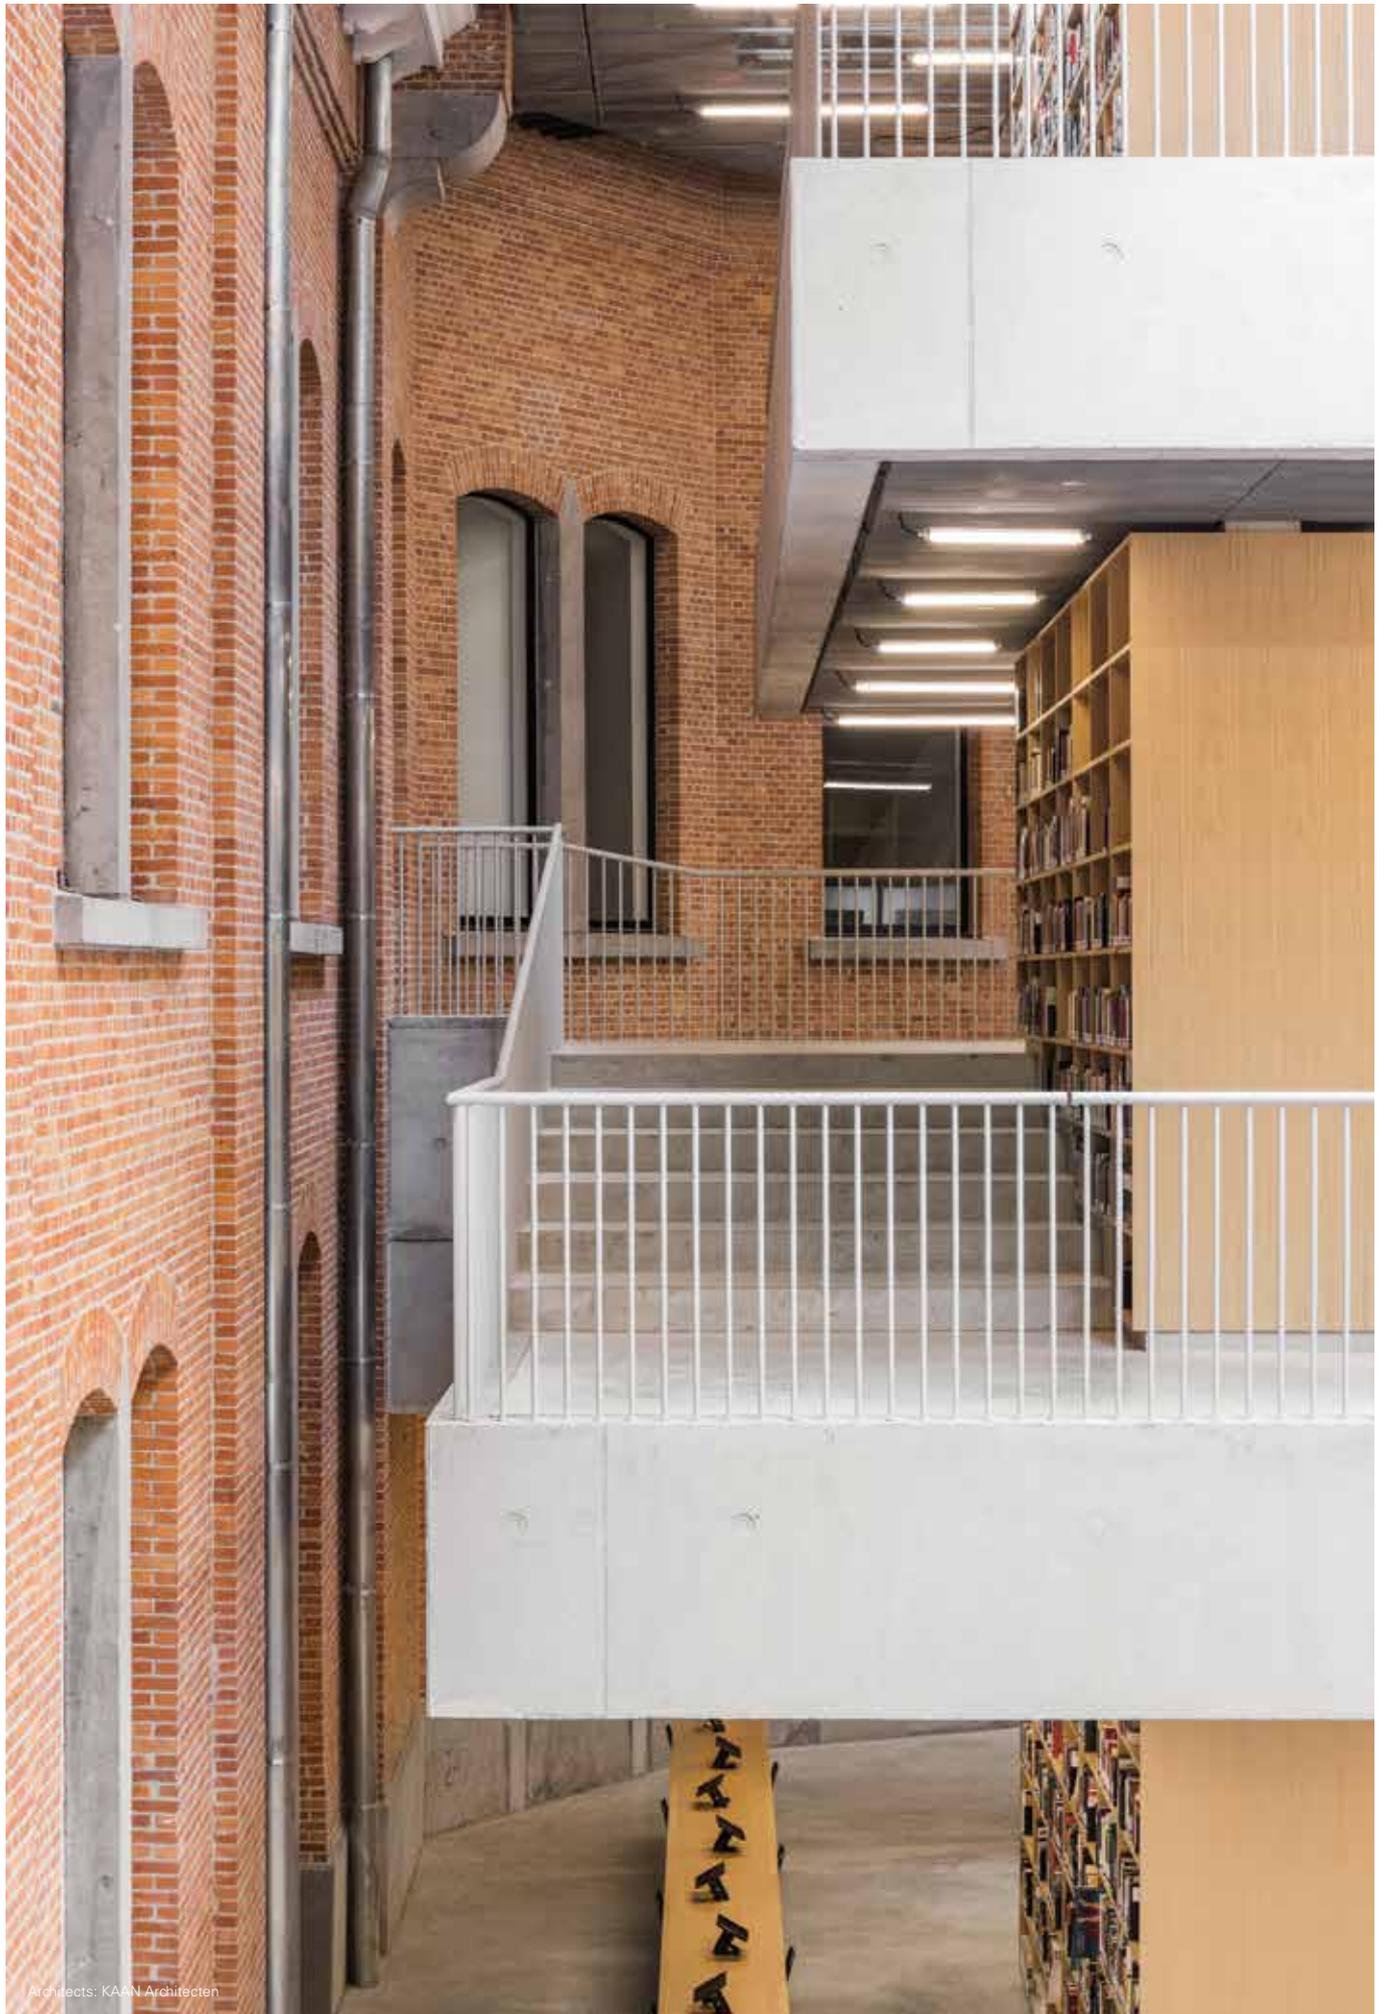

Architects: KAAN Architecten