

Product No.	X015DTLT-B10	Page No.	1/ 17
Release date	2021/04/21	Revision	1.0

SPECIFICATION

PRODUCT NO. : X015DTLT-B10
VERSION : Ver 1.0
ISSUED DATE : 2021-04-21

This module uses ROHS material

FOR CUSTOMER: _____

☐: APPROVAL FOR SPECIFICATION

☒: APPROVAL FOR SAMPLE

DATE	APPROVED BY

Xinli Optoelectronics :

Presented by	Reviewed by	Organized by

Note:

- 1.Xinli Optronics reserves the right to make changes without further notice to any products herein to improve reliability, function or design.
- 2.All rights are reserved. No one is permitted to reproduce or duplicate the whole or part of this document without Xinli Optronics' permission.

Product No.	X015DTLT-B10	Page No.	2/ 17
Release date	2021/04/21	Revision	1.0

1. Revision Recode

[illegible]

Product No.	X015DTLT-B10	Page No.	3/ 17
Release date	2021/04/21	Revision	1.0

2. General Description and Features

2.1 Overview

The 1.5 inch Module named X015DTLT-B10 is a-Si TFT-LCD module, which is the type of transmissive. It is consisted of TFT-LCD Panel, one Driver IC, one FPC, one Back-Light unit and one CTP. Features of this product are listed in the following table.

2.2 General Specification

NO	Item	Contents	Unit
(1)	Module Outline	33*36*2.91	mm
(2)	LCD Active area	27.72*27.72	mm
(3)	Dot Number	240*3(RGB)*240	/
(4)	Dot size	0.1155*0.1155	mm
(5)	LCD type	TFT Transmissive, Normally black	/
(6)	Display Color	65K	/
(7)	Viewing direction	Free	O'clock
(8)	Backlight Type	3-chips LEDs	/
(9)	Power Supply	2.8(TYP)	V
(10)	Drive IC	NV3030A	/
(11)	Interface type	MCU interface	
(12)	Module weight	TBD	/

Technical drawing of a camera module showing front, side, and top views with dimensions and labels.

Front View Dimensions:

- Top: 36 ± 0.05
- Inner Top: 28.32 TP VA, 27.72 LCM AA
- Right: 33 ± 0.05 CG OD, 28.32 TP VA, 27.72 LCM AA, (2.64)
- Bottom: 34.39 sensor OD
- Left: 0.25 CG, 0.2 AIR BONDING, 1.91 ± 0.2 LCM, total 2.91 ± 0.25

Side View Dimensions:

- Top: 33.72 ± 0.2 LCM OD
- Right: 32.22 ± 0.15 sensor OD, 0.39 , 0.74
- Bottom: 0.48

Top View Dimensions:

- Left: 0.05 mm, 0.2 mm, 0.05 mm, 0.2 mm
- Right: 0.05 mm, 0.2 mm, 0.05 mm, 0.2 mm

Labels and Notes:

- DOTS: 240×240
- TFT: $1.54''$
- ALL VIEW
- BLACK
- FR4 strength
- IC
- LCM: IR-37B-240P-0.4V (G1)
- CUSTOMER: IR-37B-240S-0.4V (G1)
- High temperature tape on the surface
- Prohibited area (no components can be placed, wires can be routed)
- LED+ → → → → LED+
- LED- → → → → LED-
- CTP PIN
- Pin Assignment
- 1. GND
- 2. RESET
- 3. GND
- 4. DB88
- 5. DB87
- 6. DB86
- 7. DB85
- 8. DB84
- 9. DB83
- 10. DB82
- 11. DB81
- 12. DB80
- 13. DB79
- 14. DB78
- 15. DB77
- 16. DB76
- 17. DB75
- 18. DB74
- 19. DB73
- 20. DB72
- 21. DB71
- 22. DB70
- 23. DB69
- 24. DB68

Notes:

1. DISPLAY TYPE: $1.54''$ IPS/ 240×240 , TRANSMISSIVE, NORMAL BLACK;
2. OPERATING TEMP: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$;
3. STORAGE TEMP: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$;
4. DRIVER IC: ST7789V2;
5. Brightness (w/o ctp): 250cd/m^2 (typ);
6. VIEWING DIRECTION: ALL;
7. TP IC: DS, CHSC6417EU24;
8. GENERAL TOLERANCE: $\pm 0.2\text{mm}$;

Legend:

- LED+ → → → → LED+
- LED- → → → → LED-

Table:

MARK REV.	CHANGE CONTENT	BY	STATE	DATE
	First Release			21/3/22

Table:

DRAWING TITLE	LCM	DESIGN	CHECKED	APPROVED
DRAWING No.	X015D11-B10			
FILE No.				

Table:

SCALE : --	UNIT : MM
REV. : A0	SHEET : 1/1

Table:

PINNAME	CTP PIN
1. VDDP	1
2. SCL	2
3. SDA	3
4. EN1	4
5. RES1	5
6. GND	6
7. GND	7
8. NC	8
9. GND	9
10. GND	10

Product No.	X015DTLT-B10	Page No.	5/ 17
Release date	2021/04/21	Revision	1.0

4. Interface Pin Connection

4.1 LCM

NO	Symbol	Level	Description																														
1	GND	P	Ground																														
2	RESET	I	This signal will reset the device and must be applied to properly initialize the chip. Signal is active low.																														
3	GND	P	Ground																														
4	DB8	I/O	data bus																														
5	DB7	I/O	data bus																														
6	DB6	I/O	data bus																														
7	DB5	I/O	data bus																														
8	DB4	I/O	data bus																														
9	DB3	I/O	data bus																														
10	DB2	I/O	data bus																														
11	DB1	I/O	data bus																														
12	DB0	I/O	data bus																														
13	IM1	I	Select the system interface mode <table><tr><th rowspan="2">IM3</th><th rowspan="2">IM2</th><th rowspan="2">IM1</th><th rowspan="2">IM0</th><th rowspan="2">interface Mode</th><th colspan="2">DB pins</th></tr><tr><th>Register</th><th>Gram</th></tr><tr><td>0</td><td>0</td><td>0</td><td>0</td><td>i80-system 8-bit interface I</td><td>DB[7:0]</td><td>DB[7:0]</td></tr><tr><td>0</td><td>0</td><td>0</td><td>1</td><td>i80-system 16-bit interface I</td><td>DB[7:0]</td><td>DB[15:0]</td></tr><tr><td>0</td><td>0</td><td>1</td><td>0</td><td>i80-system 9-bit interface I</td><td>DB[7:0]</td><td>DB[8:0]</td></tr></table>	IM3	IM2	IM1	IM0	interface Mode	DB pins		Register	Gram	0	0	0	0	i80-system 8-bit interface I	DB[7:0]	DB[7:0]	0	0	0	1	i80-system 16-bit interface I	DB[7:0]	DB[15:0]	0	0	1	0	i80-system 9-bit interface I	DB[7:0]	DB[8:0]
IM3	IM2	IM1	IM0						interface Mode	DB pins																							
				Register	Gram																												
0	0	0	0	i80-system 8-bit interface I	DB[7:0]	DB[7:0]																											
0	0	0	1	i80-system 16-bit interface I	DB[7:0]	DB[15:0]																											
0	0	1	0	i80-system 9-bit interface I	DB[7:0]	DB[8:0]																											
14	/RD	I	A read strobe signal and enables an operation to read out data when the signal is low.																														
15	/WR	I	Chip select signal																														
16	RS	I	This pin is used to select “Data or Command” in the parallel interface.																														
17	/CS	I	A chip select signal.																														
18	IOVCC	P	I/O voltage																														
19	FAMARK	I/O	A power output of grayscale voltage generator.																														

Product No.	X015DTLT-B10	Page No.	6/ 17
Release date	2021/04/21	Revision	1.0


20	VCI	P	Analog Power
21	GND	P	Ground
22	LEDA	P	A
23	LEDK	P	K
24	GND	P	Ground

4.2 CTP


NO	Symbol	Level	Description
1	VDD2.8V	P	/
2	SCL	I/O	/
3	SDA	I/O	/
4	INT	I/O	/
5	RESET	I/O	/
6	GND	P	/
7	GND	P	/
8	NC	-	/
9	GND	P	/
10	GND	P	/

Product No.	X015DTLT-B10	Page No.	7/ 17
Release date	2021/04/21	Revision	1.0

5. Block Diagram

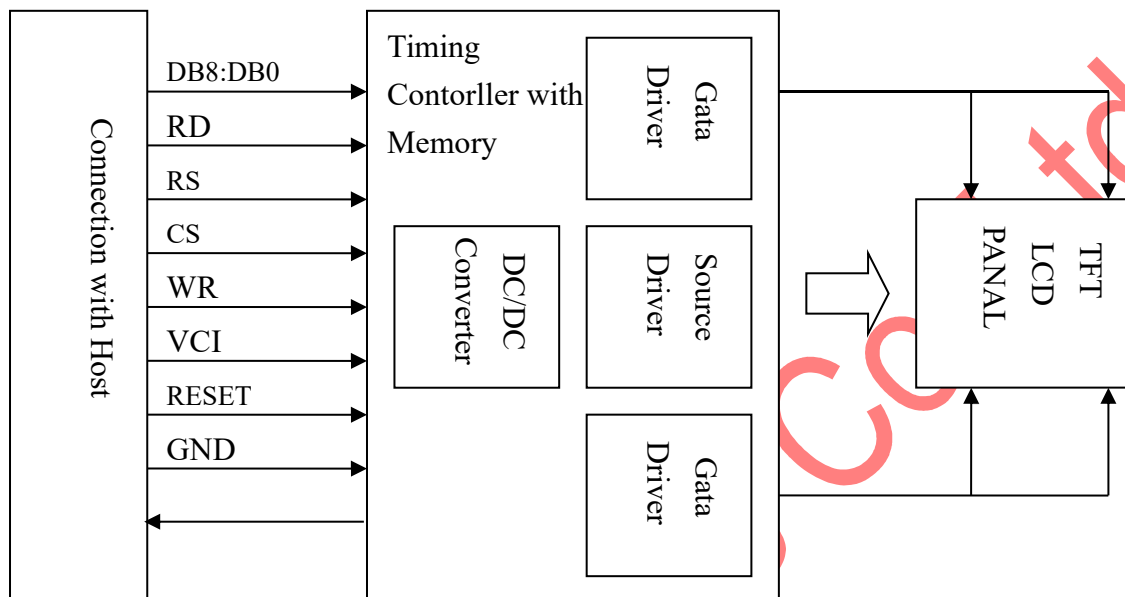

6.



Product No.	X015DTLT-B10	Page No.	8/ 17
Release date	2021/04/21	Revision	1.0

6. Maximum Rating

Item	Symbol	Rating	Unit
Operating temperature	Top	-20 to 70	°C
Storage temperature	Tst	-30 to 80	°C
Supply voltage for internal logic	VCC	-0.3V ~ 4.0	V

NOTE:

If the module was used these absolute maximum ratings as above, it may be damaged permanently. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability. VCC>GND must be maintained.

7. Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Analog power supply	VCI	—	2.5	2.8	3.3	V
Module current	Ivcc	—	-	-	-	mA
Logic input signal Voltage	H level	V _{IH}	0.7*VCI	-	VCI	V
	L level	V _{IL}	-0.3V	-	0.3* VCI	V
Logic output signal Voltage	H level	V _{OH}	0.8*VCI	-	VCI	V
	L level	V _{OL}	-	-	0.2* VCI	V


8. Backlight Characteristics

Item	syb	Min	Typ	Max	Unit	Condition
Voltage	Vf	-	-	-	V	-
Number of LED	-	3			pcs	-
Power Consumption	PWF	-	-	-	mW	-
LED life-span	-	-	(20000)	-	Hrs	-

Product No.	X015DTLT-B10	Page No.	9/ 17
Release date	2021/04/21	Revision	1.0

9. Timing Characteristics

There is 1 pixel (3 sub-pixels) per 2-byte

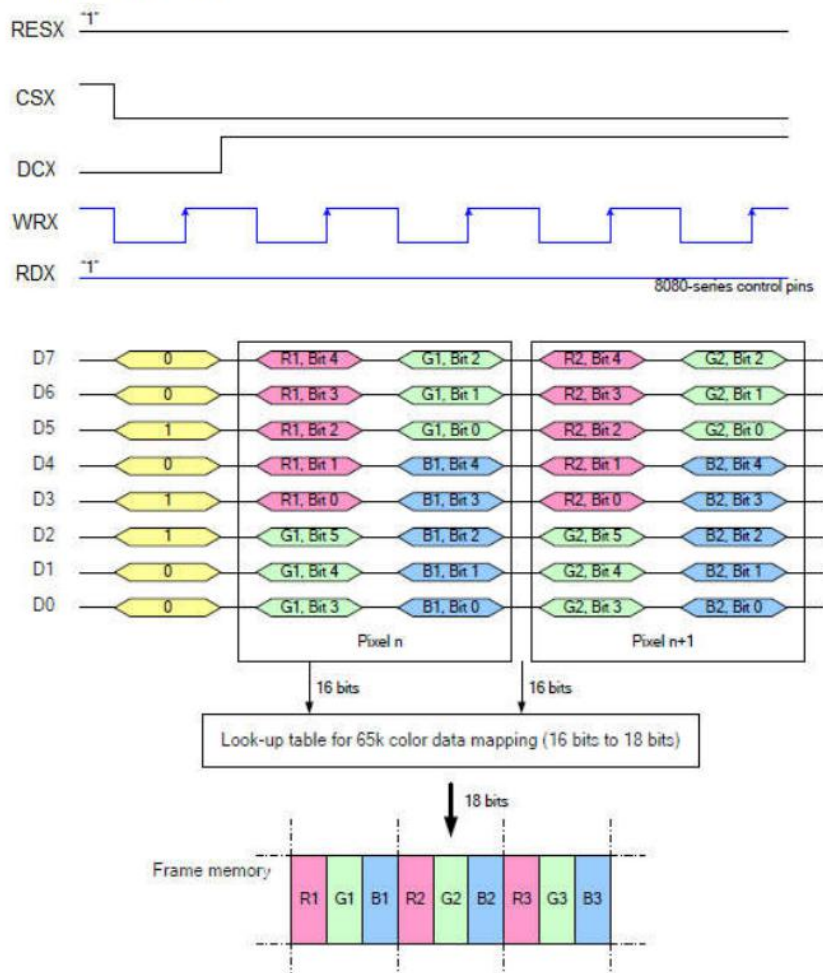



Note 1: The data order is as follows, MSB=D15, LSB=D0 and picture data is MSB=Bit 5, LSB=Bit 0 for Green, and MSB=Bit 4, LSB=Bit 0 for Red and Blue data.

Note 2: 2-times transfer is used to transmit 1 pixel data with the 16-bit color depth information.

Note 3: '-' = Don't care – Can be set to '0' or '1'.

Product No.	X015DTLT-B10	Page No.	10/ 17
Release date	2021/04/21	Revision	1.0

There is 1 pixel (3 sub-pixels) per 3-bytes.

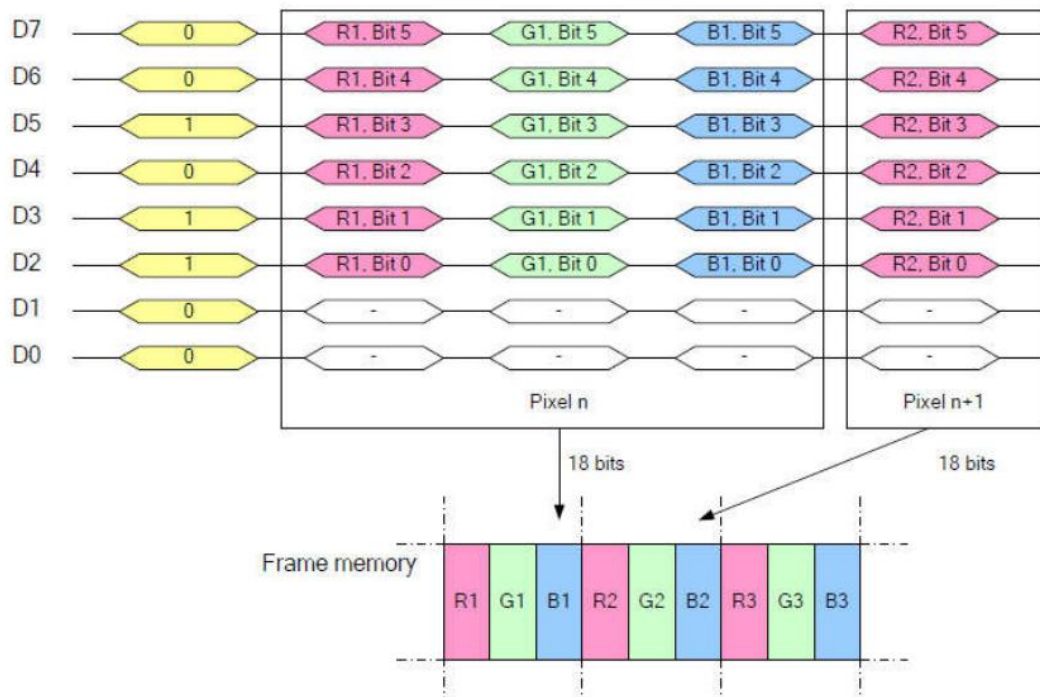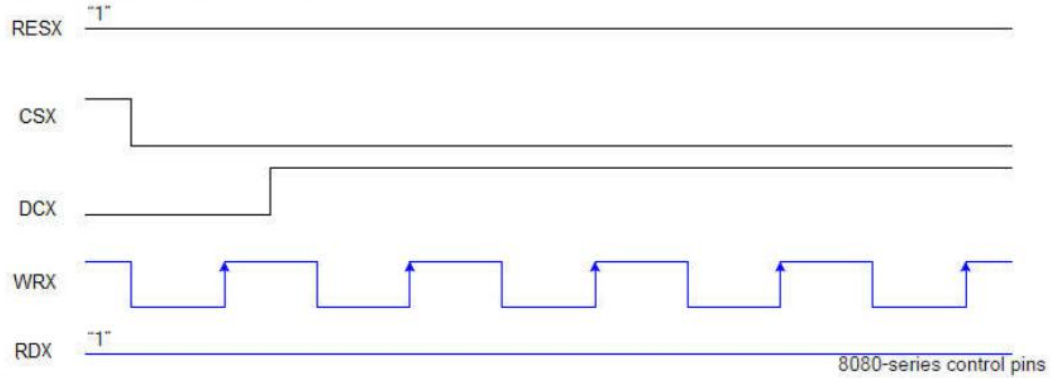


Note 1: The data order is as follows, MSB=D7, LSB=D0 and picture data is MSB=Bit 5, LSB=Bit 0 for Red, Green and Blue data.

Note 2: 3-times transfer is used to transmit 1 pixel data with the 18-bit color depth information.

Note 3: '-' = Don't care – Can be set to '0' or '1'.

Product No.	X015DTLT-B10	Page No.	11/ 17
Release date	2021/04/21	Revision	1.0

10.3.2 Parallel Interface Timing Characteristics(8080 series 8/9/16/18-Bit Parallel Interface)

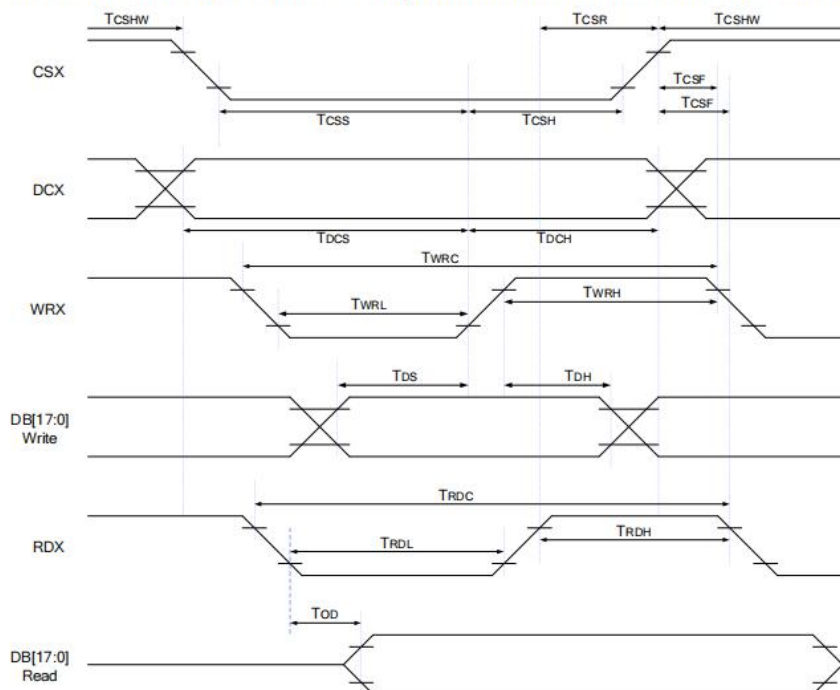

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T _{CSS}	CSX setup time	15	-	ns	
	T _{Csh}	CSX hold time	15	-	ns	
	T _{Csf}	CSX falling edge before WRX/RDX falling edge	10	-	ns	
	T _{Cshw}	CSX high level width	0	-	ns	
	T _{Csr}	CSX rising edge after RDX rising edge	0	-	ns	
DCX	T _{Dcs}	DCX setup time	10	-	ns	
	T _{Dch}	DCX hold time	10	-	ns	
WRX	T _{wrc}	WRX cycle	30	-	ns	
	T _{wrl}	WRX low pulse duration	10	-	ns	
	T _{wrh}	WRX high pulse duration	10	-	ns	
DB[17:0] Write	T _{ds}	Write data setup time	10	-	ns	Write
	T _{dh}	Write data hold time	10	-	ns	
RDX	T _{rdc}	RDX cycle	160	-	ns	
	T _{rdl}	RDX low pulse duration	48	-	ns	
	T _{rdh}	RDX high pulse duration	48	-	ns	
DB[17:0] Read	T _{od}	Read data output delay	-	30	ns	Read

Note: Ta=-30℃~70℃, VDDI=1.65V to 3.6V, VCI=2.5V to 3.3V, VSSA=VSSD=0V.

Product No.	X015DTLT-B10	Page No.	12/ 17
Release date	2021/04/21	Revision	1.0

10. Application Circuit

Please consult our technical department for detail information.

11. Initial Code

Please consult our technical department for detail information.

12. Electro-Optical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit	Note	
Response time	Tr	$\theta = 0^{\circ}$	-	20	25	ms	4	
	Tf	$\phi = 0^{\circ}$	-	10	15	ms		
Uniformity (Five point)	δ WHITE	$Ta = 25^{\circ}C$	-	85	-	%	7	
Contrast ratio	Cr		700	900	-	-	3,5	
Surface Luminance	Lv		-	250	-	-	3,7	
Viewing angle range	θ	$\phi = 90^{\circ}$	-	80	-	deg	6	
		$\phi = 270^{\circ}$	-	80	-	deg		
		$\phi = 0^{\circ}$	-	80	-	deg		
		$\phi = 180^{\circ}$	-	80	-	deg		
Color filter chromaticity (x, y)	White	X	$\theta = \phi = 0^{\circ}$	TBD	TBD	TBD	deg	7
		Y		TBD	TBD	TBD		
	Red	X		TBD	TBD	TBD	deg	
		Y		TBD	TBD	TBD		
	Green	X		TBD	TBD	TBD	deg	
		Y		TBD	TBD	TBD		
	Blue	X		TBD	TBD	TBD	deg	
		Y		TBD	TBD	TBD		


Note 1: Ambient temperature= $25^\circ\text{C} \pm 2^\circ\text{C}$

Note 2: To be measured in the dark room with backlight unit.

Note 3: To be measured at the center area of panel with a viewing cone of 1 by Topcon luminance meter BM-7A, after 10 minutes operation (module).

The copyright belongs to XINLI. Any unauthorized use is prohibited.


Product No.	X015DTLT-B10	Page No.	13/ 17
Release date	2021/04/21	Revision	1.0

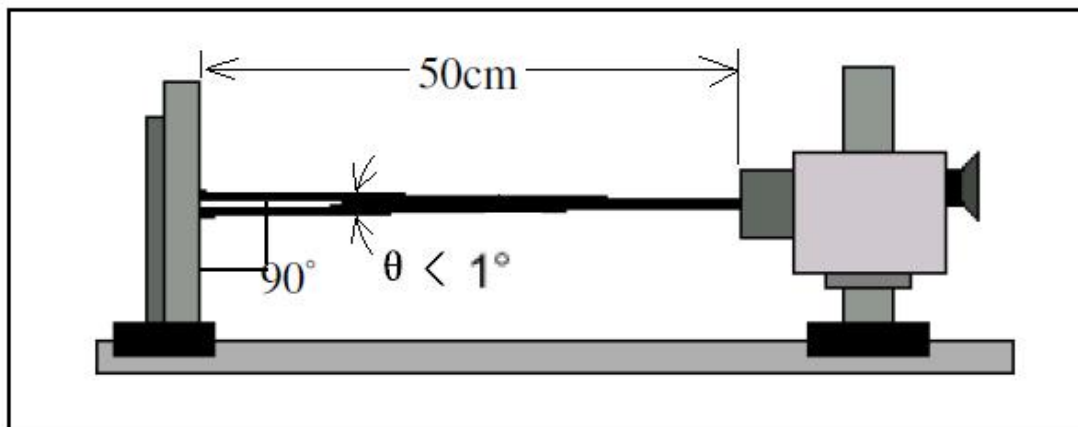

Note 4: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “black” to “white” (rising time) and from “white” to “black” (falling time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes.

Refer to figure as below.

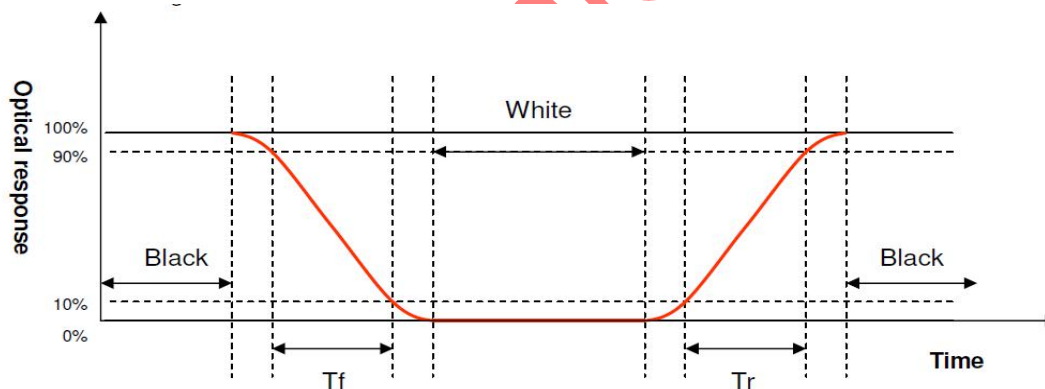

Note 5. Definition of contrast ratio:

Contrast ratio is calculated with the following formula:


$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 6. Definition of viewing angle

Viewing angle is the angle at which the contrast ratio is greater than 2, for TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal


Product No.	X015DTLT-B10	Page No.	14/ 17
Release date	2021/04/21	Revision	1.0

to the LCD surface.

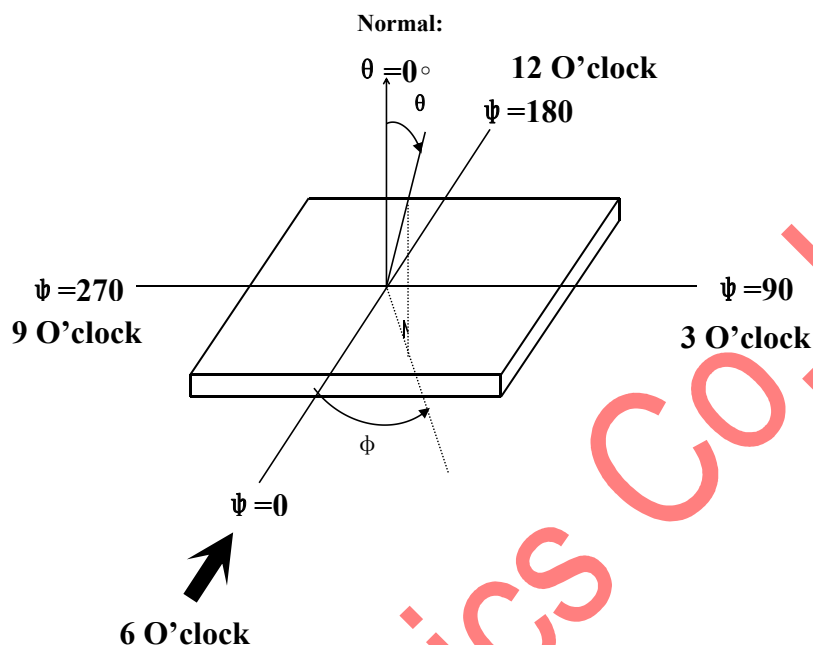

Note 7. Surface luminance is the LCD surface from the surface with all pixels displaying white. Refer to figure as below.

Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity

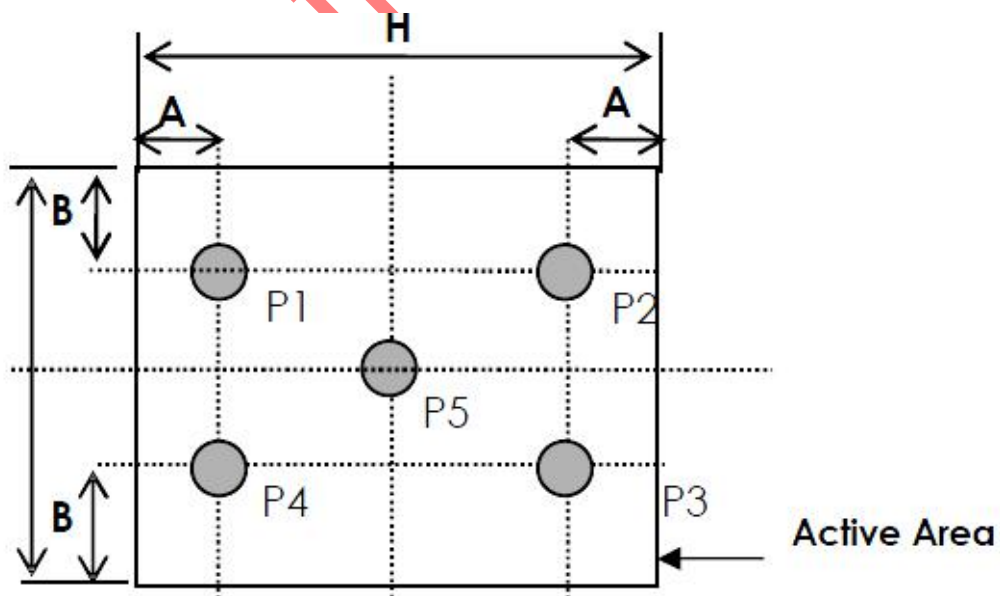

A : 5 mm B : 5 mm H,V : Active Area

Light spot size $\varnothing=7\text{mm}$, 500mm distance from the LCD surface to detector lens

Product No.	X015DTLT-B10	Page No.	15/ 17
Release date	2021/04/21	Revision	1.0

measurement instrument is TOPCON's luminance meter BM-7A

Uniformity definition= [min of 5point/max of 5points]x100%

Lv = Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)

13. Reliability Test

This standard reliability test is done only for the first lot of MP products. Customer and supplier must hold a discussion if other reliability test is requested by customer.

is requested by customer.

NO	Test Item	Description	Test Condition
1	High temperature storage	Endurance test applying the high storage temperature for a long time	80℃, 240H
2	Low temperature storage	Endurance test applying the low storage temperature for a long time	-30℃, 240H

Product No.	X015DTLT-B10	Page No.	16/ 17
Release date	2021/04/21	Revision	1.0

3	High temperature operation	Endurance test applying the electric stress under high temperature for a long time	70℃, 240H
4	Low temperature operation	Endurance test applying the electric stress under low temperature for a long time	-20℃, 240H
5	High temperature/humidity storage	Endurance test applying the high temperature and high humidity storage for a long time	60℃, 90%RH
6	Temperature Cycle/humidity storage	<p>Endurance test applying the low and high temperature cycle</p> <p>-40℃ ← → 25℃ ← → 90℃</p> <p>30min ← → 5min ← → 30min</p> <p>←—————→</p> <p>one cycle</p>	-40℃/80℃, 168cycles
7	ESD Test/Non-operating	150pF, 330ohm	Voltage: ±8KV (contact discharge); ±15KV (air discharge)
8	FPC(pull-plugging test and flexural test)	To check the product after FPC pull-plugging test and flexural test	Pull-plug: 10 times under normal use; Flexural: Radian ≥ 0.38mm 10 times

14. Precautions for Operation and Storage

1. Precautions for Operation

- (1) Since LCD panel made of glass, in order to prevent from glass broken or color tone change, please do not apply any mechanical shock or impact or excessive force to it when installing the LCD module.
- (2) If LCD panel is broken and liquid crystal substance leaks out and contact your skin or clothes, please immediately wash it off by using soap and water.
- (3) The polarizer on the LCD surface is soft and easily scratched. Please be careful when handling.

The copyright belongs to XINLI. Any unauthorized use is prohibited.

Product No.	X015DTLT-B10	Page No.	17/ 17
Release date	2021/04/21	Revision	1.0

(4) If LCD surface becomes contaminated, please wipe it off gently by using moisten soft cloth with normal hexane, do not use acetone, ketone, ethanol, alcohol or water. If there is saliva or water on the LCD surface, please wipe it off immediately.

(5) When handing LCD module, please be sure that the body and the tools are properly grounded. And do not touch I/F pins with bare hands or contaminate I/F pins.

(6) Do not attempt to disassemble or process the LCD module.

(7) LCD module should be used under recommended operating conditions shown in chapter 6 and 7.

(8) Response time will be extremely slower at lower temperature than at specified temperature and LCD will show different color when at higher temperature. The phenomenon will disappear when returning to specified condition.

(9) Foggy dew, moisture condensation or water droplets deposited on surface and contact terminals will cause polarizer stain or damage, the deteriorated display quality and electrochemical reaction then leads to the shorter life time and permanent damage to the module probably. Please pay attention to the environmental temperature and humidity.

2. Precautions for Storage

(1) Please store LCD module in a dark place, avoid exposure to sunlight, the light of fluorescent lamp or any ultraviolet ray.

(2) Keep the environment temperature at between 10°C and 35 °C and at normal humidity. Avoid high temperature, high humidity or temperature below 0°C.

(3) That keeps the LCD modules stored in the container shipped from supplier before using them is recommended.

(4) Do not leave any article on the LCD module surface for an extended period of time.

3. Warranty period

Warrants for a period of 12 Months from the shipping date when stored or used under normal condition.

15. Package Specification

TBD