

# ResoEdge L30



## Product Information & Technical Data Sheet

Resonate ResoEdge L30 are 'L' shaped soundproofing strips installed around the floor perimeter of acoustic floor treatments. They isolate the acoustic flooring from the walls and skirting boards / door frames, and prevent potential acoustic flanking transmission occurring.

### Practical, Appealing Acoustics


The ResoEdge L30 are manufactured in white, the same colour as the majority of door frames and skirting boards. This provides a significant benefit over coloured alternatives that can effect the visual appearance of the floor finish.

ResoEdge L30 should be installed with all our acoustic flooring treatments, in order to achieve Part E Building regulations.



### System Components

1. Resonate ResoEdge L30 acoustic flanking strips

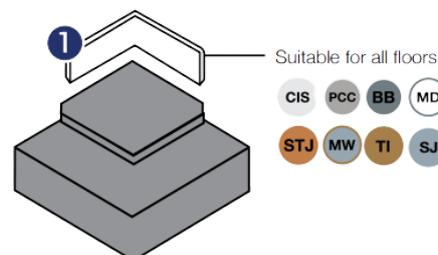

### Dimensions

#### Strip Size

9mm (T) x 32mm (W) x 2m (L) x 32mm (H)

#### Working Temperature

-40 / 60 degrees C

#### Water Absorption

0.02 - 0.03 mg/cm<sup>2</sup>

#### Material

Extruded closed cell polylene foam


#### Colour

White

### Key Benefits



**White colour speeds up build times compared to other colour options**



**Isolate floating floor and prevent floors failing Part E sound testing**



**Light weight, easy to handle and quick to install**



**100% recyclable  
Zero VOC's, Zero CFC's  
Zero ODPs, GWP <5**