



VxT-15

Module for protection against **transient overvoltages**.

Type 2.




V2T-15



V3T-15


DATASHEET

Dimensions




Electrical diagrams

V2T-15

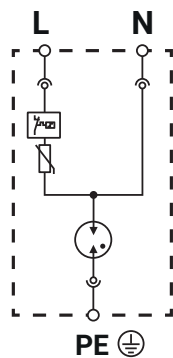

V3T-15

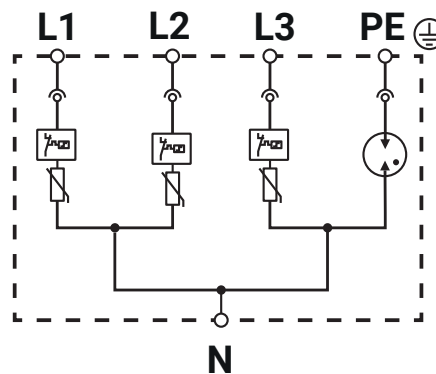



Technical specifications

	V2T-15	V3T-15
GENERAL	Rated voltage Un	230 VAC (L/N)
	Maximum voltage Uc	320 VAC (L/N)
	Frequency	50-60 Hz
	Maximum terminal cross-section	16 mm ²
	Upstream protective fuse	63 A gL
	Environmental limits	-40 ° +80 °C
	Degree of protection	IP20
	Mounting	Rail DIN 35
	N° of DIN modules	1
	Dimensions (width x height x depth)	18 x 90 x 66 mm
OVERVOLTAGE	Average weight approx.	110 g
	Packed weight	120 g
	Level protection Up	≤1,5 kV
	Maximum discharge current (8/20μs) Imax (L-N / N-PE)	15 kA / 15 kA
	Rated discharge current (8/20μs) In (L-N / N-PE)	8 kA / 10 kA
COMPLIANCE	Overvoltage response time	≤100 ns
	Type	2
COMPLIANCE	Directives	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Standards	IEC / EN 61643-11:2012+A11:2018

Models

V2T-15

Code	Reference
10002463	V2T-15
10002749	V2T-15B

Scan for more
information:



V3T-15

Code	Reference
10002464	V3T-15

Scan for more
information:

