





V2T-5

Surge arrester for the protection of the end **equipment**.
Type 3.




DATASHEET

Dimensions

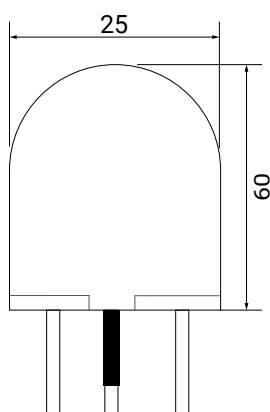

Electrical diagram

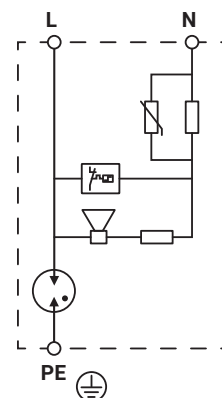

Models

Code	Reference
10002139	V2T-5

Scan for more information:





Technical specifications

GENERALS	Rated voltage Un	230 VAC
	Maximum voltage Uc	320 VAC
	Frequency	50-60 Hz
	Maximum terminal cross-section	1 mm ²
	Upstream protective fuse	16 A gL
	Environmental limits	-25 ° +40 °C
	Protection	IP20
	Mounting	Rail DIN 35
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	25 x 60 x 20 mm
OVERVOLTAGE	Average weight approx.	15 g
	Level protection Up (L-N / N-PE)	≤1.5 kV
	Maximum discharge current (8/20 μs) I _{max} (L-N / N-PE)	6 kA
	Rated discharge current (8/20 μs) I _n (L-N / N-PE)	3 kA / 5 kA
	Overvoltage response time	≤25 ns
	Type	3
	Product standards	IEC/EN 61643-11