



V2T-10



Module for protection against **transient overvoltages**.

Type 3.




DATASHEET

Dimensions

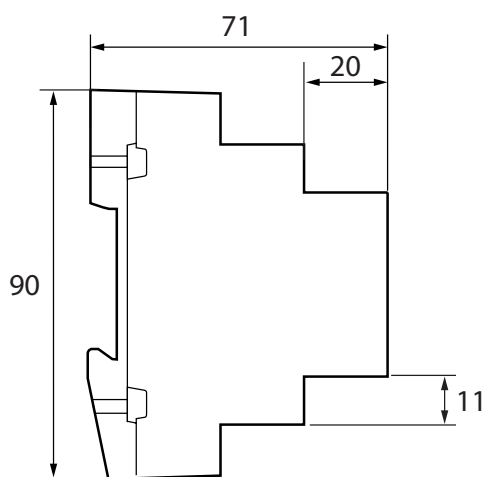

Electrical diagram

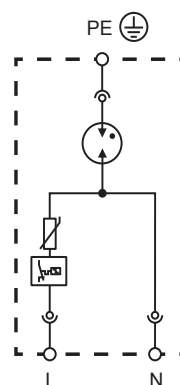

Models

Code	Reference
10002720	V2T-10

Scan for more information:





Technical specifications

GENERALS	Rated voltage Un (L-N)	230 VAC
	Maximum voltage Uc (L-N)	275 VAC
	Frequency	50-60 Hz
	Maximum terminal cross-section	6 mm ²
	Upstream protective fuse	63 A gL
	Environmental limits	-40 ° +80 °C
	Protection	IP20
	Mounting	Rail DIN 35
	Nº of DIN modules	1
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
OVERVOLTAGE	Dimensions (width x height x depth)	18 x 90 x 71 mm
	Average weight approx.	57 g
	Level protection Up (L-N / N-PE)	≤1,2 kV / ≤1,5 kV
	Maximum discharge current (8/20µs) Imax (L-N / N-PE)	10 kA / 10 kA
	Rated discharge current (8/20µs) In (L-N / N-PE)	5 kA / 5 kA
	Overvoltage response time	≤25 ns
	Combined wave voltage (Uoc)	10 kV
	Type	3
	Product standards	IEC/EN 61643-11