

SURGE PROTECTIVE DEVICE



VxT-60

Module for protection against **transient overvoltages**.

Type 2.






V2T-60




V3T-60

Dimensions

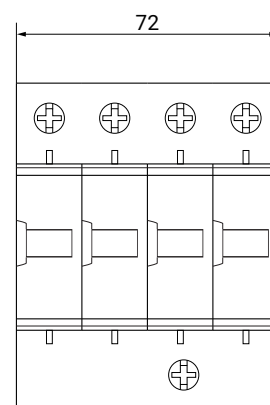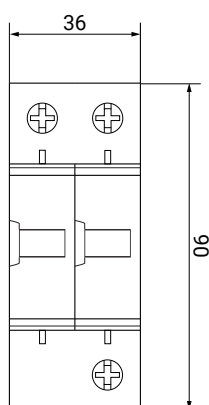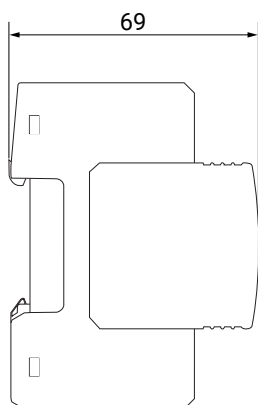


Electrical diagrams

V2T-60

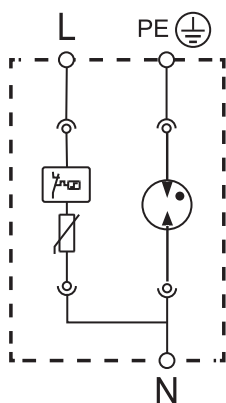

V3T-60

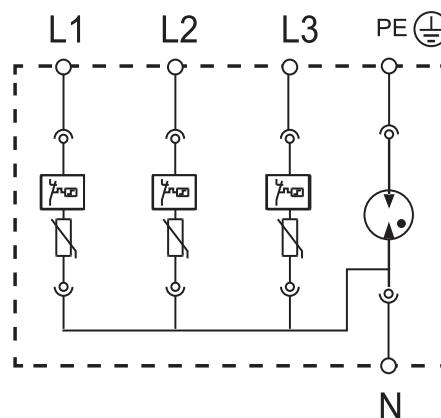



Technical specifications

	V2T-60	V3T-60
GENERALS	Rated voltage Un (L-N)	240 VAC
	Maximum voltage Uc (L-N)	320 VAC
	Frequency	50-60 Hz
	Maximum terminal cross-section	25 mm ²
	Upstream protective fuse	63 A gL
	Environmental limits	-40 ° +80 °C
	Protection	IP20
	Mounting	Rail DIN 35
	N° of DIN modules	2
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	36 x 90 x 69 mm
	Average weight approx.	240 g
OVERVOLTAGE	Level protection Up (L-N / N-PE)	≤1,8 kV / ≤1,5 kV
	Maximum discharge current (8/20 μs) I _{max} (L-N / N-PE)	60 kA / 60 kA
	Rated discharge current (8/20μs) I _n (L/N)	30 kA / 60 kA
	Impulse current (10/350 μs) I _{imp}	12,5 kA
	Overvoltage response time	≤25 ns
	Type	2
	Product standards	IEC/EN 61643-11

Models

V2T-60

Code	Reference
10001699	V2T-60

Scan for more
information:



V3T-60

Code	Reference
10001700	V3T-60

Scan for more
information:

