





V2TI-10

Module for protection
against **transient
overvoltages**.
Type 2+3.




DATASHEET

Dimensions



Electrical diagram

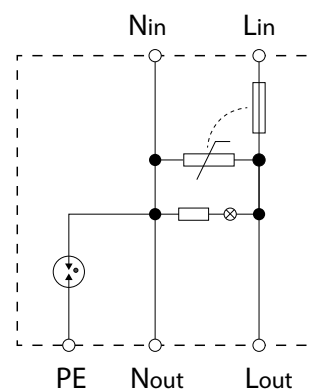

Models

Code	Reference
10003768	V2TI-10

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un (L-N)	230 VAC
	Maximum voltage Uc (L-N)	320 VAC
	Frequency	50-60 Hz
	Maximum terminal cross-section	4 mm ²
	Environmental limits	-40 ° +80 °C
	Protection	IP20
	Mounting	Rail DIN 35
	N° of DIN modules	1
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	17.7 x 79.5 x 38 mm
	Average weight approx.	42 g
OVERVOLTAGE	Level protection Up (L-N / N-PE)	≤1,5 kV / ≤1,8 kV
	Maximum discharge current (8/20μs) I _{max}	10 kA
	Rated discharge current (8/20μs) I _n	6 kA
	Combination wave (1.2/50μs) U _{oc}	10 kV
	Overvoltage response time (L/N - N/PE)	≤25 / ≤100 ns
	Type	2+3
	Product standards	IEC/EN 61643-11