





V2TL-10 2.0

**Transient surge protector
for single-phase LED
lighting.**


Type 2+3.



Dimensions

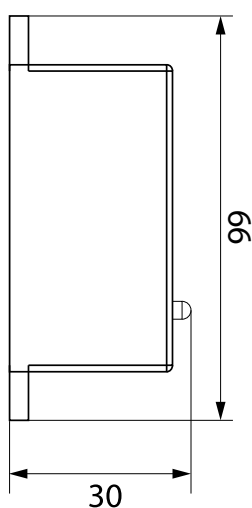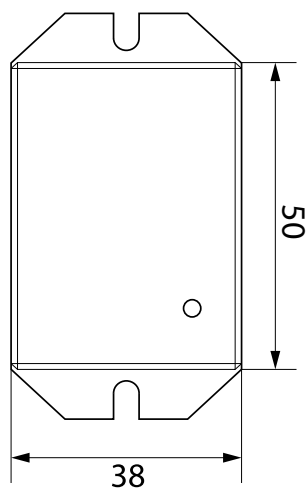

Electrical diagram

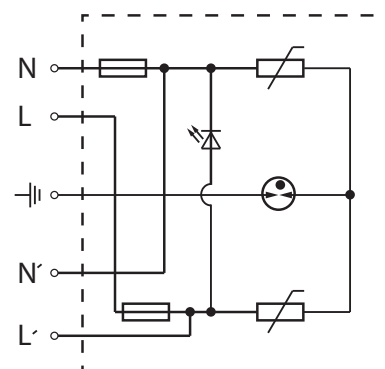

Models

Code	Reference
10003768	V2TL-10 2.0

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	230 VAC
	Maximum voltage Uc	275 VAC
	Frequency	50-60 Hz
	Maximum terminal cross-section	1 mm ²
	Cable length	110 mm
	Environmental limits	-40 ° +80 °C
	Protection	IP65
	Mounting	Aerial
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	65 x 37 x 29 mm
	Average weight approx.	9 g

OVERVOLTAGE	Level protection Up	≤1.6 kV
	Maximum discharge current (8/20μs) I _{max}	10 kA
	Rated discharge current (8/20μs) I _n	5 kA
	Combination wave (1.2/50μs) U _{oc}	10 kV
	Overvoltage response time	≤100 ns
	Insulation class luminaires	Suitable for class I and II
	Type	2 + 3
	Product standards	IEC/EN 61643-11