



VT


Transient surge arrester,
lines and signals.

Type 3.




DATASHEET

Dimensions

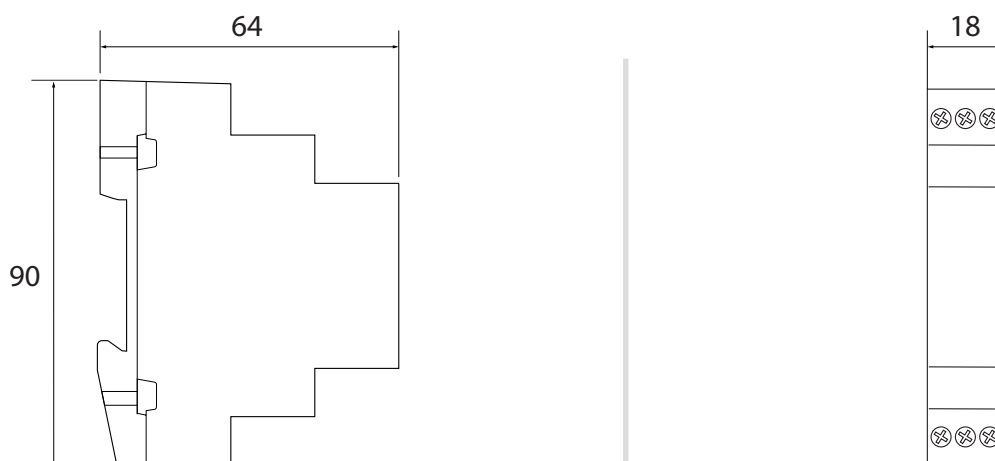

Electrical diagrams

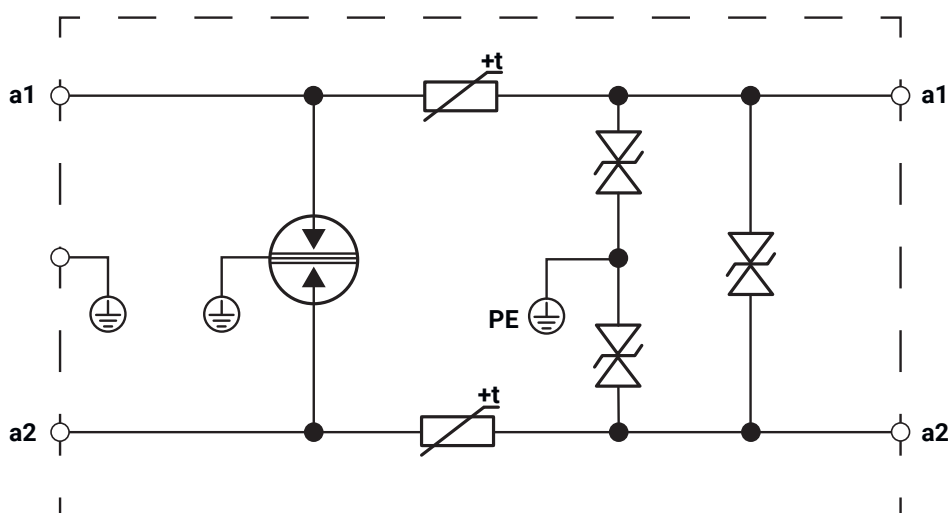



Technical specifications

GENERALS	Rated voltage Un	12 - 24 VAC/VDC
	Maximum voltage Uc	30 VAC/VDC
	Bandwidth	4 MHz
	Maximum terminal cross-section (input / output)	2.5 / 4 mm ²
	Signals	Profibus/4-20
	Mounting	Rail DIN 35
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	18 x 90 x 64 mm
	Average weight approx.	36 g
OVERVOLTAGE	Level protection Up	40 VAC/VDC
	Maximum discharge current (8/20µs) I _{max}	10 kA
	Rated discharge current (8/20µs) I _n	5 kA
	Type	3
	Product standards	IEC/EN 61643-21

Models

VT-12

Code	Reference
10002499	VT-12

Scan for more information:



VT-24

Code	Reference
10002500	VT-24

Scan for more information:

