





PL-232

Transient Surge Protector,
for signal lines with **RS-232**
serial port.
Type 3.




DATASHEET

Dimensions

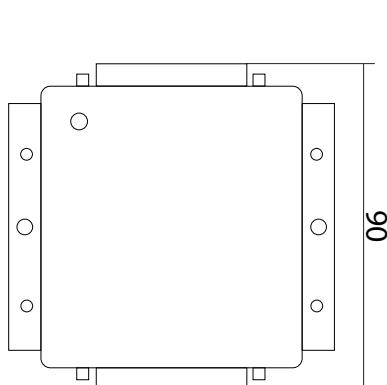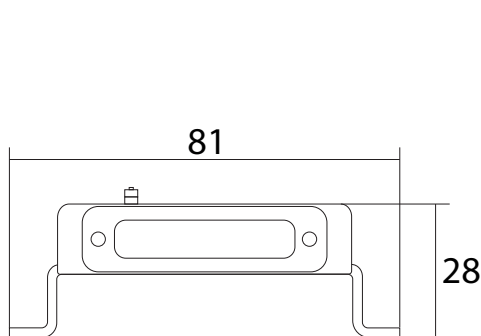

Electrical diagram

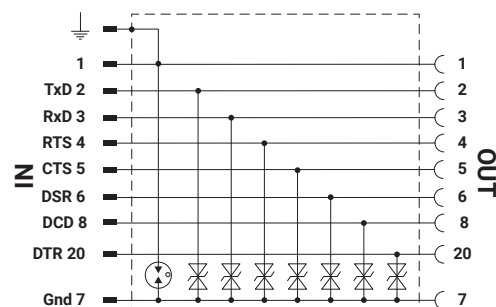

Models

Code	Referenc
10002492	PL-232

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	12 VDC
	Maximum voltage Uc	15 VDC
	Protection	IP20
	Mounting	Aerial
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	81 x 28 x 90 mm
	Average weight approx.	80 g
OVERVOLTAGE	Level protection Up	22 V
	Maximum discharge current (8/20µs) Imax	5 kV
	Rated discharge current (8/20µs) In	1 A
	Overvoltage response time	1 ns
	Input - output connection	DB-25
	Type	3
	Product standards	IEC/EN 61643-21