





DLTLF

Transient overvoltage
protector, **ADSL** telephone
lines.
Type 3.




DATASHEET

Dimensions

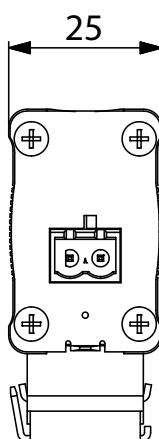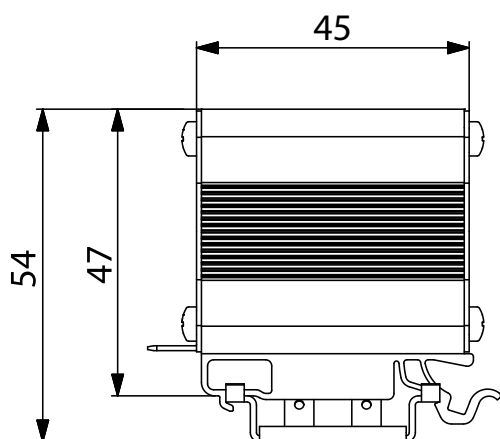

Electrical diagram

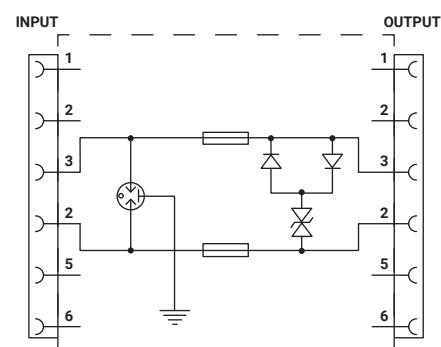

Models

Code	Reference
10002713	DLTLF

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	50 VAC
	Maximum voltage Uc	114 VAC / 162 VDC
	Frequency	40 Hz
	Environmental limits	-40 / 70 °C
	Protection	IP20
	Mounting	Rail DIN 35
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	25 x 45 x 54 mm
	Average weight approx.	80 g
OVERVOLTAGE	Level protection Up	260 V
	Maximum discharge current (8/20 µs) Imax	5 kA
	Rated discharge current (8/20 µs) In	2.5 kA
	Input / output connection	RJ11 / RJ11
	Overvoltage response time	1 ns
	Type	3
	Product standards	IEC/EN 61643-21