




CLSA-DSL

Transient overvoltage
protector, **CLSA-DSL** lines.
Type 3.




DATASHEET

Dimensions

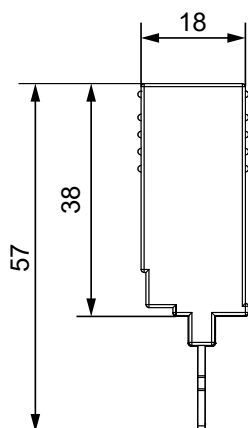

Electrical diagram

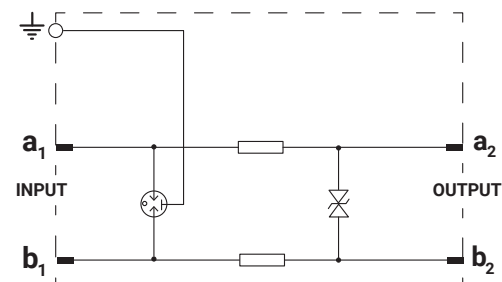

Models

Code	Reference
10002718	CLSA-DSL

Scan for more
information:





Technical specifications

GENERALS	Rated voltage Un	150 VDC
	Maximum voltage Uc	100 VDC
	Frequency	5 MHz
	Environmental limits	-40 / 70 °C
	Protection	IP20
	Mounting	LSA disconnection rail
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	9.4 x 18 x 57 mm
	Average weight approx.	120 g
OVERVOLTAGE	Level protection Up	260 V
	Maximum discharge current (8/20 µs) Imax	5 kA
	Rated discharge current (8/20 µs) In	2.5 kA
	Input / output connection	LSA disconnection rail
	Overvoltage response time	1 ns
	Type	3
	Product standards	IEC/EN 61643-21