





COMBI-PRO-FIRE

String disconnect switch **for firefighters.**




DATASHEET

Dimensions

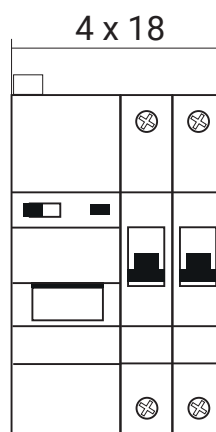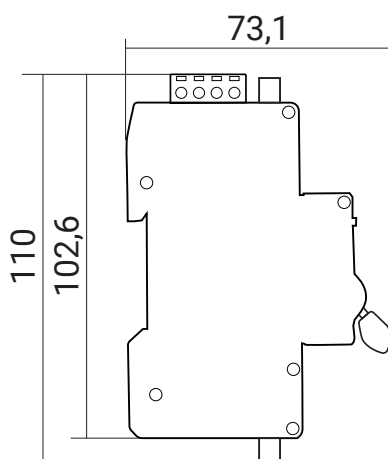


COMBI-PRO-FIRE-1000

6 x 18

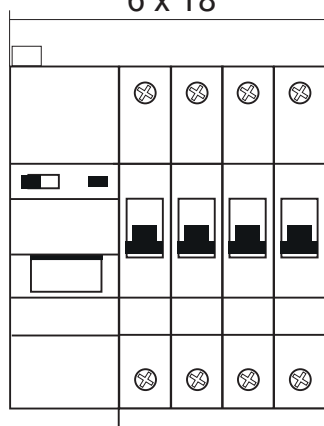

COMBI-PRO-FIRE-1500


8 x 18

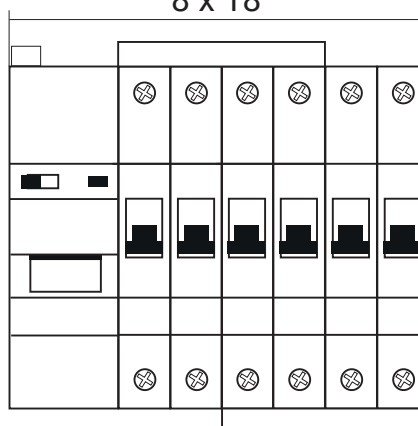




Electrical diagram


COMBI-PRO-FIRE-500

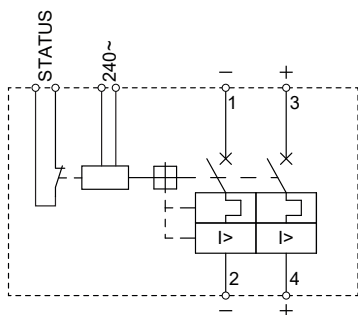

COMBI-PRO-FIRE-1000

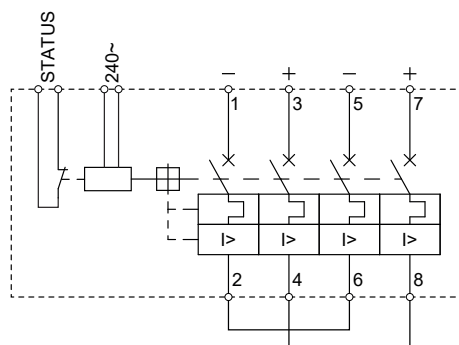

COMBI-PRO-FIRE-1500

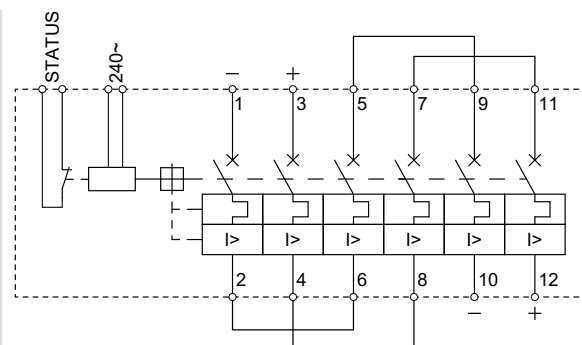

Technical specifications

	COMBI-PRO-FIRE-500	COMBI-PRO-FIRE-1000	COMBI-PRO-FIRE-1500
GENERALS	Rated voltage U_n		
	240 VAC		
	Frequency		
	50-60 Hz		
	Rated power consumption		
	1,5 W		
	Maximum terminal cross-section		
	25 mm ² (power) / 2,5 mm ² (control)		
MCB-DC	Environmental limits		
	-25° +55° C / 80% H.R.		
	N° of DIN modules		
	4	6	8
	Disconnection time DC		
	2 s		
	Reconnection time DC		
	2 s		
MECHANICAL	Contact		
	12VAC/VDC 0,1A		
	Rated current I_n		
	63 A		
	Tripping curve code		
	C		
	Breaking Capacity (I_{cn})		
	10 kA		
STANDARDS	Protection degree		
	IP20		
	Pollution degree		
	2		
	Power terminal torque		
	2,5 Nm		
	Mounting		
	Rail DIN 35		
STANDARDS	Weight		
	360 g	450 g	700 g
	Dimensions (width x height x depth)		
	72 x 102,6 x 73,1 mm	108 x 110 x 73,1 mm	144 x 110 x 73,1 mm
	MCB-DC		
	UNE-EN EIC 60947-2		
	ARD		
	UNE-EN EIC 63024		

Models

Code	Reference
10005778	COMBI-PRO-FIRE-500
10005779	COMBI-PRO-FIRE-1000
10005780	COMBI-PRO-FIRE-1500

Scan for more information:

